



ZINTRA TILES


ETCH, PATTERN, PLAIN
INSTALLATION INSTRUCTIONS

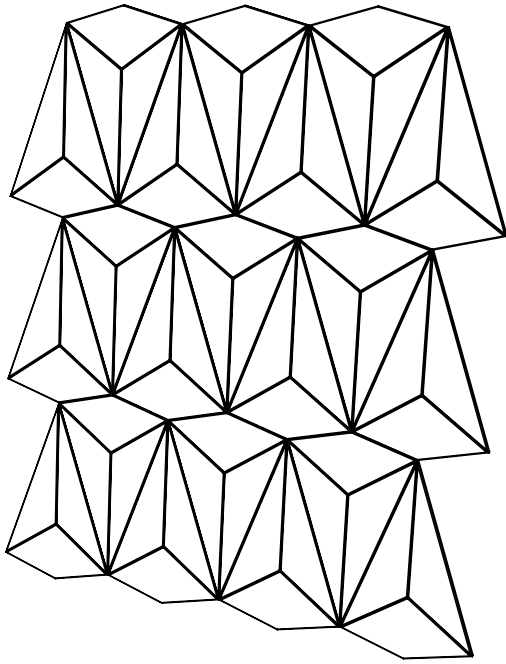

TYPICAL SHOWN: ETCH TILE DIAMOND

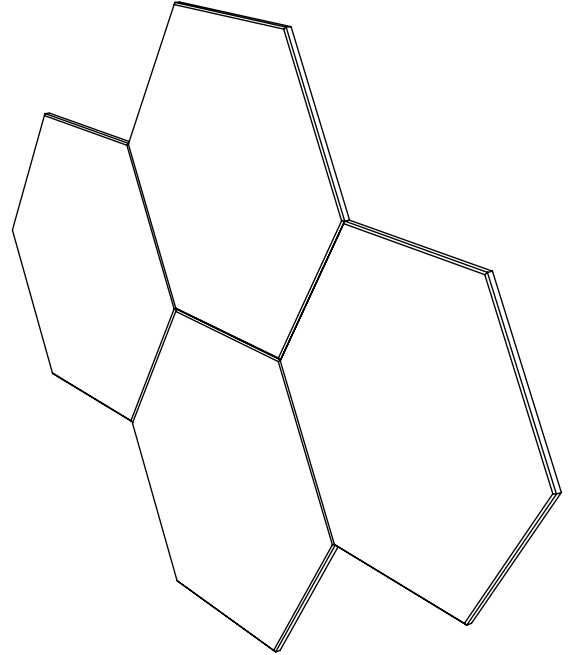


TYPICAL SHOWN: PLAIN TILE HEX

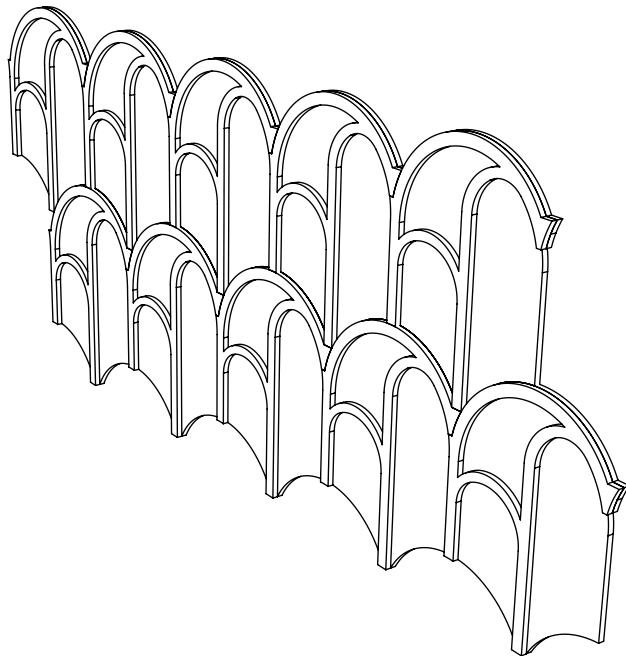


TYPICAL SHOWN: PATTERN TILE ARCH

PARTS AND HARDWARE


PANELS

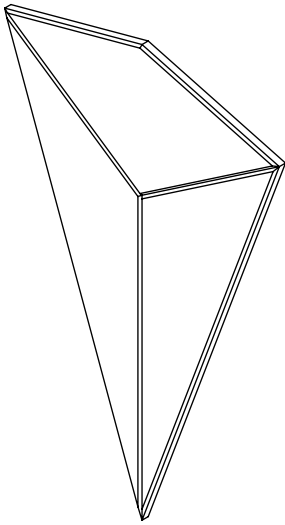


TYPICAL SHOWN: ETCH TILE DIAMOND

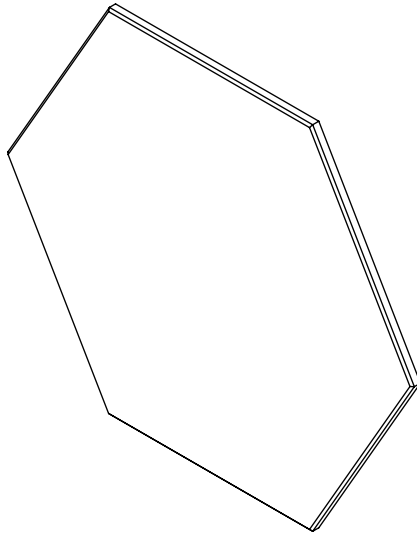


TYPICAL SHOWN: PLAIN TILE HEX

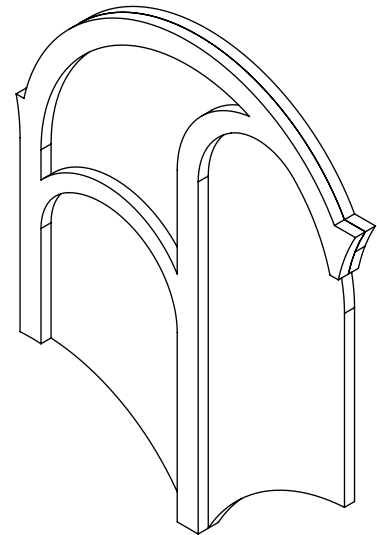


TYPICAL SHOWN: PATTERN TILE ARCH

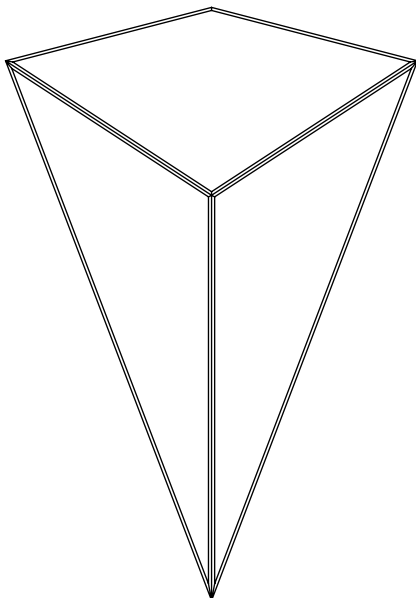

TYPICAL SHOWN: ETCH TILE DIAMOND

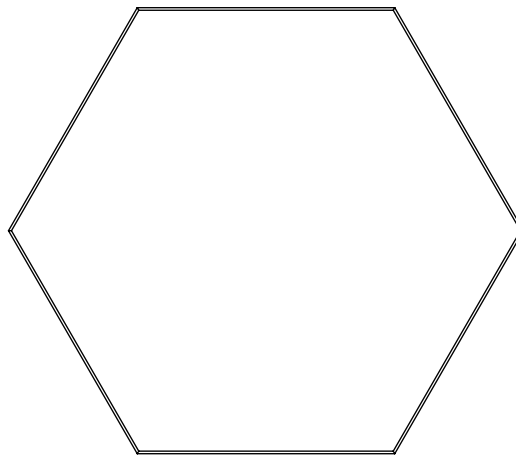

TYPICAL SHOWN: PLAIN TILE HEX

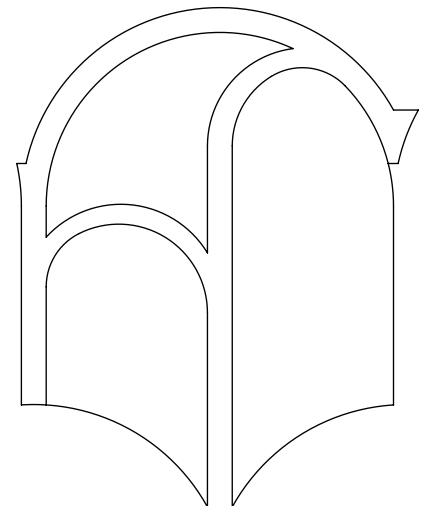

TYPICAL SHOWN: PATTERN TILE ARCH


ZINTRA TILES

ETCH, PATTERN, PLAIN


INSTALLATION INSTRUCTIONS

YOU WILL NEED


SPIRIT LEVEL




TAPE MEASURE




LOCTITE POWER GRAB EXPRESS HEAVY DUTY CONSTRUCTION ADHESIVE (USA)
PATTEX PL200 (EU)




APPROPRIATE APPLICATOR



LASER LEVEL



STANLEY KNIFE



ZINTRA TILES


ETCH, PATTERN, PLAIN

INSTALLATION INSTRUCTIONS

TYPICAL SHOWN: PATTERN TILES ARCH




STEP 1

Use Laser level to mark out the position of each tile.

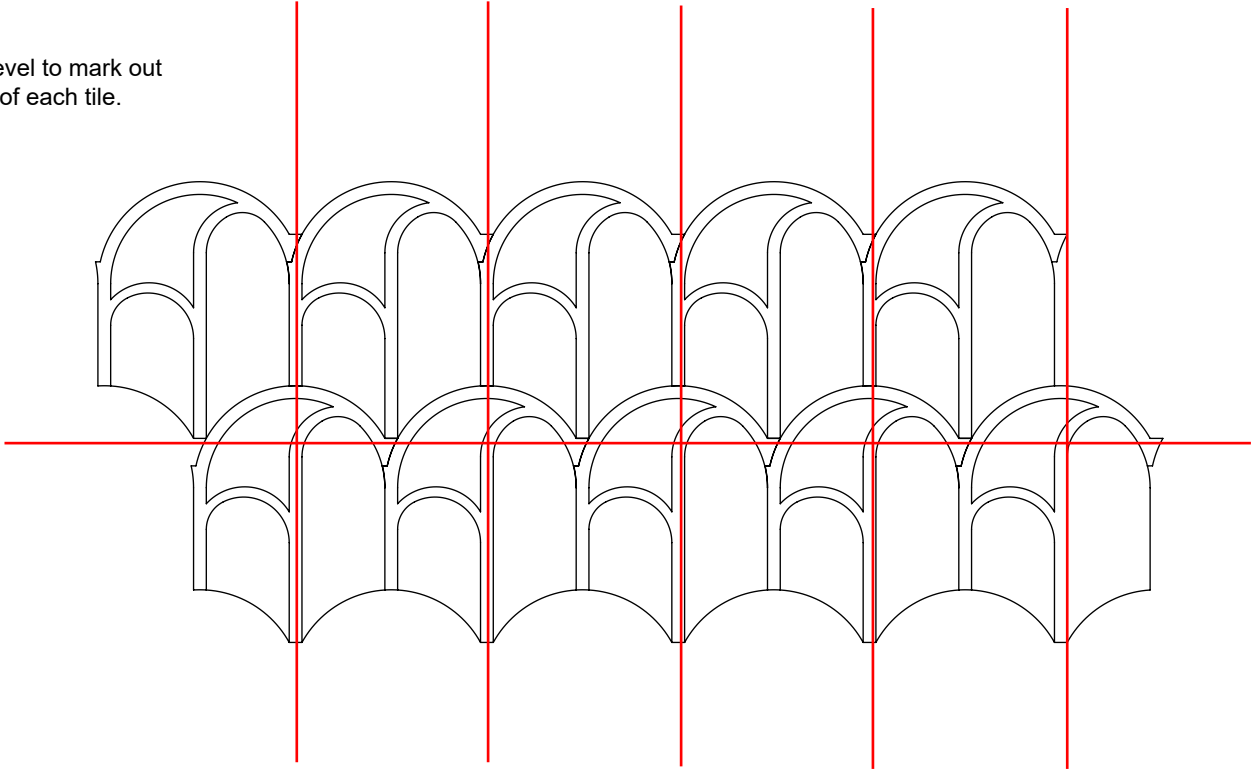

EXAMPLE OF MEASUREMENTS FOR RESPECTIVE DESIGNS BELOW:

NOTE: MEASUREMENTS MAY VARY DEPENDING ON ORDER.
CHECK GA DIMENSIONS BEFORE PLUGGING IN LASER LEVEL
DIMENSIONS

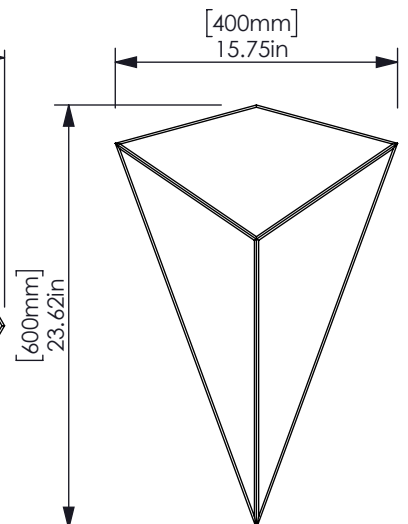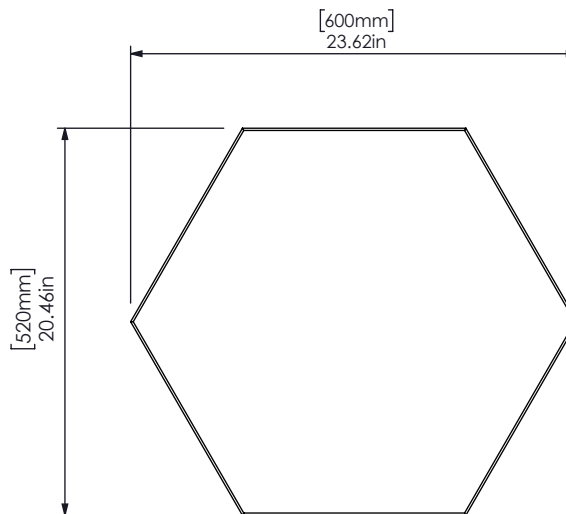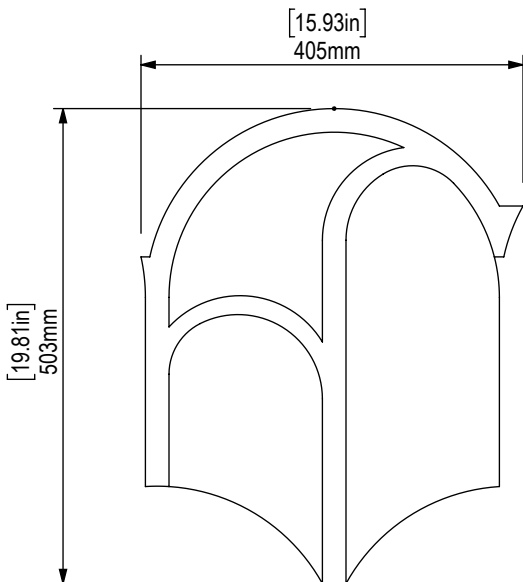

ZINTRA TILES

ETCH, PATTERN, PLAIN


INSTALLATION INSTRUCTIONS

STEP 2

Be certain that your substrate will hold an adequate bond to the recommended adhesive(s). If in doubt about a coating or a finish already in place, an adhesion mock up test is recommended before you begin.

Place the cartridge into the caulking gun, cut the nozzle to produce a 1/4" thick bead and puncture the inner seal. A 1/4" (0.64cm) bead will cover approximately 27 lineal feet (8.2 meters) per 9 fl oz tube.

Use Loctite Powergrab Heavy Duty Construction Adhesive or Pattex PL200 and follow suppliers instructions.

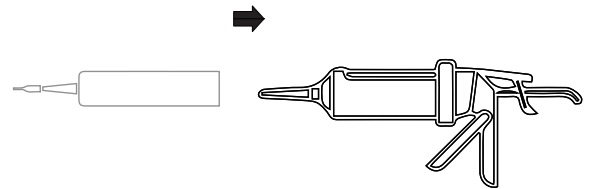


STEP 3

Once all of the panels have been properly sized and trimmed, begin the application of the adhesive to the **BACK SIDE (ONLY)** of each panel. Use only Loctite Powergrab Heavy Duty Construction Adhesive or Pattex PL200 and follow suppliers instructions.

First apply a bead around the entire perimeter of the **BACK** of the panel. Place the bead to be no more than 1" in from the perimeter at any point.

Next, apply a zig zag or diagonal pattern of additional adhesive across the central sections of the panel, within the perimeter bead. See the images on the right for guidance.

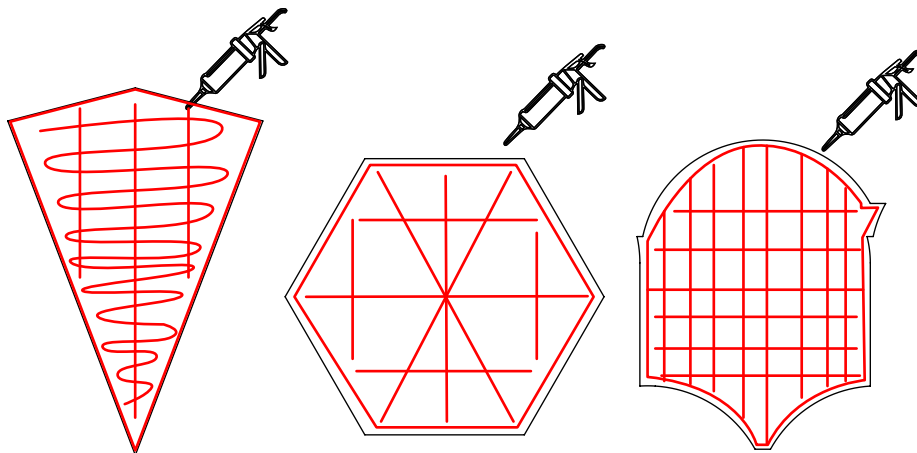

BACK SIDE ONLY

BACK SIDE ONLY

BACK SIDE ONLY

ZINTRA TILES

ETCH, PATTERN, PLAIN

INSTALLATION INSTRUCTIONS


STEP 4

MAKE SURE THE BACKSIDE HAS ADHESIVE


Apply the panel to the substrate within 20 minutes and monitor your adhesive to prevent it from skinning over. Set the panels into place and smooth with open palms.

Now, remove the panel from the substrate and hold it off the surface for one minute. Then reset the panel into place and smooth with firm pressure to set it. Use mechanical fasteners if you see the need to help this stay positioned while the adhesive remains wet.


Never use solvent based contact adhesives or any unauthorized adhesives.

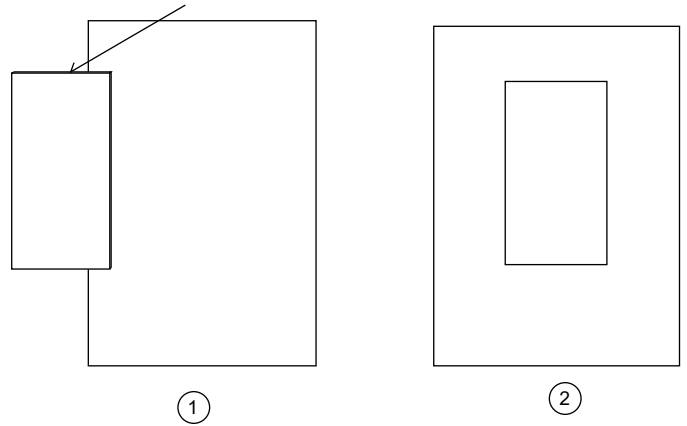

STEP 5 HOW DO I FINISH THE END?

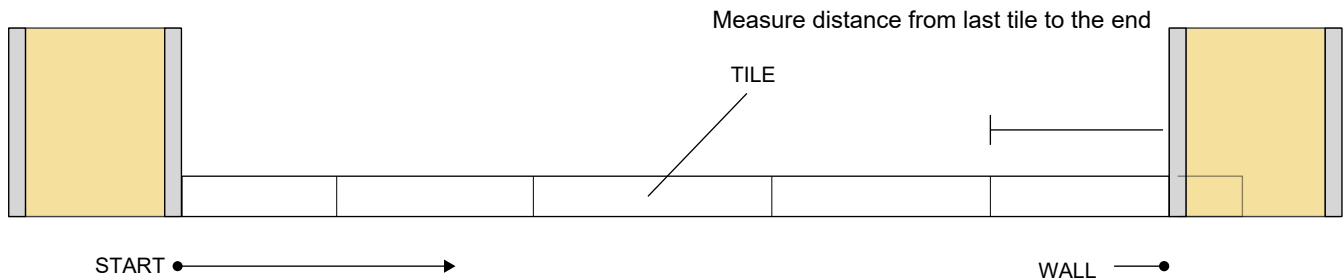

Mark your cutfile on the tile and make a shallow incision along the straight edge – this will ensure the front face of your panel has a neat cut. Work your way along the cut line with multiple shallow passes until cut through. This will usually take 3-4 passes.

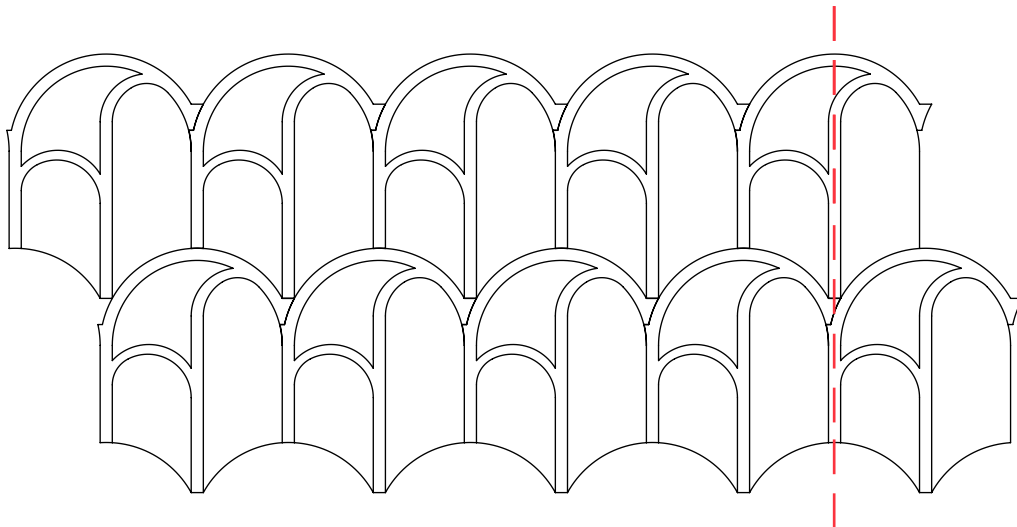




ZINTRA TILES

ETCH, PATTERN, PLAIN

INSTALLATION INSTRUCTIONS

STEP 6

Install tiles not affected by the wall protrusions. When you get to a GPO, window or door measure the X & Y dimensions from the **TILE**. Do not measure from the floor and wall as the tiles may not nest correctly.

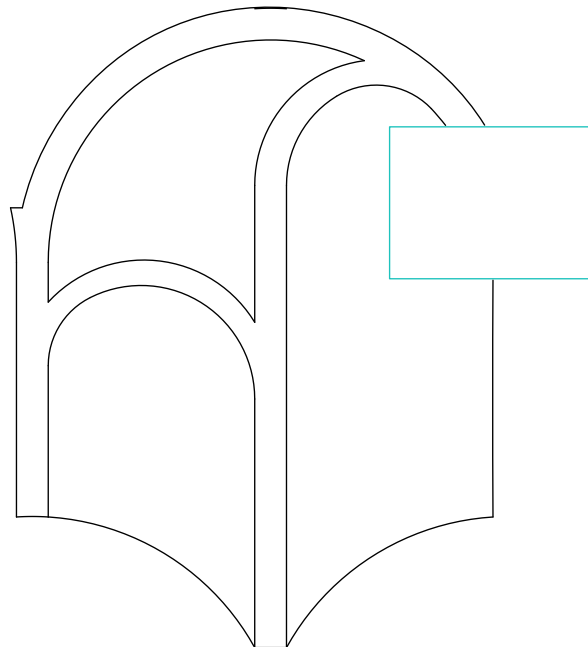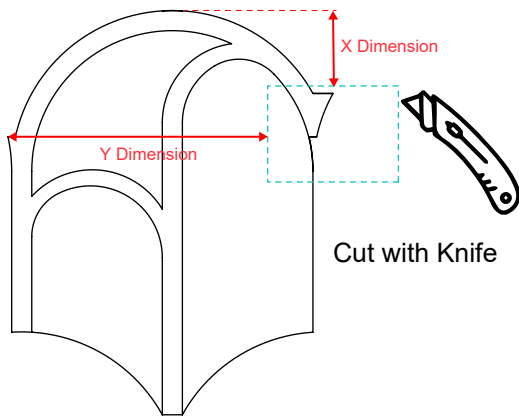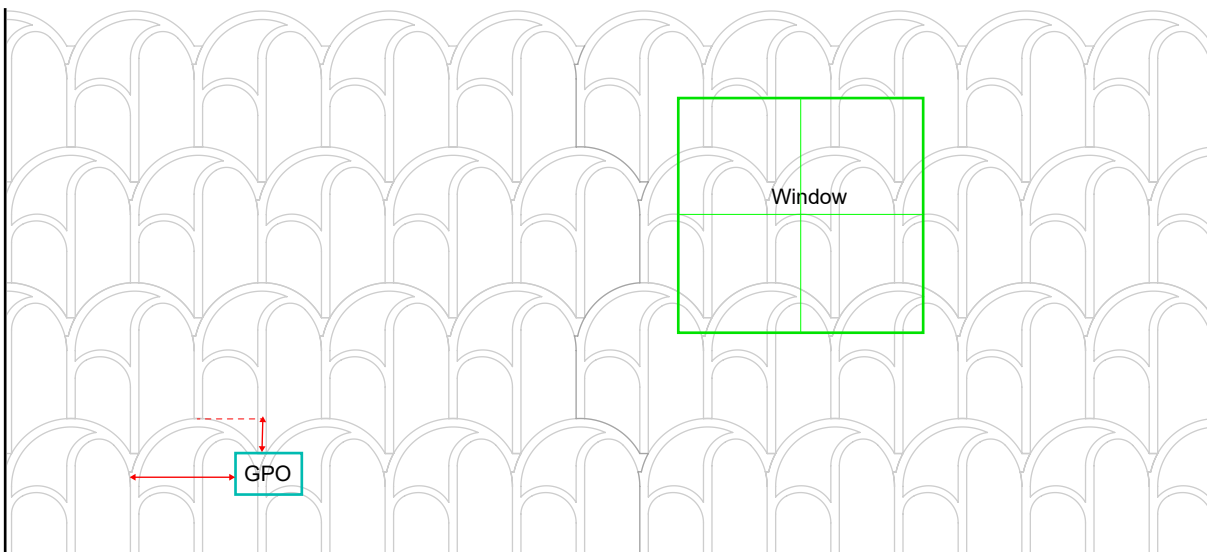

Note:
Dry fit after cutting,
to ensure tile fits.

Continuously go over
cutline to create clean
and tidy cut.