




66745 Aloe

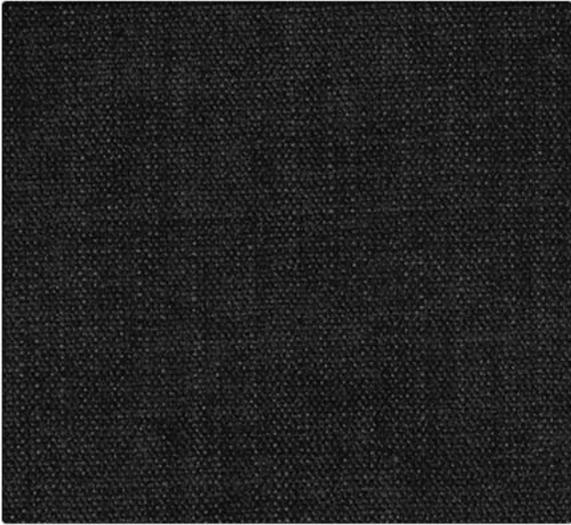


66764 Knight

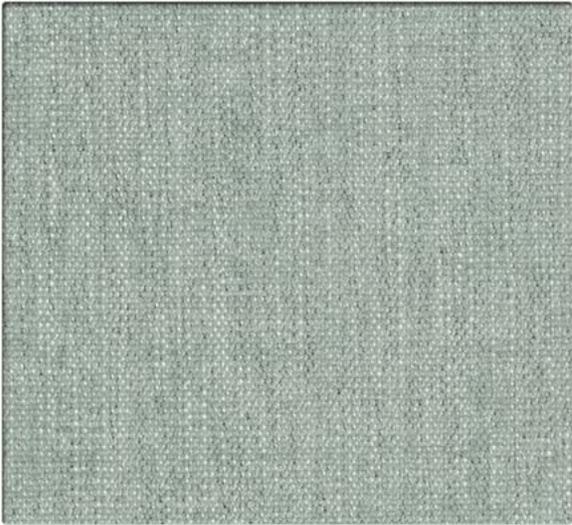


66747 Spearmint

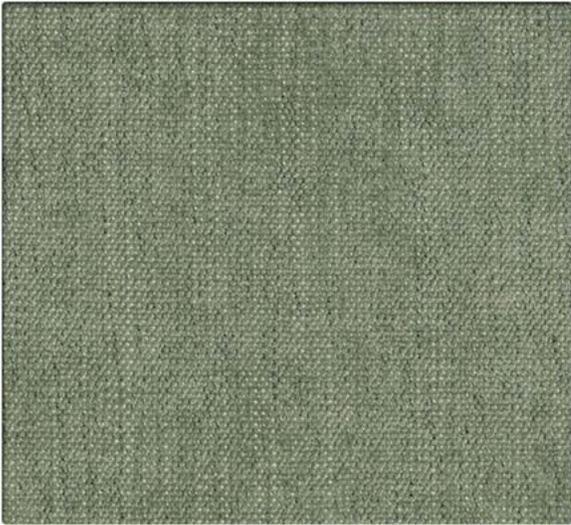

66748 Leaf

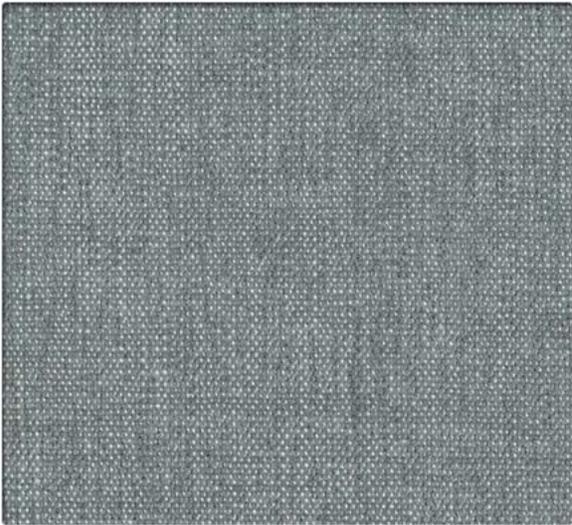


66749 Ice

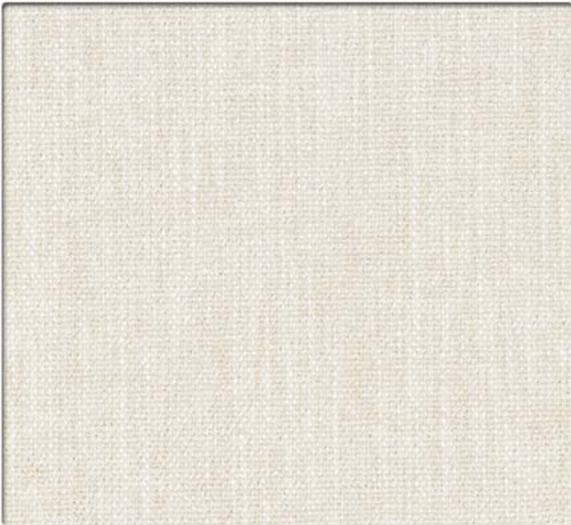

66750 Biscotti




66751 Koala

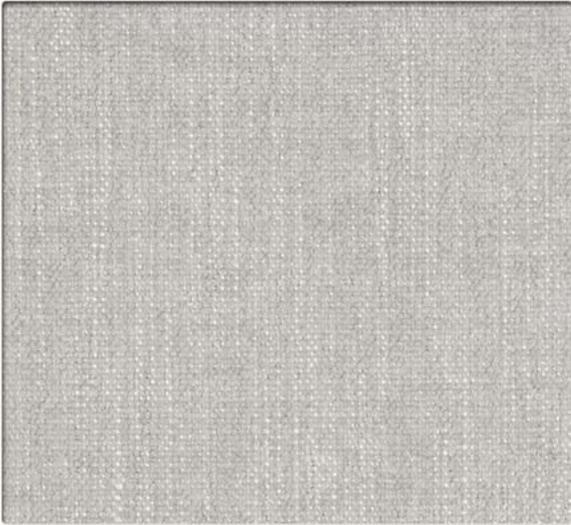


66752 Dove




66753 Fern

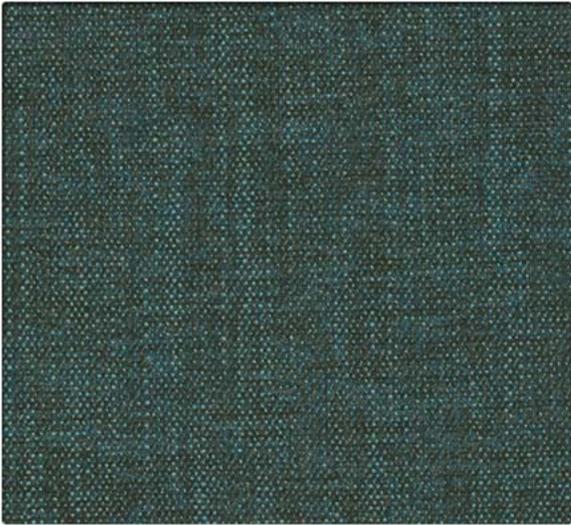


66754 Seaside

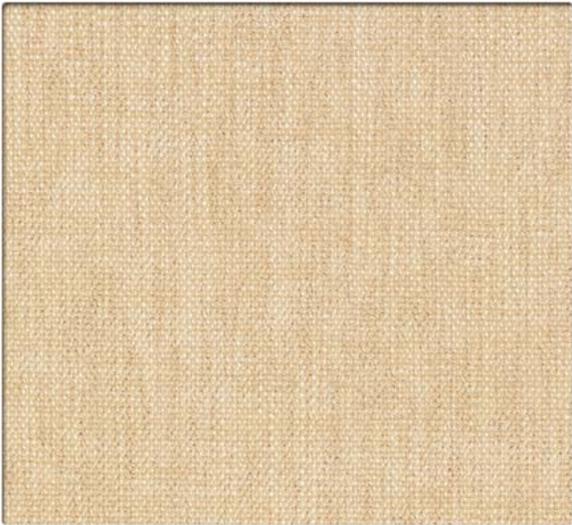


66755 Cornsilk

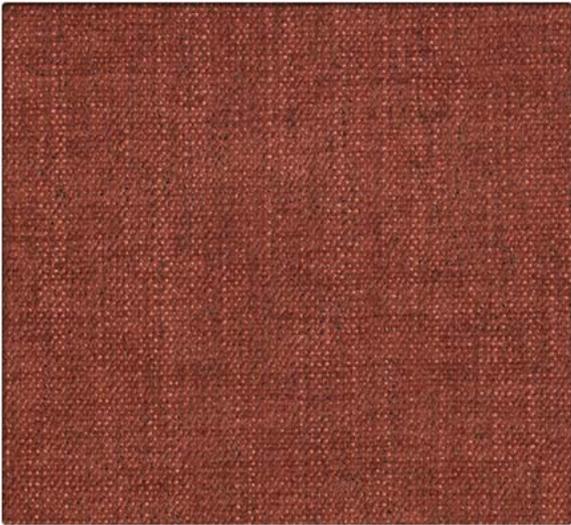

66756 Cranberry

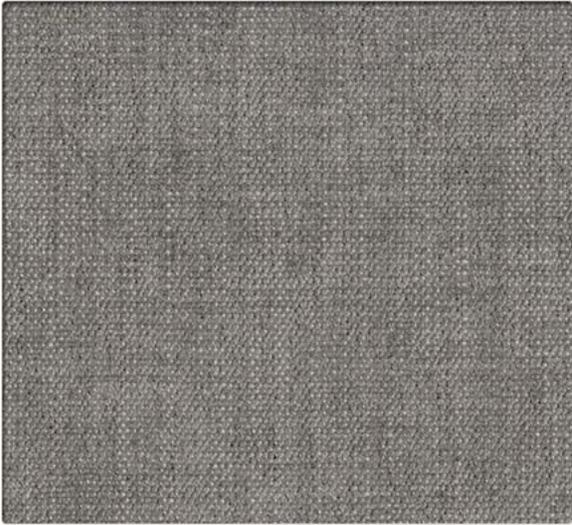

66757 Arrow

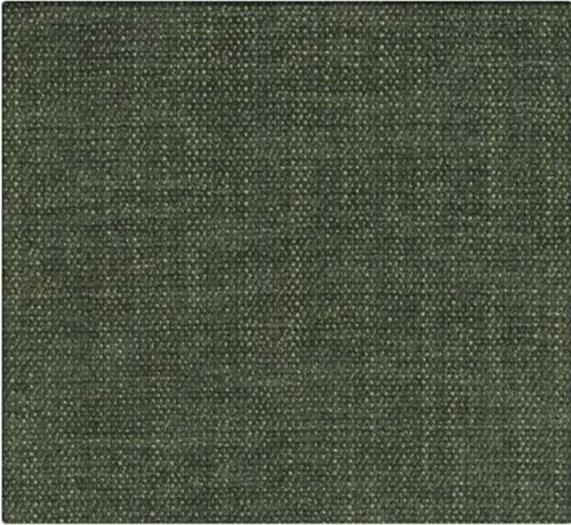


66758 Woodland



66759 Riptide




66760 Amber

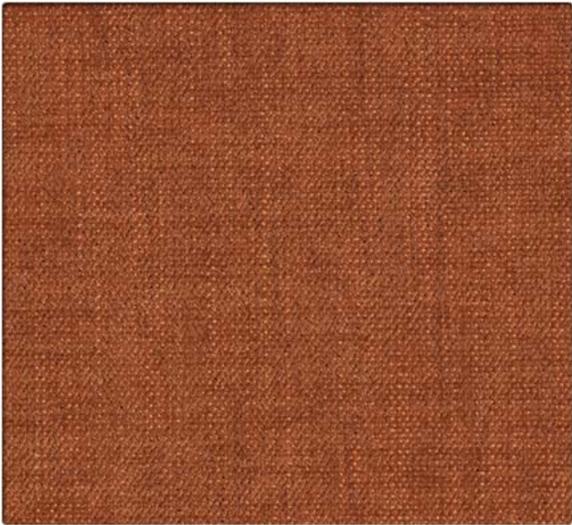


66761 Penny



66762 Aim

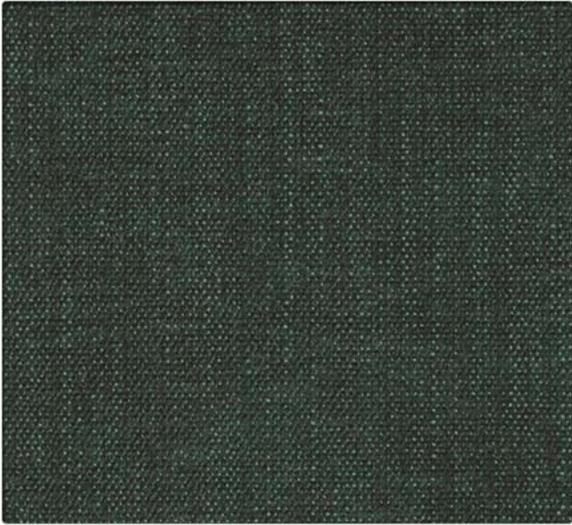

66763 Emerald

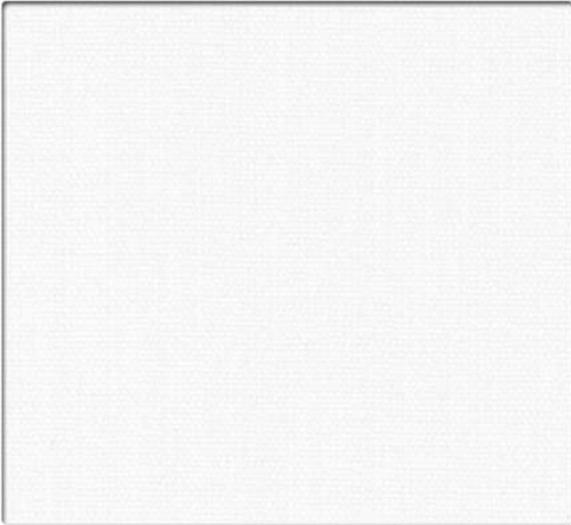

66746 Arctic

## Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Water-based stain protection
- Fluid barrier
- Contains an antimicrobial agent
- Bleach-solution cleanable

## Environmental

- GREENGUARD Gold Certified
- LBC Red List Free
- REACH Compliant
- RoHS Compliant
- No PFAS, fluorocarbons or perfluorinated compounds
- No added flame retardants

## Cleaning and Maintenance

Cleaning Code: **(W)** Clean with water-based foam or water-based cleaners only. Do not use solvents. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

Dye lots may vary slightly.

\* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

\*\* Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

## Specifications



Content	100% Polyester
Finish	Crypton® C-Zero / Non-PFAS / Water-Based Stain Resistant
Backing	Crypton® Integrated Fluid Barrier
Weight	20.1 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Roll Size	50 yards

## Performance Characteristics

Abrasion Resistance** ASTM D-4157	Exceeds 100,000 double rubs - heavy duty
Break Strength ASTM D-5034	Warp: 383.8 lbs. min., Fill: 351.1 lbs. min.
Tear Strength ASTM D-2261	Warp: 7.1 lbs. min., Fill: 26.1 lbs. min.
Seam Slippage ASTM D-4034	Warp: 61.5 lbs. min., Fill: 75.7 lbs. min.
Brush Pilling ASTM D-3511	Class 4.5 min.
Colorfastness to Light AATCC-16	40 Hours, Class 4.0
Crocking AATCC-8	Dry: Class 4.5, Wet: Class 4.5
Fluid Barrier	Crypton® Integrated Fluid Barrier
Antimicrobial	Crypton® fabric protection features silver ion technology which inhibits the growth of microbes on the protected surface.

## Flammability\*

California Technical Bulletin 117-2013 Section 1	Passed
NFPA 260	Class 1
UFAC	Class 1



# Stinson®

C.F. Stinson, LLC  
2849 Product Drive  
Rochester Hills, MI 48309

P 800 841 6279

F 248 299 3884

cfstinson.com