


## ZINTRA NDRF INSTALL GUIDE Non-Destructive Removable Fixing Kit

3

Total number of kits provided as required by P.O.

One Kit Contains:

12 x 3M Adhesive SJ4570 Dual Lock Tab (2" x 1") [50.8mm x 25.4mm]



12 x 3M Command™ Adhesive Large Picture Hanging Strip



Note: We supply above combination of 3M SJ4570 and 3M large picture hanging strips only. This combination has been tested and approved for use with Zintra panels. Any other combination or size of 3M command strips have NOT been tested and therefore we do not recommend nor accept any responsibility.

#### Step One:

Prepare wall surface to ensure ready for 3M adhesive strips. 3M recommend using rubbing alcohol to prepare surface. Do not use household cleaners or water.

Ensure that:

- walls have not been painted in the previous 7 days
- walls are free of wallpaper or similar debris
- wall condition is good to hold weight of panels being installed
- walls are not textured or rough as command strips will not adhere correctly

For more information on Command<sup>™</sup> adhesive picture hanging strips, and to check whether this install method is suitable for your wall surface go to <u>command.com/howtouse</u>.

## PAGE 1




## ZINTRA NDRF INSTALL GUIDE Non-Destructive Removable Fixing Kit

Step Two:

Apply 2"x1" SJ4570 Dual Lock Tab to back of Zintra by removing protective film. Fix according to recommended locations as per below. Press firmly on entire surface area of adhesive tab for 3-5 seconds to ensure secure bond.

Dual lock tab must sit 100% onto the flat surface of Zintra. For box tiles fix to face of corner support, prior to box being assembled.

For full Zintra panels and other panels sizes the recommended maximum distance between fixing points is 24" or 610mm. Increasing number of fixings will reduce "oil-canning" effect.

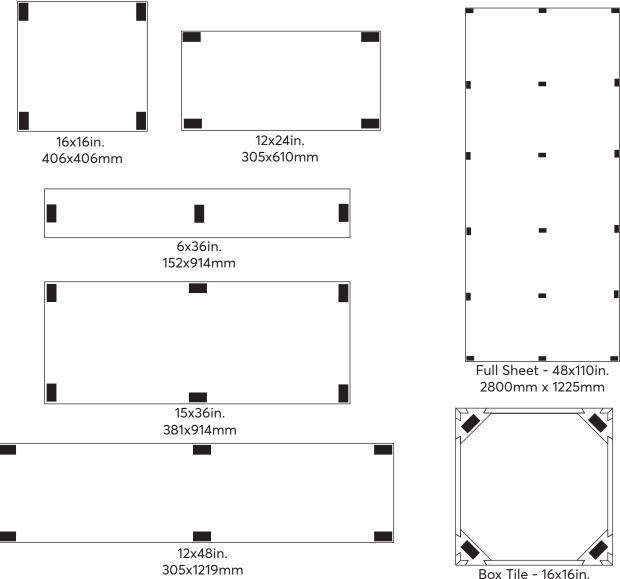

Box Tile - 16x16in 406x406mm




# ZINTRA NDRF INSTALL GUIDE

**Non-Destructive Removable Fixing Kit** 

#### Step Three:

Apply Command<sup>™</sup> Adhesive Large Picture Hanging Strips to Dual Lock tabs attached to the Zintra product. Ensure maximum coverage to dual lock tab for secure hold. Press down firmly allowing for tab connection to sit

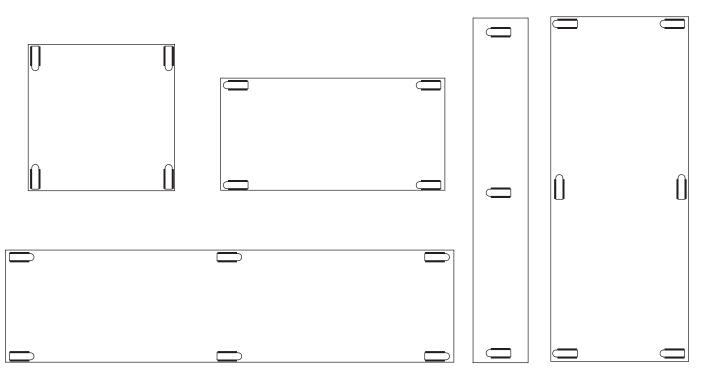

INDICATIVE INSTALL - REFER TO PREVIOUS PAGE FOR DIMENSIONS

### **Step Four:**

Remove protective film from Command<sup>™</sup> strip and apply tile or sheet to wall.

Make sure to apply firm pressure at all fixing points to ensure a secure bond to wall. Apply at least 20-30 seconds of pressure to the full panel. Allow the panels to sit for 3-5 minutes to ensure good adhesion to wall prior to removing or adjusting if panel needs to be realigned.