
QUARTER BAFFLESINSTALL GUIDE




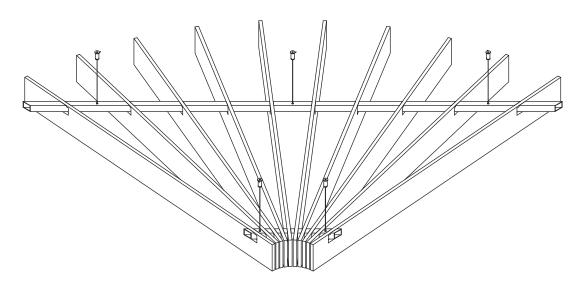

baresque.com.au e info@baresque.com.au p 1300 306 399


ASSEMBLY


1) Thread baffles onto the square mounting beams provided.

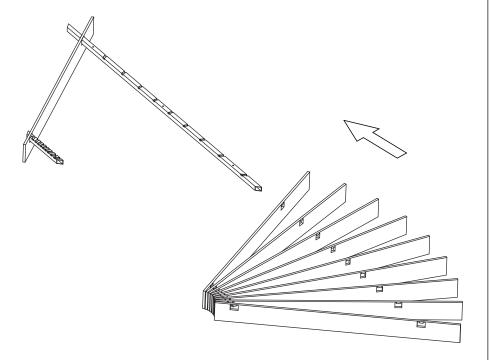


STEP 1

2) Lock each baffle into position by pushing downwards as shown.





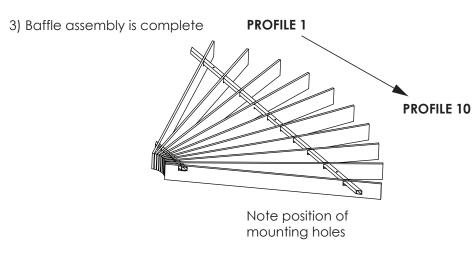



STEP 2 & 3



SUSPENSION METHOD

4) Place baffle assembly up to ceiling in desired location. Mark position of **6 off** through holes which correspond to the mounting holes.

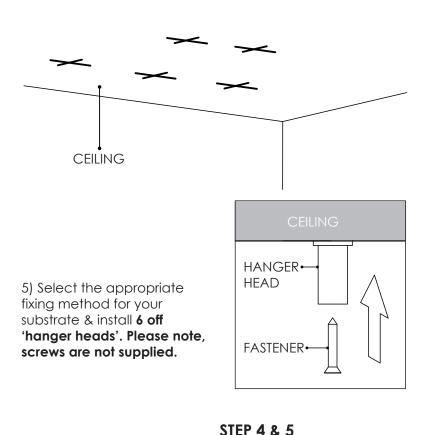

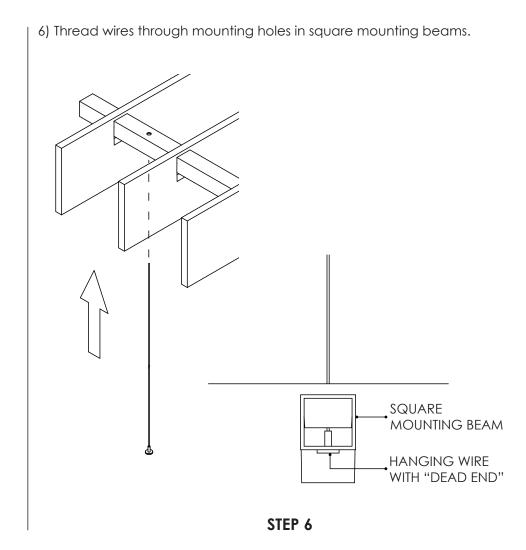





PLEASE NOTE: BAFFLE INSTALLATION WILL REQUIRE 2 PEOPLE.

SUSPENSION METHOD

7) Feed top of wire through tip of 'wire adjuster' (as shown). Push button (shown in grey) to adjust wire length. Release the button to lock in place.

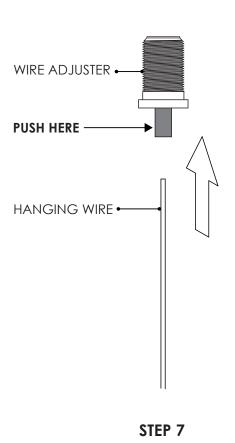


8) Feed wire through hole in the side of 'hanger head'. Screw 'wire adjuster' into 'hanger head'. When all wires are in place, adjust lengths so baffle assembly hangs level.

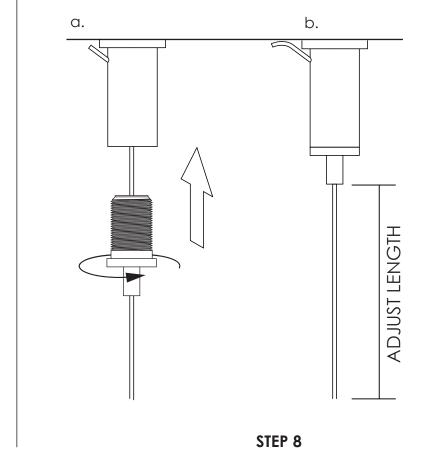



QUARTER BAFFLES SUSPENSION METHOD

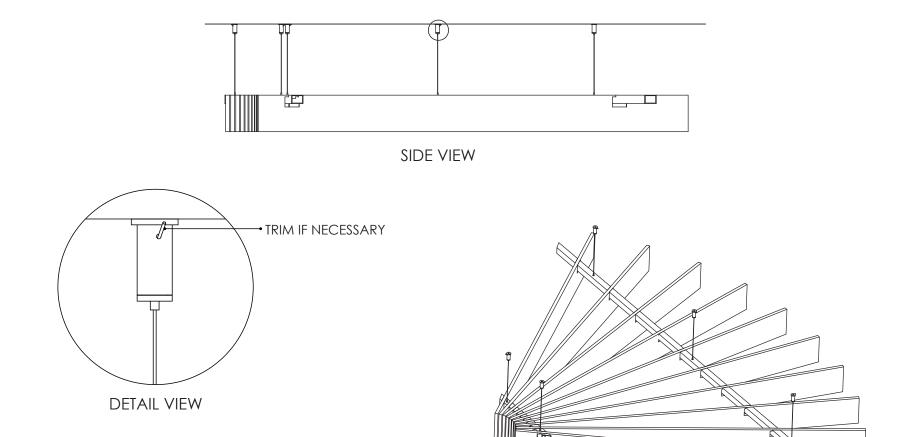


COMPLETED INSTALL



CONNECTOR & CAPPING DETAIL


CONNECTOR DETAIL


To connect multiple baffle assemblies together, insert connectors into open ends of square mounting beams and push assemblies together as shown.



CAPPING DETAIL


To cap ends of baffle assembly-insert end caps provided as shown.








5x WIRE ADJUSTER



4x END CAPS



5x HANGER HEAD




2x CONNECTORS



5x HANGING WIRE



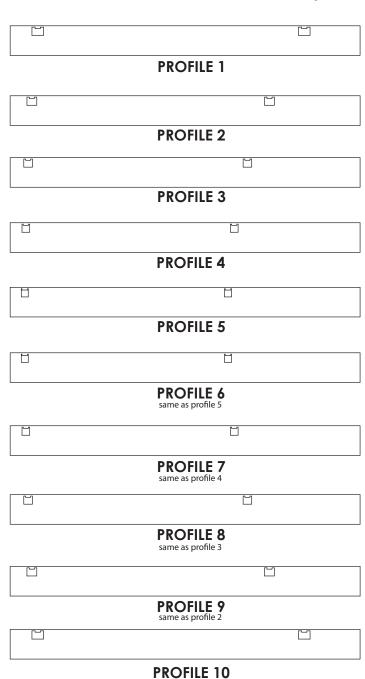

same as profile 1

QUARTER BAFFLES LAYOUT EXAMPLES PLAN VIEW **SNAKE OPTION - THIS EXAMPLE IS** MADE UP OF 4 QUARTER BAFFLE SYSTEMS FULL CIRCLE OPTION - THIS EXAMPLE IS MADE UP OF 4 QUARTER BAFFLE SYSTEMS

QUARTER BAFFLES

baresque INSTALL GUIDE