





Betonsilo 1025 H



Betonsilo mit liegender, runder Form und seitlichem Auslauf, schwere stabile Ausführung und Handradbetätigung des Patentverschlusses, mit Aufhängebügel.

Unsere Dimensionen:

Minimale Abweichungen vorbehalten
(Zeichnungen stellen Typ 1025H.10 dar.)

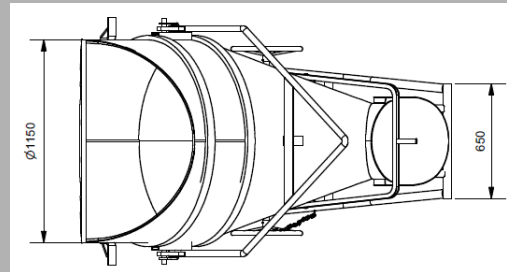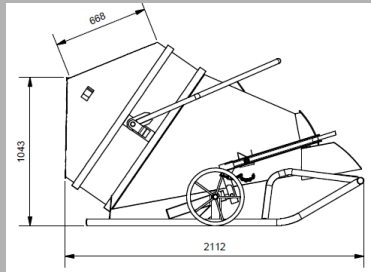

Typ	Inhalt	D	A	E	F	H	HB	Gew.
1025H.1	150	740	340	600	620	1020	1390	130
1025H.2	200	820	380	500	650	1400	1660	138
1025H.3	250	820	380	500	730	1500	1800	155
1025H.4	300	820	380	500	750	1550	1850	160
1025H.5	350	820	380	500	770	1600	1900	180
1025H.6	375	1150	420	650	800	1820	2400	225
1025H.7	400	1150	420	650	820	1850	2430	235
1025H.8	500	1150	420	650	850	1900	2480	260
1025H.9	600	1150	420	650	870	1930	2510	280
1025H.10	750	1150	650	668	1043	2112	2540	360
1025H.11	800	1150	420	700	940	1980	2560	390
1025H.12	1000	1150	420	700	980	2200	2780	460
1025H.13	1250	1400	500	850	1150	2400	3100	585
1025H.14	1500	1400	500	850	1200	2500	3200	630
1025H.15	1750	1400	500	850	1250	2600	3300	845
1025H.16	2000	1400	500	850	1300	2700	3400	870
1025H.17	2500	1600	600	900	1450	2800	3600	1080
1025H.18	3000	1600	600	900	1500	3000	3800	1220
1025H.19	3500	1600	600	900	1550	3200	4000	1340
1025H.20	4000	1600	600	900	1600	3400	4200	1400