

### **EU-TYPE EXAMINATION CERTIFICATE**



The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and has been shown to satisfy to essential health and safety requirements.

Certificate N° 0075/6119/161/11/24/2625

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :

Manufacturer: FRITZ GÖBEL GmbH & Co. KG

Am Friedrichsplatz 4, 34508 Willingen Rattlar

**GERMANY** 

**Description** 

PPE Type: a safety footwear

Product reference: PU Sicherheitsstiefel X-Agrifood S5 S

Article code : /

Construction and material of outsole: PU enjected

**Pictures:** 



Made in Turkey







production date of the 9.month of 2024.

Reference standard: EN ISO 20345:2022

Classification: II Category: S5S SR CI FO

Size range: 36 - 49

At the date of certificate the product is in compliance with Annex XVII of REACh regulation (n° 1907/2006 and revisions)

Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the manufacturer's technical file index 02 dated from NOVEMBER 2024 and the user instructions index Rev.0- 25/10/2024.

NOTA: Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V §7.2 of Regulation 2016/425. Any marking on the PPE which is not concerned by the Regulation (UE) 2016/425, is not covered by this certificate.

Issued in Lyon by

William GELAS
Certification manager



Date of first issue: 12 November 2024 End of validity date: 05 April 2029

Date of update 01: 15 November 2024



In application of the Regulation 2016/425 of the European parliament and the Council of 9th March 2016 related to Personal Protective Equipment and repealing the Directive 89/686/EEC.

www.ctcgroupe.com

cemarking@ctcgroupe.com







### FRITZ GÖBEL GmbH & Co. KG

## **MANUFACTURER'S TECHNICAL FILE**

**Reference of the product:**PU Sicherheitsstiefel X-Agrifood S5 S

Article code: /

Technical file index: 02

Last update: NOVEMBER 2024

### **IDENTIFICATION**

Reference of the product: PU Sicherheitsstiefel X-Agrifood S5 S

Article Code:

Technical file index: 02

Last update : NOVEMBER 2024

#### Manufacturer

FRITZ GÖBEL GmbH & Co. KG

Am Friedrichsplatz 4, 34508 Willingen Rattlar

**GERMANY** 

Tel: +49 5632 M594840

### **Factory**

POLLYBOOT ÇİZME SANAYİ VE Tic. SANAYİ A.Ş.

selimşahlar mah. Burcu sok. no:8 ŞEHZADELER/MANİSA

**TÜRKİYE** 

Tel: +90 236 222 2 999 Fax: +90 236 236 14 35

### **FOOTWEAR DESCRIPTION**

### **Footwear description**

The classification of this footwear is II : All-polymeric (i.e. entirely moulded) including all-rubber (i.e. entirely vulcanized) footwear.

The design of this footwear is D: knee-height boot.

### **Visual description**

General view:



### Outsole view:



Reference of the mould: POLLYBOOT Agrifood - aluminium (boot last)

### Range of sizes

36 - 49

### Construction and material of outsole

PU enjected

#### Field of use

FOOD; HEALTH, AGRICULTURE and LIVESTOCK

# Risk assessment (Essential Health and Safety Requirement. Annex II - PPE Regulation)

		Applicable		Covered by
	Requirements defined in the Annex II §1 are applicable to all PPE	$\boxtimes$	$\boxtimes$	Standard
§1			$\boxtimes$	Instruction for use
			$\boxtimes$	Marking
§1.4	Manufacturer's instructions and information is available	⊠		Standard
			$\boxtimes$	Instruction for use
				Marking
§2.2	PPE is designed and manufactured in a way that perspiration resulting from use is minimised. Otherwise it must be equipped with means of absorbing perspiration.	$\boxtimes$	$\boxtimes$	Standard
			$\boxtimes$	Instruction for use
				Marking
§2.4	If it is known that the design performance of new PPE may be significantly affected by ageing, the month and year of manufacture and/or, if possible, the month and year of obsolescence must be indelibly and unambiguously marked on each item of PPE placed on the market and on its packaging.	×		Standard
				Instruction for use
				Marking
	PPE is intended for use in potentially explosive atmospheres	$\boxtimes$	$\boxtimes$	Standard
§2.6			$\boxtimes$	Instruction for use
			$\boxtimes$	Marking
	PPE incorporating components which can be adjusted or removed by the		$\boxtimes$	Standard
§2.9	user		$\boxtimes$	Instruction for use
				Marking
§2.12	PPE bearing one or more identification markings or indicators directly or indirectly relating to health and safety		$\boxtimes$	Standard
			$\boxtimes$	Instruction for use
			$\boxtimes$	Marking
§2.14	Multi-risk PPE		$\boxtimes$	Standard
			$\boxtimes$	Instruction for use
			$\boxtimes$	Marking
	The PPE is intended to protect against impact caused by falling or ejected objects and collisions of parts of the body with an obstacle	$\boxtimes$	$\boxtimes$	Standard
§3.1.1			$\boxtimes$	Instruction for use
				Marking
	The PPE is intended to protect against falls due to slipping	$\boxtimes$	$\boxtimes$	Standard
§3.1.2.1			$\boxtimes$	Instruction for use
			$\boxtimes$	Marking
§3.2	The PPE is intended to protect against static compression of a part of the body	$\boxtimes$	$\boxtimes$	Standard
				Instruction for use
				Marking
§3.3	The PPE is intended to protect against mechanical injuries	$\boxtimes$	$\boxtimes$	Standard
			$\boxtimes$	Instruction for use
			$\boxtimes$	Marking
§3.7	Protection against cold		$\boxtimes$	Standard
			$\boxtimes$	Instruction for use
			$\boxtimes$	Marking

### **FOOTWEAR CONSTITUTION**

	Reference	Material	Color
UPPER	Suprasec 2783 = Emanat 783 Daltorez P 720 = Emapespol A 72 Daltoped AA 32300 = Emakat 323	Prepolimer Polyester poliol Component of a Polyurethane System	Khaki
INSOCK R23899EA0		binder, recycled PU foam, polyester fabric. Carbon	Black and orange
OUTSOLE	Suprasec 2783 = Emanat 783 Daltorez P 720 = Emapespol A 72 Daltoped AA 32300 = Emakat 323	Prepolimer Polyester poliol Component of a Polyurethane System	Black
	TPU, Elastollan® 565 A 12 P 000	Thermoplastic Polyester - Polyurethane	Red
TOE CAP	4522	Composite toecap	White and cream
INSERT	On protector Diamond	Non metallic antiperforation	

### **PROTECTION SCOPE**

#### **Basic requirements**

This product has been designed to be a safety footwear.

The applicable basic requirements are detailed in the following standard(s):

- EN ISO 20345:2022 Safety footwear

This product is a category II PPE.

At the date of the certificate, the product is in compliance with Annex XVII of the European REACh regulation (n° 1907/2006 and revisions)

### **Additional requirements**

The claimed additional requirements are:

- Closed seat region
- Cleated outsole
- Antistatic footwear
- Cold insulation
- Energy absorption of seat region
- Slip resistance (ceramic tile with glycerine)
- Outsole: Fuel oil resistance


### **MARKING - PACKAGING**

#### Information marked on the footwear

- \* Logo of the Manufacturer
- \* Logo **(€**
- \* Manufacturer's name or commercial brand
- Manufacturer's postal address
- Manufacturer's type designation
- \* Size
- \* At least year and month of footwear manufacture
- \* The number and year of the applicable specific standard(s)
- \* The appropriate codes of marking according to the applicable requirements and additional protection and performance claimed

#### Marking example



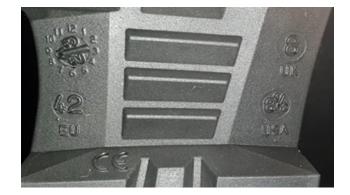



production date of the 9.month of 2024.

The location of the marking is: inner label

Method of marking on the footwear: There are two types of markings on the boot: the inner label (inside the boot) and the logo on the outside. Inner label is hot press. Other than boot, it is tampon printing. It is attached.

#### **Packaging**

Yes. It is attached.

# References of test reports performed in order to verify the compliance with the requirements of the technical rules:

Laboratory	References	Laboratory	References
CTC	L231019095_3	CTC	L240100266_1
CTC	L231019098_2	CTC	253710/EA
CTC	D201222237_1	CTC	L210610951-1
CTC	L231019100_3		

### **MEANS OF CONTROL**

If there is no customer demand, it is tested at least once every month. Mostly, tests are carried out according to customer demands. The tests requested by our customers are performed for customer orders over 500 pairs. Sample selection is as follows. Produced boots number and The number must be given to laboratory boots: 0-500 pairs, 1 pair; 501-1000 between pairs, 2 pairs; 1001-1500 between pairs, 3 pairs; 1501-2000 between pairs, 4 pairs..The boots size to be given to the laboratory for testing will be selected from small (36-37-38-39), medium (41-42-43) and large (45-46-47-48-49) sizes, respectively. The lengths of the boots to be tested after each order; if it is small it will change to medium, if it is medium to large, if it is large it will change to small number. For example, if small numbers were tested in the previous order, medium numbers will be tested in this order, and large numbers will be tested in the next order. Generally, impact and compression tests are performed. In addition, we have the opportunity to perform the following tests in our laboratory. Antistatic properties, Energy absorption of seat region, Resistance to fuel oil, Impact test, Compression test, Penetration resistance, Tear strength, Tensile strength, Abrasion resistance, Flexing resistance, Hydrolysis, Interlayer bond strength



### PPE subject to ageing :

The design performance of this product can be affected by ageing. The peremption period is estimated at 3 years when stored in appropriate conditions (humidity, temperature, clean, ventilated, light). Before use, the footwear shall be visually controlled, in case of deterioration the footwear must be scrapped (abrasion, cut, tear...).

### **Declaration of conformity:**

The UE declaration of conformity is available with each product.

The EU declaration of conformity can be accessed on the website: www.fritzgobel.de