


T8 HFI Stick-Lite

Display lighting



- Used in thousands of different applications the T8 HFI Stick-Lite allows designers the advantage of 360 degrees of light output with the electronics incorporated at one end of the light. 3.2m power lead and plug set, 20,000 hour rated triphosphor lamp, high frequency electronic ballast, mounting clips, hooks for suspension, 14 totally fade free colours, any way up mounting and floor stand, all combine to give instant cost effective lighting displays with high visual impact.

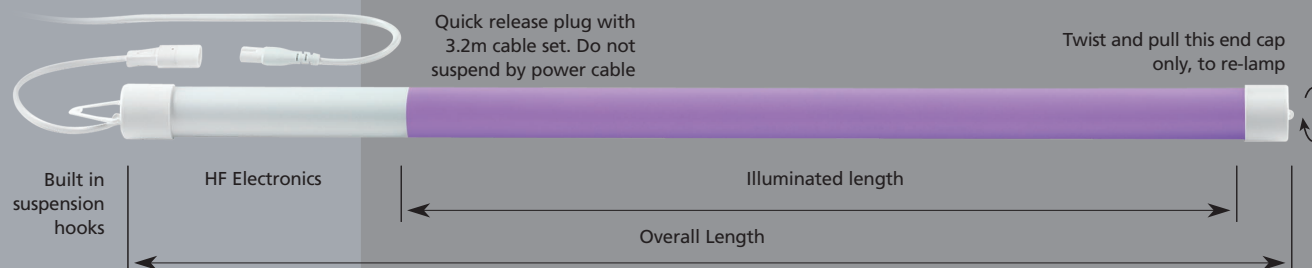

Please call 0044 (0) 1525 376974 for free advice.

Incorrect wiring or programming will invalidate all warranties.

T8 HFI Stick-Lite

Display lighting

TECHNICAL INFORMATION

For indoor applications only

LAMP

T8 triphosphor colour 840 as standard, lamp life 20,000 hours average, other colour temperatures available to order. Any way up mounting, quick release plug, 3.2m cable, lamp replacement possible if lamp is not broken.

FIXING

Suspension hooks and mounting clips included.

COLOURS

Colours available guaranteed fade free from our DDP range, Ice blue, sky blue, royal blue, purple, lavender, candy pink, pink, light red, red, light orange, orange, chrome green, leaf green, acid yellow and candlelight. Other filter colours available but not guaranteed fade free.

POWER CABLE

0.75mm 2 core flat PVC HO3VVH2-F 300/300v. C7 and C8 plugs with Euro CEE7/16 plug, or 3amp fused UK plug BS1363A. Internal wiring PFA 2 x 0.59mm 240v RMS BS3G210. The external cable

or cord of this luminaire cannot be replaced; if the cable or cord is damaged, the luminaire shall be destroyed. If the external flexible cable or cord is damaged, it shall be replaced by a special cord exclusively available from the manufacturer or his service agent.

VOLTAGE

220v-240v AC 50-60Hz, start up amps 0.98 operating amps 0.07 – 0.30 dependant on wattage.

TEMPERATURE

Note Lamps will run at reduced light output in colder temperatures and reduced lamp / ballast life at higher temperatures.

STANDARDS

Lamp holders EN60400. Outer casing RTI 125, UL94 glow wire test 850c IEC695-2-1. End caps UL V0. Class 2 product, EN55015 EN50082-1 EN61000-3-2. Covers EMC/LV requirements, CE WEEE and ROHS compliant. BS 4533: 102.1: 1990/ EN 60598-2-1: 1989 & BS EN 60598-1: 2008.





Optional Z stand and multi coloured Stick-Lites

Size: 300mm height, base 200 x 290mm

RE-LAMPING

Disconnect power supply prior to re-lamping. Remove end cap opposite the cable end by twisting and pulling. Pull off lamp holder, pull lamp directly out do not twist, use pliers if necessary. Replace new lamp of the same type and wattage only, check orientation of lamp holder and lamp pins and slide new lamp in, use light pressure and twisting motion to locate lamp pins in lamp holder. Fit lamp holder on to lamp pins and re-fit end cap so locators inside of end cap locate in holes in tubing.

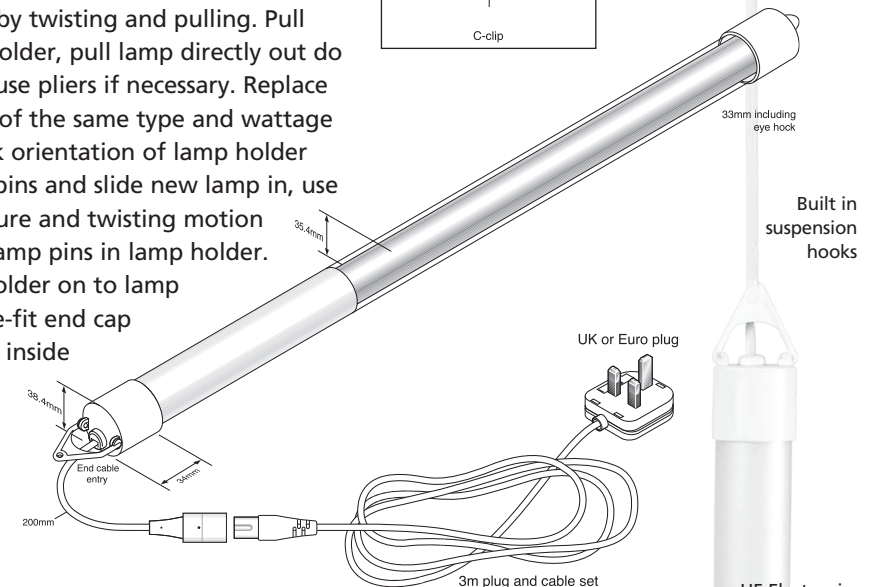

Product Code	Overall Length	Illuminated Length
HFI SL T8 18w	765mm	570mm
HFI SL T8 30w	1200mm	875mm
HFI SL T8 36w	1500mm	1180mm
HFI SL T8 58w	1800mm	1480mm
HFI SL T8 70w	2060mm	1744mm