










Dynapac SD2550CS

Large pavers



Technical data

 Masses	
Weight (incl. standard screed)	20 t
 Dimensions	
Basic width	2.55 m
Working width, max.	12 m
Working width, minimum (with reducing shoe)	2.05 m
Front ramp angle	13°
 Capacity	
Placement thickness (max)	360 mm
Theoretical placement capacity	1100 t/h
 Material hopper	
Capacity	7.0 m ³
Dumping height (center/outside)	525 mm /530 mm
Hopper width, internal	3292 mm
 Traction	
Maximum paving speed	28 m/min
Transport speed	4.0 km/h

 Engine	
Emissions according to	Stage IIIA/IV (Tier 3/4f)
Rated power, SAE J1995	194 kW (264 hp) @ 2200 rpm with infinitely variable ECO-mode
Electrical system	24 V
Fuel tank capacity	320 l
 Undercarriage	
Crawler length	3360 mm
Crawler width	320 mm
 Conveyor	
Conveyor type	Dual bar feeder
Conveyor control	Automatic with limit switches
Conveyor width	2x 655 mm
 Auger	
Auger diameter	500 mm
Auger control	Proportional speed control, Both sides driven independently

Find us locally at www.dynapac.com



We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

Dynapac SD2550CS

Large pavers



Technical data

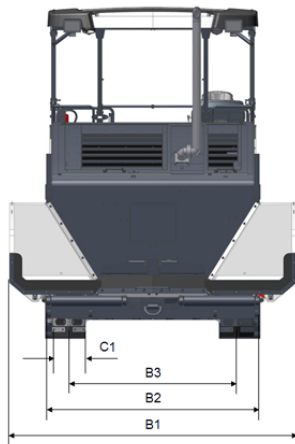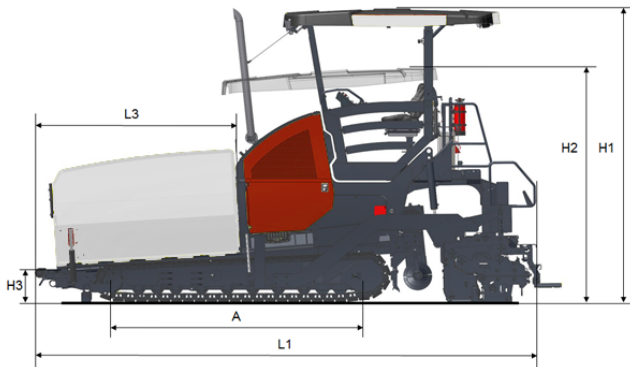

Dimensions	
A. Axle track	3360 mm
B1. Width, max.	3468 mm
B2. Width, standard	2550 mm
B3. Width, center of tracks	1992 mm
C1. Track width	320 mm
H1. Height, max.	3900 mm
H2. Height, transport	3100 mm
H3. Height	463 mm
L1. Length	6625 mm
L3. Length, hopper	2604 mm

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.