


PRODUCT DATA SHEET

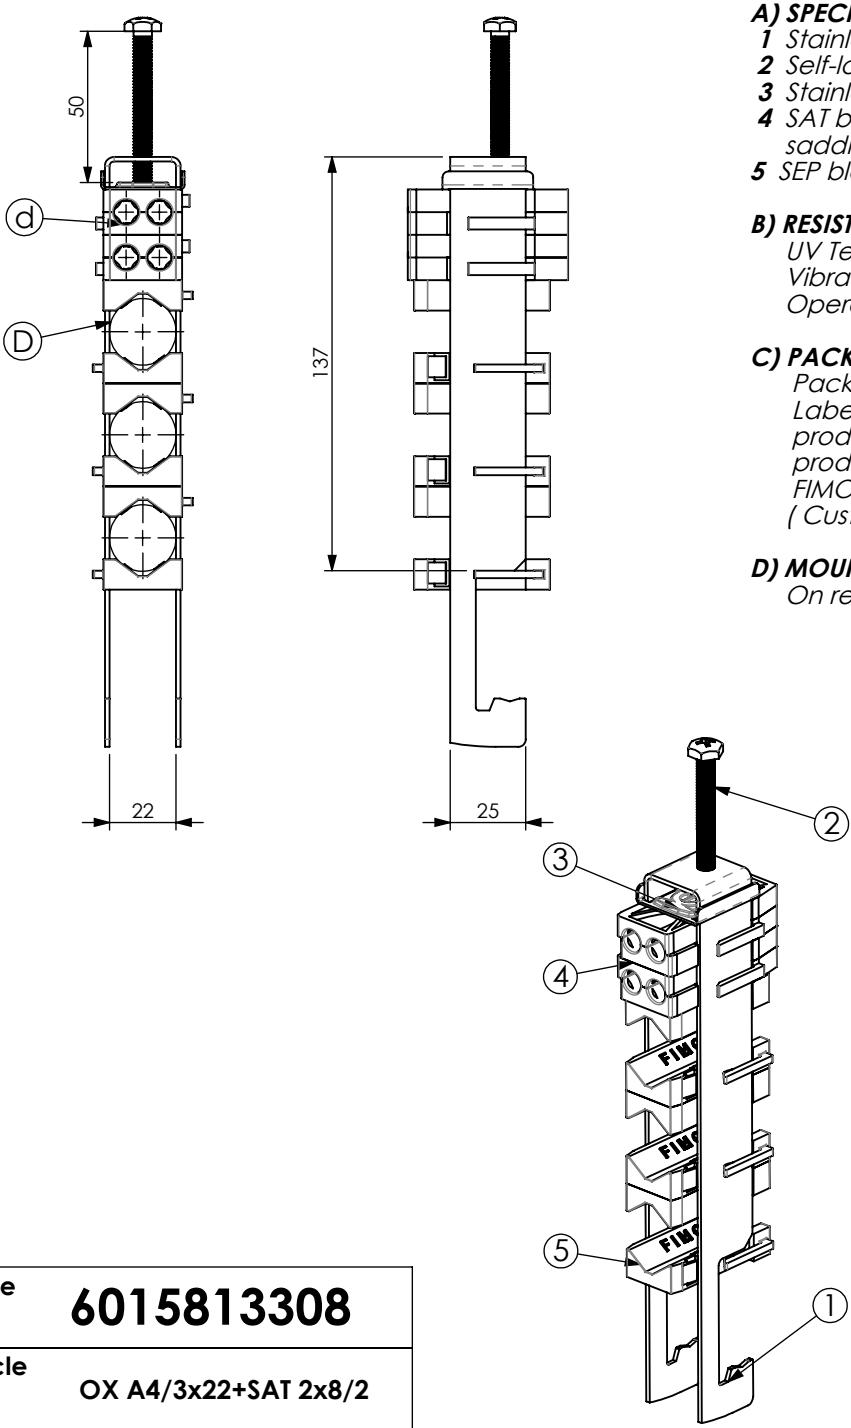

A) SPECIFICATIONS

- 1 Stainless steel bow type "A4"
- 2 Self-locking pressure screw M6,
- 3 Stainless steel sliding pressure plate.
- 4 SAT black P.A. fiberglass calibrated double saddles
- 5 SEP black P.A.fiberglass saddles

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -30°C +120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS


On request

code	6015813308
article	OX A4/3x22+SAT 2x8/2

	
50	0.18kg

RI	DATE	DR	DATE	AP	<i>Description:</i> <i>OX A4 Stainless cable clamp Complete with saddles for: 3 DC cables D=12-18mm 4 FO cables d=7-8±0.2mm. on angular 40x40mm</i>
02					
01					
00	26/02/21	G.S.	26/02/21	A.V.	
1 ST EMISSION					
 Setting Installation Standards					

PRODUCT DATA SHEET

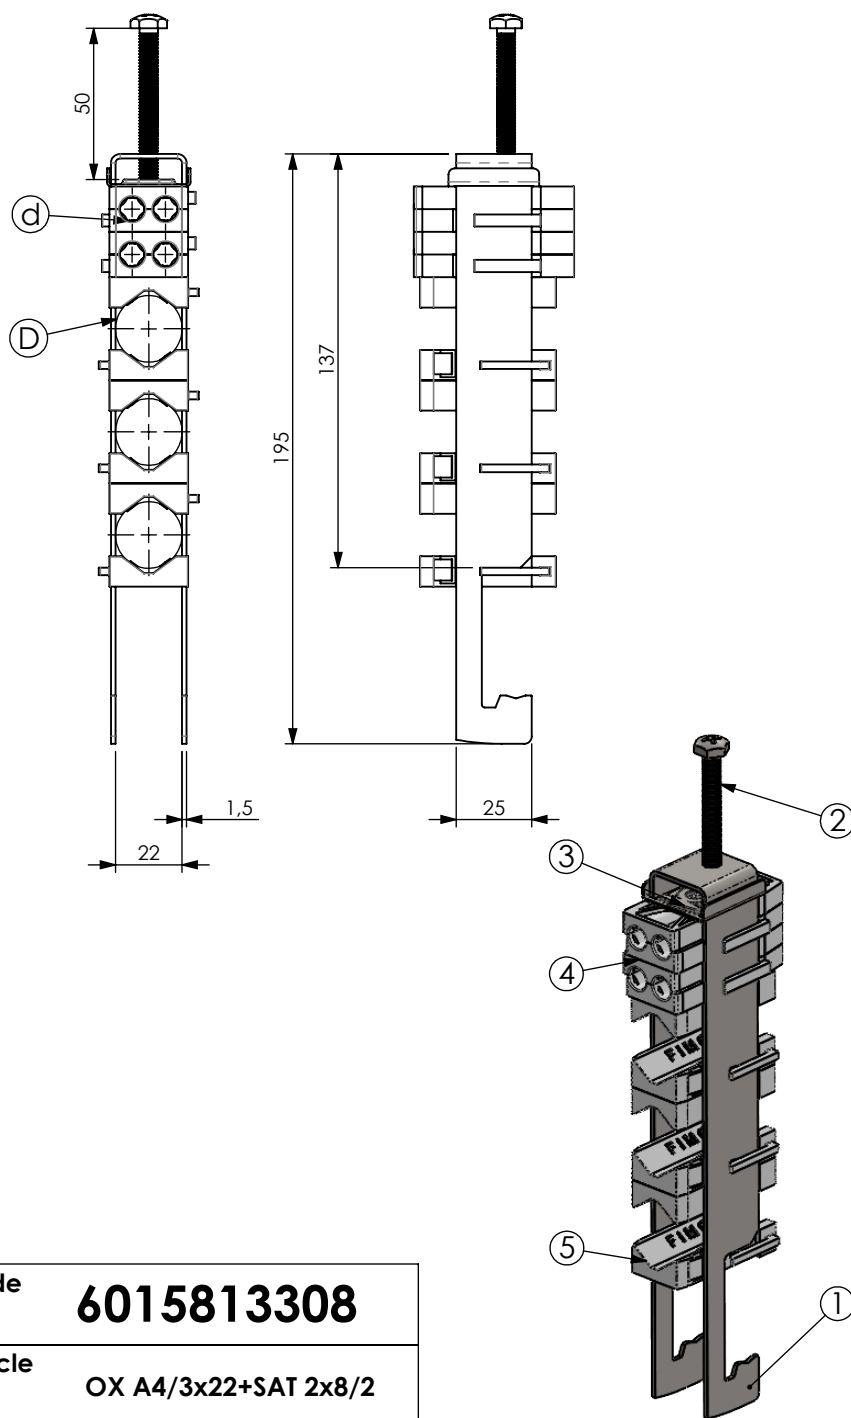

A) SPECIFICATIONS

- 1 Stainless steel bow
Hooking on 40x40mm angular.
- 2 Self-locking pressure screw M6.
- 3 Stainless steel sliding pressure plate.
- 4 SAT black P.A. fiberglass double saddles
- 5 SEP black P.A.fiberglass saddles

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -30°C +120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

on request

code	6015813308
article	OX A4/3x22+SAT 2x8/2

D	d		
12-22	7-8	50	0.18kg

RI	DATE	DR	DATE	AP	Description:
02					OX A4 Stainless cable clamp Complete with saddles for: 3 DC cables D=12-22mm, and 4 FO cables d=7-8mm.
01					
00	05/08/2013	E.B.	05/08/2013	A.V.	
1 ST EMISSION					
					Use: Fixing of: 3 DC cables D=12-22mm and 4 FO cables d=7-8mm on 40x40mm angular.