



# HUNTER TRIO SECURITY LIGHT

**Illuminate paths and driveways**



**240V  
AC**

**11W  
950LM**

**22W  
1900LM**

**TRI-COLOUR  
CCT**

**IP65  
FLOOD  
LIGHT**

**IP44  
SENSOR  
LIGHT**

**PIR  
SENSOR**

**CLASS 1 (1)**

**3YR  
WARRANTY**

**This security floodlight helps deter intruders and lights up your home exterior. The built-in sensor triggers the light to come on when movement is detected.**

- Adjustable sensor functions on time, light sensitivity (lux).
- Manual override available.
- Easily change colour temperature (CCT) from warm white 3000K, cool white 4200K to bright daylight 6000K.
- Latest in ultra-bright COB LED technology, with built-in 11W LEDs.
- Made from durable diecast aluminium.
- IP65 weather resistant for outdoor installation (Floodlights)
- IP44 weather resistant ratd (Sensor light).
- Quick and easy installation in 3 steps.
  1. Attach the base in to place
  2. Connect wiring to the quick connector on the base
  3. Slide the head on to the base and secure with the supplied nuts

## APPLICATIONS

- Security floodlight to light up driveways and paths.
- PIR Sensor detects movement to deter intruders or save energy by only illuminating when light is required.







# HUNTER TRIO SECURITY LIGHT

## TECHNICAL SPECIFICATIONS

<b>Operating voltage:</b>	240V / 50Hz
<b>Class:</b>	Class I (1)
<b>Wattage:</b>	Single: 11W Total, Twin: 22W Total
<b>Lumens:</b>	Single: 850lm (3000K); 950lm (4200K); 920lm (6000K) Twin: 1700lm (3000K); 1900lm (4200K); 1840lm (6000K)
<b>Light adjustable:</b>	Change colour temperature from 3000K, 4200K or 6000K
<b>Beam angle:</b>	60 degrees
<b>Colour rendering index:</b>	> 80
<b>Motion detection:</b>	Advanced PIR motion sensing
<b>Operation Modes:</b>	Auto - Override
<b>PIR range:</b>	10m x 180 degrees
<b>Light time on:</b>	10 sec to 6 min (Restarts when motion detected)
<b>Lux sensitivity:</b>	5 to 2000Lx
<b>Construction:</b>	Diecast Aluminum
<b>Ingress protection:</b>	IP65 rated (Floodlights), IP44 rated (Sensor light)
<b>Operating temperature:</b>	+5°C to 30°C
<b>Warranty:</b>	3 year replacement
<b>Standards:</b>	AS/NZS 60598.1 AS/NZS 60598.2.5 AS/NZS 60669.2.1

## INSTALLATION

Must be installed by a licensed electrician

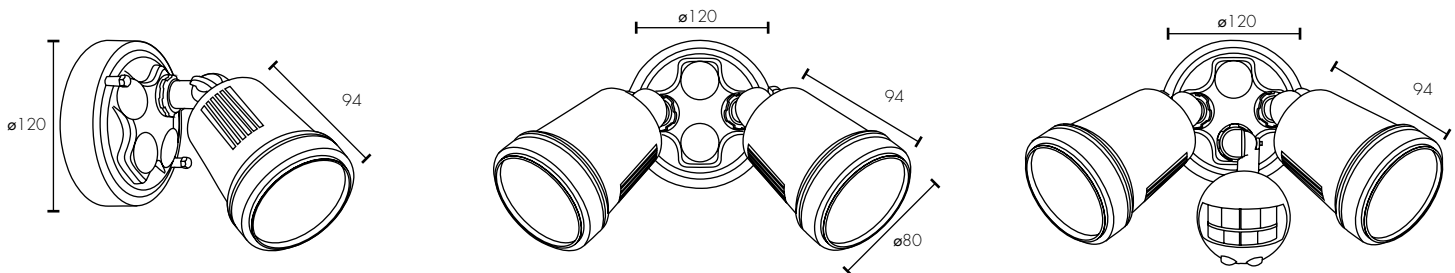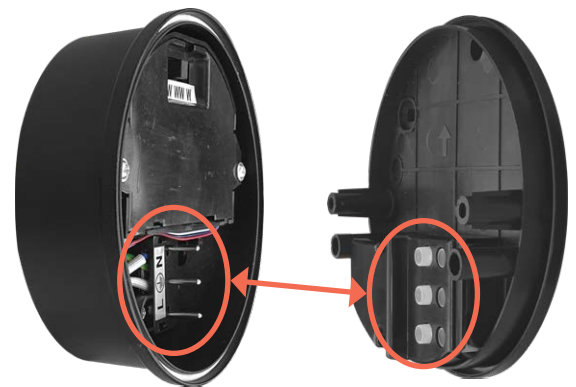

	MODEL	COLOUR	DESCRIPTION	BOX SIZE	GROSS WEIGHT	BOX QTY	BARCODE/TUN	
<b>RETAIL BOX</b>	20616	/05 White /06 Black	Hunter Trio Single Floodlight	W125 x H205 x D125 mm	0.56 kg	1 pc		
<b>OUTER CTN</b>	20616	/05 White /06 Black	Hunter Trio Single Floodlight		5.48 kg	8 pc		
<b>RETAIL BOX</b>	20622	/05 White /06 Black	Hunter Trio Twin Floodlight	165 x H205 x D125 mm	0.87 kg	1 pc		
<b>OUTER CTN</b>	20622	/05 White /06 Black	Hunter Trio Twin Floodlight		7.96 kg	8 pc		
<b>RETAIL BOX</b>	20625	/05 White /06 Black	Hunter Trio Twin Floodlight with Sensor	W165 x H205 x D155 mm	0.94 kg	1 pc		
<b>OUTER CTN</b>	20625	/05 White /06 Black	Hunter Trio Twin Floodlight with Sensor		8.52 kg	8 pc		