Nitron$_2$® | Cold Brew

BUNN



Nitro and Still Beverages - On Tap

bunn.com/nitron

nitroN2 COLD DRAFT

Nitron consistently dispenses cold brew, iced coffee, tea, juice and mocktails without sacrificing quality. Reclaim time and space from tedious preparation, brewing and storage practices. Available in 2-head and 4-head models to expand your beverage menu in a compact footprint.



Removable Graphic Door

Swapping the marketing panel on the front of the machine is a simple process with the Removable Graphic Door models. The front panel allows for easy removal and installation of graphics without tools, allowing your Nitron to promote your current menu.



Selectable Nitro Dispense

Need more than one Nitro tap? Nitron and Nitron-4X offer nitrogen infusion on one or two taps - allowing flexibility for high demand operations.




The Nitron Experience – No milk or sugar needed! The BUNN exclusive in-line nitro infuser produces up to 3 minutes* of cascading micro-bubbles, crowning your beverage with a stout-like head that tastes distinctively creamy and delivers a soft, velvety mouthfeel.



Proven Technology – Leveraging BUNN's consistent and reliable High Intensity® mixing chamber assures a perfectly blended finished beverage, cup-after-cup.

Keg Free

Achieve a nitro infusion with no kegs to change-out, store, clean or sanitize! Uses concentrate BIBs or BUNN refillable containers that staff are already familiar with. Each BIB yields multiple gallons of finished drinks.

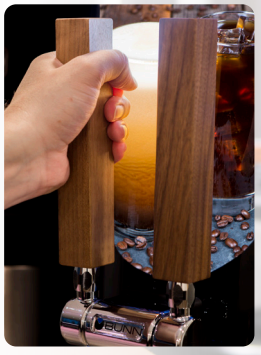

Customizable Styling

Have your own tap handles and graphics? The chrome-plated brass tap handles and the LED-lighted door graphics (on RGD models) can be swapped to reflect your unique brands and beverage offerings.

Universal Gas Compatibility - Nitron works with high-pressure tanks, nitrogen generators, and the new Nitron Gas Module. This compact, space-saving system can slide right under the dispenser and is compatible with all Nitron models, providing an unlimited supply of gas by filtering impurities from the surrounding air.

**Results based on product concentrate used*

MODELS

Dimensions:
Nitron : 10" W x 28.4" D x 34" H
(254mm W x 721.36mm D x 863.6mm H)

Nitron-4X : 15.8"W x 30.7"D x 34.4"H
(401.3mm W x 779.8mm D x 873.8mm H)

Burst Capacity:
At a rate of one 12oz drink per minute, dispenses 60 drinks before exceeding 41°F (75°F incoming water)

MATERIAL	Metal Housing and Stainless Steel
FLOW RATE	1.0oz - 1.5oz per second
VENTILATION	6" Back and top
MINIMUM WATER INLET PRESSURE	30 PSI
MAXIMUM WATER INLET PRESSURE	90 PSI
WATER SUPPLY CONNECTION	3/8" MFL
N2 GAS INPUT CONNECTION	1/4" Male Flare Bulkhead
MINIMUM N2 INLET PRESSURE	100 PSI
MAXIMUM N2 INLET PRESSURE	130 PSI
ICE BANK	8 lbs

ACCESSORIES



HIGH PRESSURE N2 REGULATOR
(required for use with tanks - US Only)
125 PSI Maximum Output
Product #: 54060.0000



NITRON GAS MODULE

Product #:	Description
55660.0005	120V NEMA Plug
55660.0002	220-240V UK Plug
55660.0003	220-240V EURO Plug
55660.0006	220-240V Kucas & KSA

Product #	Model	Disp. Heads	Door Type	Concentrate Ratio	Connector	Volts	Amps	Watts	Hertz	Phase	Plug	Cord Attached	Agency
US Market													
51600.0009	Nitro/Still	2	All Black	4:1 - 12:1	Scholle	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF ETL
51600.0011	All-Nitro	2	All Black	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF ETL
51600.0016	Nitro/Still	2	All Black	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF ETL
51600.0018	Nitro/Still	2	Removable Graphic	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF ETL
51600.0020	Nitro/Still	2	Removable Graphic	4:1 - 12:1	Scholle	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF ETL
51600.0022	All-Nitro	2	Removable Graphic	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF ETL
51600.0028	Nitro/Still w/ Gas Module	2	Removable Graphic	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF ETL
51600.0029	Nitro/Still w/ Gas Module	2	Removable Graphic	4:1 - 12:1	Scholle	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF ETL
51600.0030	All-Nitro w/ Gas Module	2	Removable Graphic	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF ETL
51600.0042	Nitro/Still	2	All Black	4:1 - 12:1	Scholle	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF ETL
62400.0000	2 Nitro/2 Still w/ Gas Module	4	No Graphics	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF ETL
62400.0001	2 Nitro/2 Still w/ Gas Module	4	Coffee Graphic	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF ETL
62400.0002	2 Nitro/2 Still w/ Gas Module	4	Cold Beverage Graphic	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF ETL
Europe, Middle East and Africa (EMEA)													
51600.0024	Nitro/Still	2	All Black	4:1 - 12:1	Ball Valve	220-240	2.25-2.75	410-520	50/60	1	EURO 16A	Yes	CE
51600.0049	Nitro/Still	2	All Black	4:1 - 12:1	Ball Valve	220-240	2.25-2.75	410-520	50/60	1	UK 13A	Yes	ECAS
Asia													
51600.0034	All-Nitro	2	All Black	4:1 - 12:1	Ball Valve	220-240	2.25-2.75	410-520	50/60	1	N/A	Yes	CE
51600.0059	Nitro/Still	2	Removable Graphic	4:1 - 12:1	Ball Valve	220-240	2.25-2.75	410-520	50/60	1	KOREA 16A	Yes	CE KC
51600.0060	Nitro/Still	2	Removable Graphic	4:1 - 12:1	Ball Valve	230	2.25-2.75	410-520	50/60	1	KOREA 16A	Yes	KC

5020 Ash Grove Drive, Springfield, IL 62711 USA
(800) 637-8606 | +1 (217) 529-6601 | www.bunn.com

4/26 © 2025 Bunn-O-Matic Corporation