NITRON-4X, 120V NO GRPH W/NGM

Height: 35.9" (91.2cm) Width: 15.8" (40.1cm) Depth: 29.8" (75.7cm)

- At a rate of one 16oz drink per minute, can dispense 65 drinks before exceeding 41°F (using 75°F incoming water)
- 11" x 11" graphic panel on the LED-lighted door can easily be changed - without tools- to promote unique brands or beverage offerings
- Includes Gas Module specifically designed for Nitron Cold Draft dispensers, eliminating the need for other external gas sources
- Selectable nitrogen on up to 2 beverages using concentrates or refillable containers
- Patented High Intensity® mixing chamber assures a perfectly blended finished beverage, from cup to cup
- Patented BUNN gas infusion technology can produce up to 3 minutes of cascading micro-bubbles
- Automatic water bath fill maintains water bath level for optimal cold beverage capacity
- Refrigerated product cabinet protects flavor integrity and product life
- Service-friendly design makes set-up and maintenance simple
- Mounted on standard 3/8"-16 UNC threads, chrome plated brass tap handles are interchangeable with custom handles for a more personalized look
- Large dispense area accommodates taller cups and carafes up to 8.76"

Agency:

Intertek NSF

Specifications

Product #: 62400.0002

Flavors: 4 Flavors

Finish: Stainless/Black

Refrigerant: R-290

Ice Bank: 8.00 lbs (3.629 kgs)

Dispense: Pull & Hold

Handle: Stainless Steel

Legs: 4" Black Legs

Additional Features

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H²O Temp.	Phase	# Wires plus Ground	Hertz
120	6	-	Yes	NEMA 5-15P	-	60°F (15.5°C)	1	2	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
30-90	207-621	3/8" Male Flare Fitting	-

⚠ **WARNING:**

CAD Drawings

2D	Revit	KLC
●		

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 07/21/2026

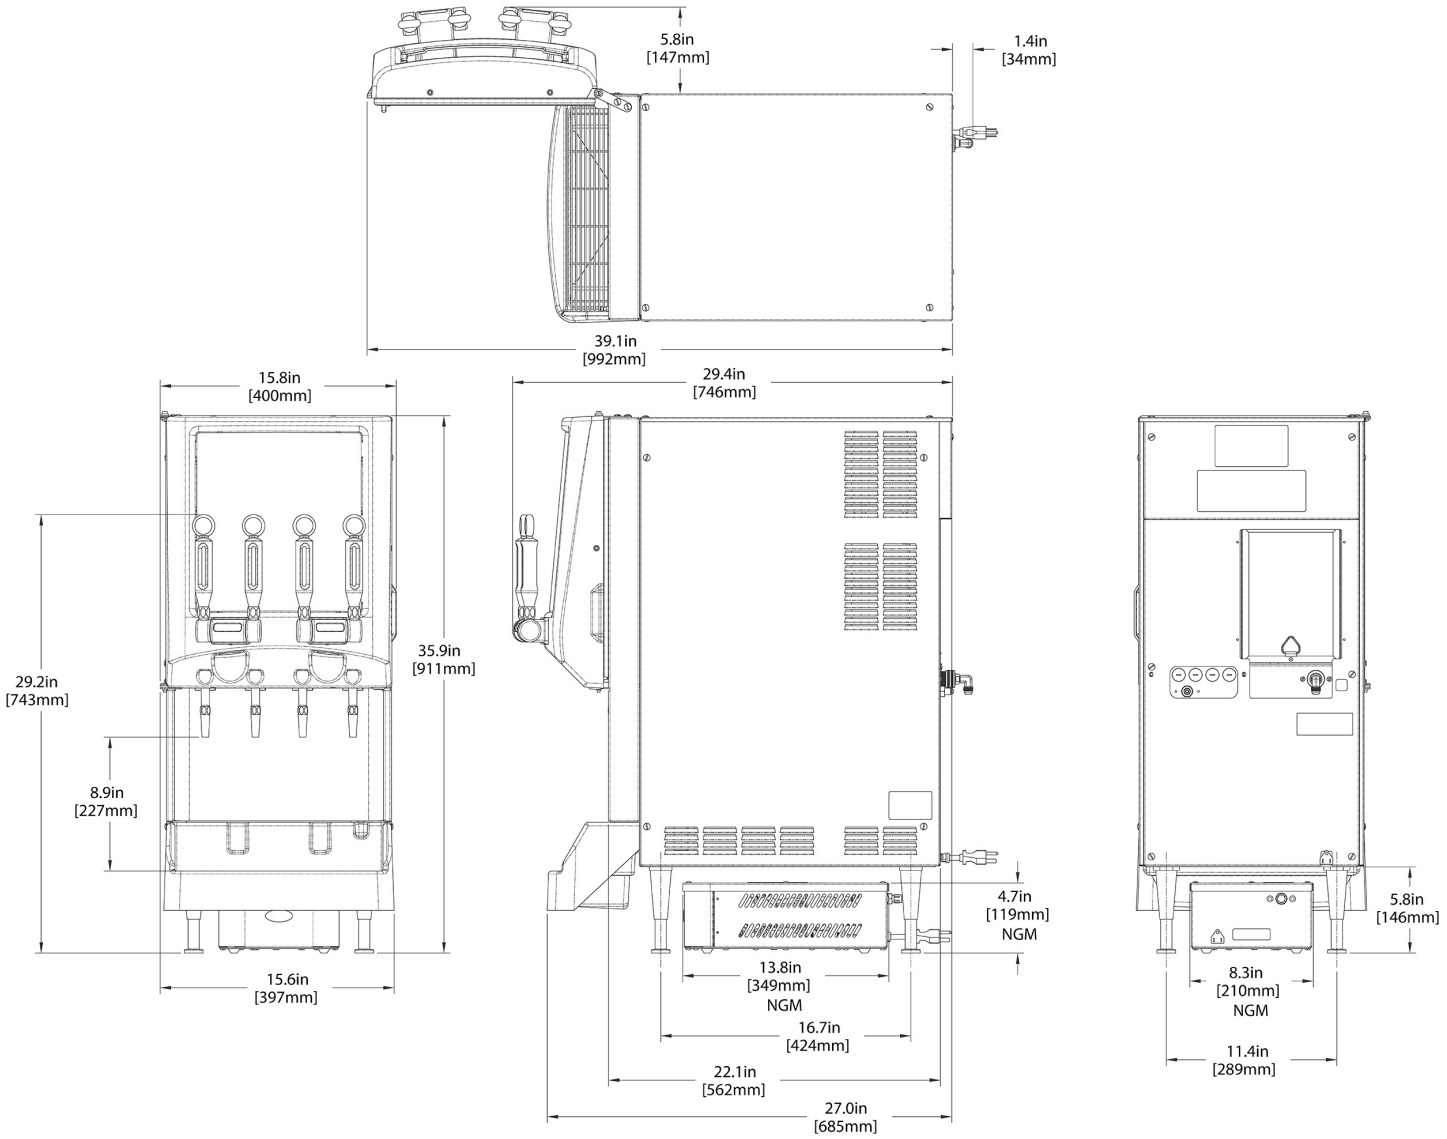

	Unit			Shipping				
	Height	**Width**	**Depth**	**Height**	**Width**	**Depth**	**Weight**	**Volume**
English	35.9 in.	15.8 in.	29.8 in.	35.9 in.	15.8 in.	29.8 in.	208.000 lbs	9.651 ft³
Metric	91.2 cm	40.1 cm	75.7 cm	91.2 cm	40.1 cm	75.8 cm	94.349 kgs	0.273 m³

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 07/21/2026

Related Products & Accessories: NITRON-4X, 120V NO GRPH W/NGM(62400.0002)

SANITIZER,KAY-5 (BOX-50 PKTS)

Product #: 24634.0001

CONTAINER ASSY, REFILLABLE

Product #: 39302.0000[2]

KIT, PRIMARY N2 REGULATOR

Product #: 54060.0000[2]

NGM, 220-240V 50-60HZ ME

Product #: 55660.0006[1]

SYSTEM, WEQ-10(1.5)5

Product #: 56000.0027[1]

SYSTEM, WEQ-18(2).2C

Product #: 56000.0036[1]

CARTRIDGE, WEQ-10 (1.5)5

Product #: 56000.0122[1]

CARTRIDGE, WEQ-18 (2).2C

Product #: 56000.0128[1]

[1]NSF Certified [2]NSF Certified with spec sheet model listed [3]NSF Certified under Solventum Purification [4]NSF Certified under Vivreau Ltd [5]NSF Certified under Zojirushi [6]NSF Certified under Qins Inc [7]NSF COMPONENT Certified

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 07/21/2026

Serving & Holding Options: NITRON-4X, 120V NO GRPH W/NGM(62400.0002)

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.

[1]NSF Certified [2]NSF Certified with spec sheet model listed [3]NSF Certified under Solventum Purification [4]NSF Certified under Vivreau Ltd [5]NSF Certified under Zojirushi [6]NSF Certified under Qins Inc [7]NSF COMPONENT Certified

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 07/21/2026

WELBILT®

an Ali Group Company