JDF®-4S, 120V LIT 4 SEG PH W/WATER

Height: 33.4" (84.8cm) Width: 15.7" (39.9cm) Depth: 27.5" (69.9cm)



- Patented High Intensity Mixing chamber assures a perfectly blended finished beverage, cup-after-cup
- Four Segment Graphic Door makes graphics changes easy. Includes variety- pack of eight displays: Apple Juice; Cranberry Juice; Grape Juice; Lemonade; Orange Juice; Pineapple Juice; Prune Juice; Iced Tea
- LED lighted door graphics bring high visibility to front-of-house applications
- Flexibility to seamlessly process both ambient and thawed frozen concentrates
- Both push and hold dispense and optional single size portion control dispense available in the same dispenser
- 7" (17.8cm) cup clearance accommodates most juice containers
- Quick dispense with 1.0 to 1.5oz (29.6 to 44.4ml) per second flow rate
- With Cold Water dispense feature
- Door lock standard
- ADA compatible dispense switch kit model available for self-serve locations
- Service friendly design makes set up and maintenance simple
- Burst Capacity: At rate of three 12 oz drink/min, 145 drinks before exceeding 41°F (75°F ambient and 75°F incoming water temp)

Agency:

Intertek NSF

Specifications

Product #: 37300.0094

Flavors: 4 Flavors

Door: Lit

Refrigerant: R134A

Ice Bank: 18.00 lbs (8.165 kgs)

Dispense: Push Button

Legs: 4" Black Legs

Water Access: Plumbed

Additional Features

Cold Water Button

Air Filter Included

See Spec Sheet for Capacities

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H²O Temp.	Phase	# Wires plus Ground	Hertz
120	6	720	Yes	NEMA 5-15P	-	60°F (15.5°C)	1	2	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-100	138-689	3/8" Male Flare Fitting	-

CAD Drawings


2D	Revit	KLC
●	●	●

⚠ **WARNING:** This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

For most current specifications and other info visit bunn.com.

Last Updated: 11/13/2026

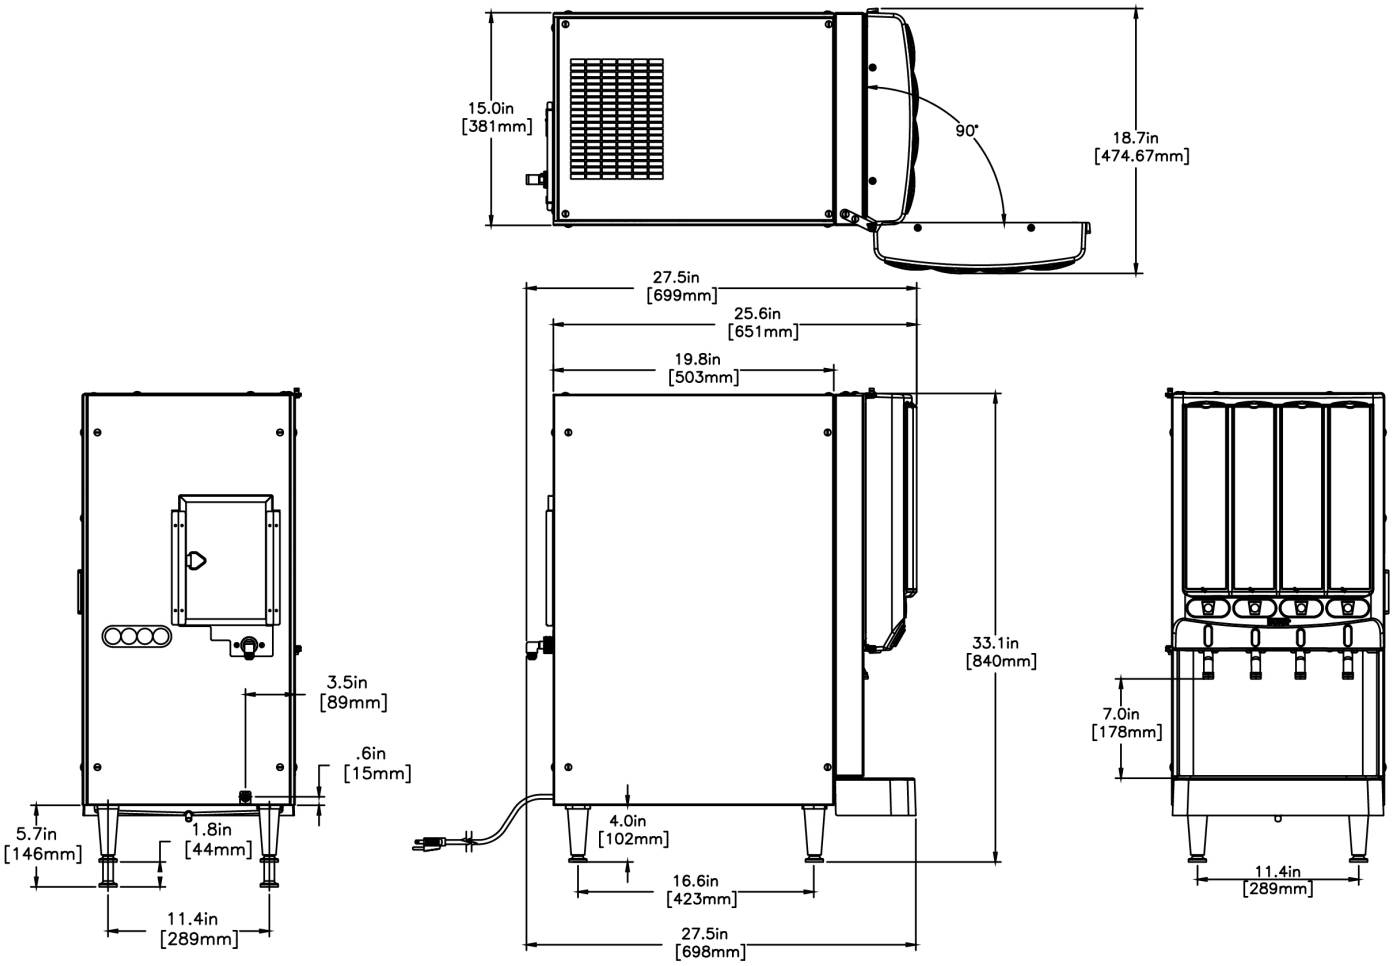


	Unit			Shipping				
	Height	**Width**	**Depth**	**Height**	**Width**	**Depth**	**Weight**	**Volume**
English	33.4 in.	15.7 in.	27.5 in.	43.7 in.	22.8 in.	30.5 in.	143.000 lbs	17.586 ft³
Metric	84.8 cm	39.9 cm	69.9 cm	111.0 cm	57.9 cm	77.5 cm	64.865 kgs	0.498 m³

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 11/13/2026

Related Products & Accessories: JDF®-4S, 120V LIT 4 SEG PH W/WATER(37300.0094)

KIT, AMBIENT CONC CVRSN JDF-4 Product #: 33699.0001[2]	 CONTAINER ASSY, REFILLABLE Product #: 39302.0000[2]	 WIRE GRILL, DRIP TRAY (JDF-4S) Product #: 39613.0000	KIT, HOSE ASSY-PUMP JDF-2S/4S Product #: 39690.0000[2]	 TRAY, EXTENDED DRIP JDF-4S Product #: 40789.1000

[1]NSF Certified [2]NSF Certified with spec sheet model listed [3]NSF Certified under Solventum Purification [4]NSF Certified under Vivreau Ltd [5]NSF Certified under Zojirushi [6]NSF Certified under Qins Inc [7]NSF COMPONENT Certified

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 11/13/2026

Serving & Holding Options: JDF®-4S, 120V LIT 4 SEG PH W/WATER(37300.0094)

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.

[1]NSF Certified [2]NSF Certified with spec sheet model listed [3]NSF Certified under Solventum Purification [4]NSF Certified under Vivreau Ltd [5]NSF Certified under Zojirushi [6]NSF Certified under Qins Inc [7]NSF COMPONENT Certified

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
For most current specifications and other info visit bunn.com.

Last Updated: 11/13/2026


WELBILT
an Ali Group Company