

ROBINET DE CUVE DE LAVAGE

LAUNDRY TUB FAUCET

CARACTÉRISTIQUES SPECIFICATIONS

INSTALLATION À 3 TROUS
4" (10,2 CM) CENTRE

DÉBIT DE 6 GPM (22,7 LPM) MAXIMUM

CARTOUCHE EN CÉRAMIQUE GARANTIE À VIE

CORPS EN LAITON MASSIF

BEC FILETÉ ¾" (1,9 CM)

3-HOLE INSTALLATION
4" (10.2 CM) CENTRE

MAXIMUM FLOW RATE OF 6 GPM (22.7 LPM)

CERAMIC CARTRIDGE WITH LIFETIME WARRANTY

SOLID BRASS BODY

¾" (1.9 CM) THREADED SPOUT



FICHE TECHNIQUE DATA SHEET

TASSILI®

TASSILI.CA

ORFEO
33003651

FINI CHROME
CHROME FINISH





ROBINET DE CUVE DE LAVAGE

LAUNDRY TUB FAUCET

DESSINS TECHNIQUES

TECHNICAL DRAWINGS

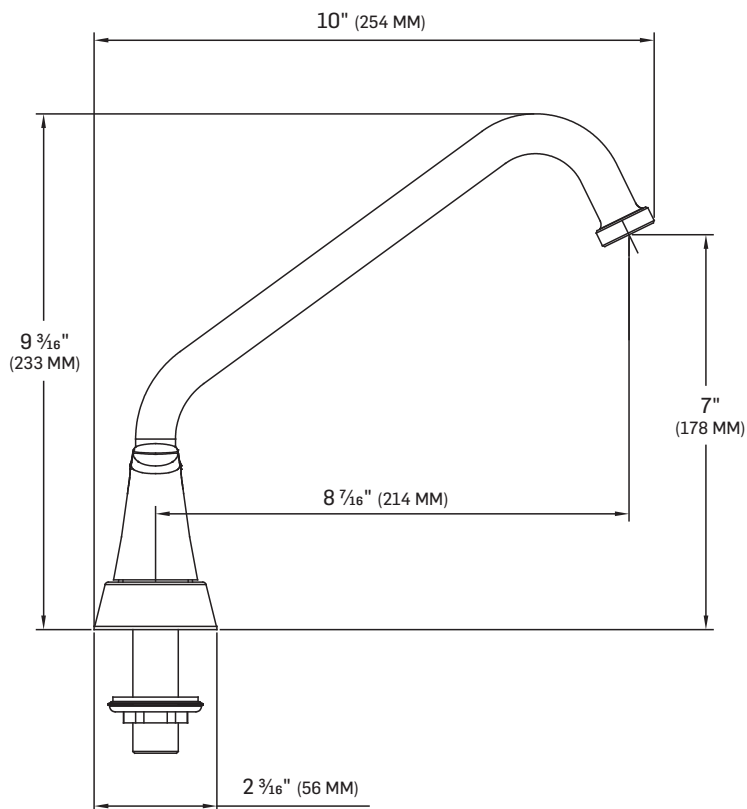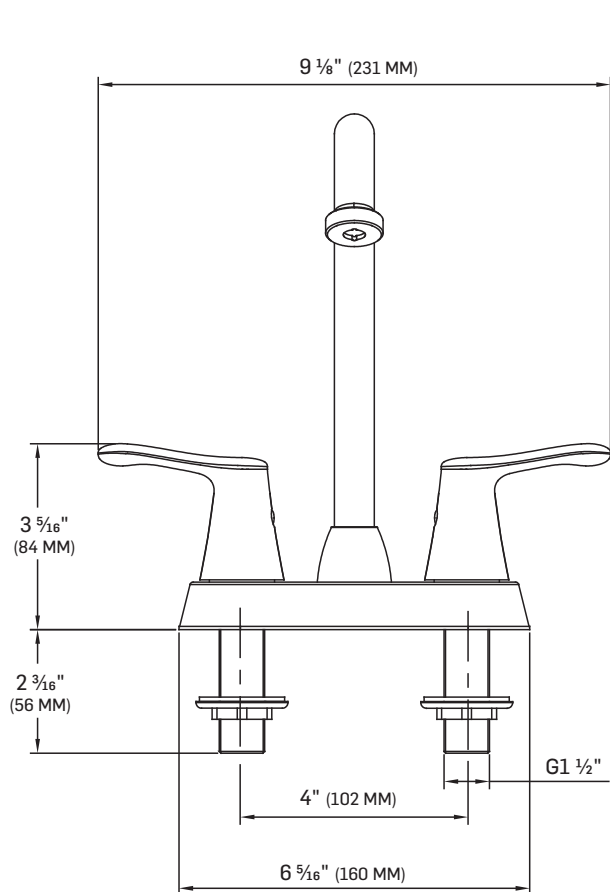

TOUTES CES DIMENSIONS SONT À TITRE INDICATIF. AFIN D'ASSURER UNE INSTALLATION PARFAITE, LES DIMENSIONS DE LA STRUCTURE DOIVENT ÊTRE VÉRIFIÉES À PARTIR DE L'UNITÉ AVANT L'INSTALLATION.

ALL THESE DIMENSIONS ARE FOR INDICATIVE PURPOSES. TO ENSURE PROPER INSTALLATION, VERIFY THE PRODUCT DIMENSIONS BEFORE THE INSTALLATION.

ORFEO
33003651

FINI CHROME
CHROME FINISH
2504



TASSILI®