

AlinO-Linear Shower Tray

Waterproof bonded pre-sloped Linear Shower Tray

AlinO Linear Shower Trays:

36" x 60" Linear Shower Tray for Wall Drain
48" x 60" Linear Shower Tray for Wall Drain
60" x 60" Linear Shower Tray for Wall Drain
60" x 32" Linear Tray for Wall Drain

36" x 60" Linear Shower Tray for Center Drain
48" x 60" Linear Shower Tray for Center Drain
60" x 60" Linear Shower Tray for Center Drain

36" x 87.5" Linear Shower Tray for Off-Center Drain

LINEAR SHOWER KIT

Components include



A Sloped Tray
(1 set)



B Inside Corners
(2 pcs.)



C Pipe Seal
(2 pcs.)



D Waterproof Band
(5'x 12.5 m / 41 ft)



E Waterproof Membrane
(10 msqm / 108 sqft)



F Drain and grate
(1 set)

AlinO™

Ph: 416 92 ALINO (25466)
email: info@alino.com
www.alino.com

AlinO™

LINEAR DRAIN

TWO IN ONE STAINLESS STEEL GRATE AND TILE INSERT



INSTALLATION MANUAL

Step 1

Things need to consider before starting your project

Materials required:

- Modified thin set mortar
- ABS / PVC pipe (small pc.)
- ABS / PVC Glue Masking tape

Tools Required:

- 5 gallons bucket
- Mixing paddle and Power drill Jigsaw Utility Knife (or scissors)
- ¼"x3/16" (6mm x 5mm) V-notched trowel and ¼"x¼" (6mm x 6mm) U-notched trowel
- Proper trowel to set the tiles level
- Please ensure the floor and work area are clean, and debris or filth cannot get into the shower drain during assembly. Please cover drain using the masking tape or cloth
- A small piece of 2" pipe may be required to fill up the gap between the AlinO Linear drain and drain pipe




Step 1 A

AlinO Linear Drain Installation:

Wall drain application:

Center of drain hole should be 2-1 / 4" from expected finished wall surface.

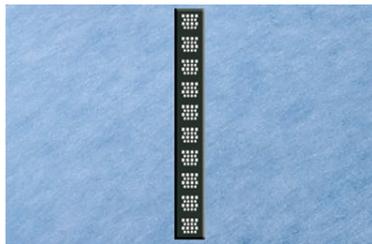

Step 1 B

Center drain application:

Measure distance from each wall to determine drain location. Cut Tray to fit or add AlinO Linear Extensions kit, if required.

Step 1C



Off-Center drain application: Measure distance from the wall to the center of the drain, and deduct 2.5" for drain body support and cut Off-Set Tray (27.5" x 36").

Step 2



Once location for drain is identified, cut a 3-1/4" to 3.75" hole in the substrate, **Skip step 4, if you are not using AlinO Linear Tray.** **Skip steps 3 & 5, if you are not using AlinO-Gard waterproof membrane.**

Step 3



Waterproof AlinO Gard on walls:

Install AlinO-Gard waterproof membrane on the wall with modified thin set mortar and ensure 2" overlap at every joint. Use ¼" x 3/16" (6mm x 5mm) V notched trowel.

Step 4



AlinO Linear Tray installation:

Use modified thin set mortar on the substrate surface and back of the AlinO Linear Tray (flat side) to ensure 100% coverage. Note: Top sloped surface is already pre-bonded with AlinO-Gard waterproof membrane and ready for tile. Peel-off the top layer of double sided tape from the fold before final installation (if applicable). Use ¼" x ¼" (6mm x 6mm) U notched trowel.

Step 5



Install all pre-formed inside and outside AlinO-Corners on all corners of the Tray. Cut AlinO Band to length. Fold in half lengthwise to create crease for easy install. Apply modified thin set mortar and press in place using a flat trowel for every horizontal and vertical joints. Use ¼" x 3/16" (6mm x 5mm) V notched trowel.

Step 6



Join AlinO Linear Drain with 2" No Hub Coupler. Measure the distance between drain and the pipe, cut a small piece of 2" pipe to join (if required) by using ABS/PVC solvent. Apply modified thin set mortar on the substrate, and position drain body support and then drain body.

Step 7



Two-in-One AlinO Linear Drain Grate installation: Stainless Steel Grate and Tile Insert

Use Height adjustable knobs (bottom of the grate holder) to adjust grate height to Flush or 1mm below the finished tiled shower floor surface. Position hair catcher on the drain hole.

Step 8



Ensure all plastic clips are attached with the bottom of the grate.

Step 9A



Stainless Steel Grate

Placed stainless steel grate on grate holder.

Step 9B



Tile Insert

Reverse the grate and ensure all clips are switched to bottom side of the grate. Cut a piece of tile to fit into grate and install tile by using thin set mortar, and place into to the Grate holder.

PRODUCT FEATURES:

AlinO-Linear Drain

- 'Two-in-One' Stainless Steel Grate & Tile insert.
- 2" drain outlet.
- Height adjustable tray.
- Waterproof membrane bonded on the drain flange.
- Width : 2.75", Length: 24", 30", 42" & 54"
- Finishes : Nickel / Chrome / Black