



Slim and compact LED Floodlight

YourHome SylFlood



The SylFlood range of LED Floodlights feature a stylish and slim body, made of durable and lightweight die-cast aluminium. SylFlood can be used to provide additional safety and security lighting for home exterior areas, such as gardens, pathways, driveways and garages.

The Floodlights includes a 1m pre-wired power cable and fitting bracket for quick and easy installation. The universal mounting bracket allows for wall and surface mounting with the possibility of vertical tilting.

The range includes models that also feature a passive infrared sensor (PIR), which is tiltable for better adjustment of detection areas.

Available in a wide range of lumen packages from 950 lumens up to 10,000 lumens, warm white (3000K) and cool white (4000K) colour temperature, and a black or white metal casing.

Features

- Slim LED exterior floodlight with/without PIR
- Lightweight, durable, die-cast aluminium body
- Universal mounting bracket allows wall or surface mounting with the possibility of tilting upwards or downwards
- Possibility to tilt the sensor
- Quick and easy to install with 1m pre-wired stripped cable and fitting bracket
- Higher wattages up to 73W - 137 lm/W efficacy
- Available in 3000K or 4000K
- CRI >80
- IP65 rated, sensor version IP54
- 9-45W: IK06, 63-73W: IK07 impact proof, sensor: IK05
- Operating temperature range: -20 to +40°C
- Lifespan: 90,000 hrs (L70/B50)
- 3 year warranty
- Sensor: adjustable lux (2 to 2000 lux) and time levels (10 secs to 5 min)

Product information

Code	Description	System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	IP Rating	IK Rating	Colour Temperature Name	Colour Temperature (K)	Weight (kg)
SylFlood									
0047101	SylFlood IP65 1000LM 840 Black	9	1000	111	IP65	IK06	Cool White	4000	0.32
0047102	SylFlood IP65 1850LM 830 Black	18	1850	103	IP65	IK06	Warm White	3000	0.39
0047103	SylFlood IP65 2000LM 840 Black	18	2000	111	IP65	IK06	Cool White	4000	0.39
0047105	SylFlood IP65 3000LM 840 Black	27	3000	111	IP65	IK06	Cool White	4000	0.51
0047107	SylFlood IP65 3000LM 840 White	27	3000	111	IP65	IK06	Cool White	4000	0.51
0047108	SylFlood IP65 4650LM 830 Black	45	4650	103	IP65	IK06	Warm White	3000	0.74
0047109	SylFlood IP65 5000LM 840 Black	45	5000	111	IP65	IK06	Cool White	4000	0.74
0047111	SylFlood IP65 7000LM 840 Black	63	7000	111	IP65	IK07	Cool White	4000	1.19
0047113	SylFlood IP65 10000LM 840 Black	73	10000	137	IP65	IK07	Cool White	4000	1.19
SylFlood PIR									
0047114	SylFlood IP54 PIR 950LM 830 Black	10	950	95	IP54	IK05	Warm White	3000	0.475
0047115	SylFlood IP54 PIR 1000LM 840 Black	10	1000	100	IP54	IK05	Cool White	4000	0.475
0047117	SylFlood IP54 PIR 1000LM 840 White	10	1000	100	IP54	IK05	Cool White	4000	0.475
0047118	SylFlood IP54 PIR 1850LM 830 Black	19	1850	97	IP54	IK05	Warm White	3000	0.475
0047119	SylFlood IP54 PIR 2000LM 840 Black	19	2000	105	IP54	IK05	Cool White	4000	0.475
0047120	SylFlood IP54 PIR 1850LM 830 White	19	1850	97	IP54	IK05	Warm White	3000	0.475
0047121	SylFlood IP54 PIR 2000LM 840 White	19	2000	105	IP54	IK05	Cool White	4000	0.475
0047122	SylFlood IP54 PIR 2850LM 830 Black	28	2850	102	IP54	IK05	Warm White	3000	0.575
0047123	SylFlood IP54 PIR 3000LM 840 Black	28	3000	107	IP54	IK05	Cool White	4000	0.575
0047124	SylFlood IP54 PIR 4650LM 830 Black	46	4650	101	IP54	IK05	Warm White	3000	0.8
0047125	SylFlood IP54 PIR 5000LM 840 Black	46	5000	109	IP54	IK05	Cool White	4000	0.8


SylFlood



Additional Images




Photometric Data



YourHome SylFlood.
All codes, both casing colours



Dimensions (mm)

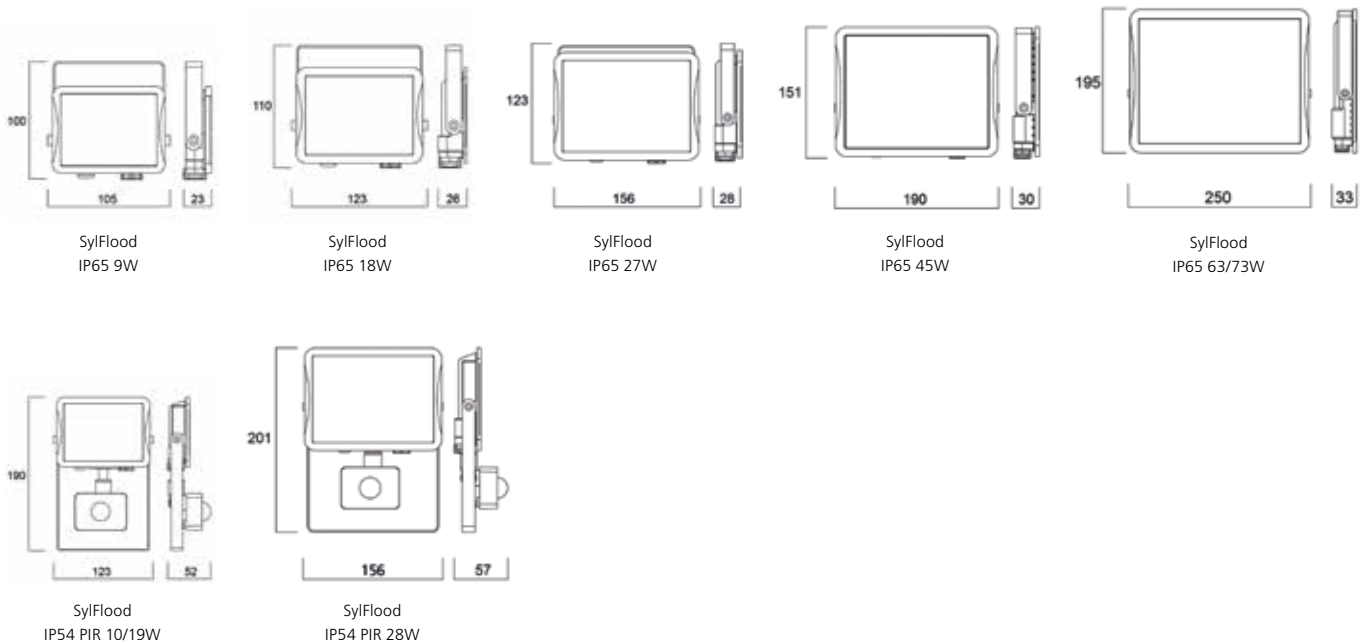

SYLVANIA



CE UK
CA



Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania International Group.

Copyright Feilo Sylvania International Group. May 2021

sylvania-lighting.com

A Feilo Sylvania Company