

PRICE COMPUTING SCALE
WITH PRINTER


PI-150 model

scales with
printer

03



Dimensions

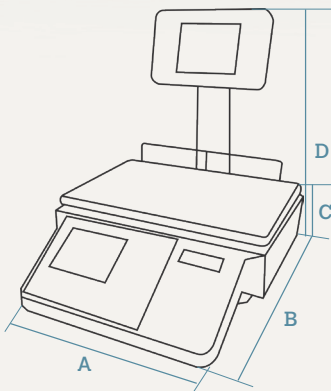

DATA IN mm

A	375
B	444
C	134
D	414

Plate dimensions: L375 x W236 mm.

Packaging measures:
L460 x W490 x H270 mm.

Weight with packaging: 7.6 kg.



Cely PI
SERIES



1 RECEIPT
PRINTER



LCD
SEGMENT
DISPLAY




UP TO
100 PLUS



UP TO
2 VENDORS



RS-232



RECHARGEABLE
INTERNAL
BATTERY



METROLOGICAL
VERIFICATION
OPTIONAL (EU)

Characteristics and functionality

Main characteristics

- Price computing electronic scale with receipt printer.
- Valid for legal metrology.

Features

- 100 PLUs in memory - 12 direct PLUs.
- Information for each PLU: name of 9 characters, weighed or unitary, price, pretare, VAT.
- 2 vendors.
- Sales reports: total sales by article or by VAT.
- Fix tare.
- Manual zero
- Change calculation.
- Energy saving via programmable on and off back lighting switching.

Capacity / Accuracy

- Mono-range (3,000 divisions):
 - 15 kg / 5 g.
- Multi-range (3,000 divisions):
 - 6 kg / 2 g - 15 kg / 5 g
 - 15 kg / 5 g - 30 kg / 10 g.

Available formats

- Flat and pole in the same scale: the tower is included in the packaging and is easily installable.

Construction

- Structure: ABS plastic casing.
- Keypads of 33 keys.
- Stainless steel plate with rod.

Displays

- Backlit LCD segment display (W78 x H150 mm) for vendor and buyer.
- 3 lines with 6 digits of H18 mm + 1 alphanumeric line:
 - Showing weight, price / kg, total, tare, vendor and name of article.

Printer

- 57 mm thermal printer for receipts.
- Easy-loading system.

Receipts

- Up to 30 lines.
- 3 programmable header lines and 3 lines at the end of the receipt.

Communications

- RS-232.

Security

- Access to different protected programming menus via configurable passwords.

Connectivity with other devices

- PC.
- Cash drawer (6 V).

Power supply

- Mains: AC 12 V / 2,500 mA adapter.
- Rechargeable internal battery: Pb 6 V / 4 Ah.
 - To prevent data loss in case of power failure in the network.



Models

Flat/Pole format

	Displays	Printer	PLUs	Direct PLUs	Vendors	Power	Capacity / Accuracy	Reference
PI-150 F/P - 15	LCD Segment	Receipts	100	12	2	Mains / battery	15 kg / 5 g	71AI150S000N__
PI-150 F/P - 6/15	LCD Segment	Receipts	100	12	2	Mains / battery	6 kg / 2 g - 15 kg / 5 g	71AI150S000E__
PI-150 F/P - 15/30	LCD Segment	Receipts	100	12	2	Mains / battery	15 kg / 5 g - 30 kg / 10 g	71AI150S000F__

Options

Option	Characteristics	Reference
Metrological verification (M)	Metrological verification (M), according to EU weighing directives.	Consult

Accessories

Italian plate

L357 x W235 x H55 mm.



Ref: BCR71

DB9-DB9 cable

RS-232 communications cable.



Ref: WI371BAA

Note:

- The references correspond to standard models: Black ABS plastic casing, backlit LCD segment display, flat stainless steel plate and RS-232 communications.