


MODEL NUMBER:

- ☐ **4114.001 Kitchen Faucet**
Color matched handspray.
- ☐ **4114.001.Fa5 Kitchen Faucet**
Color matched handspray. .

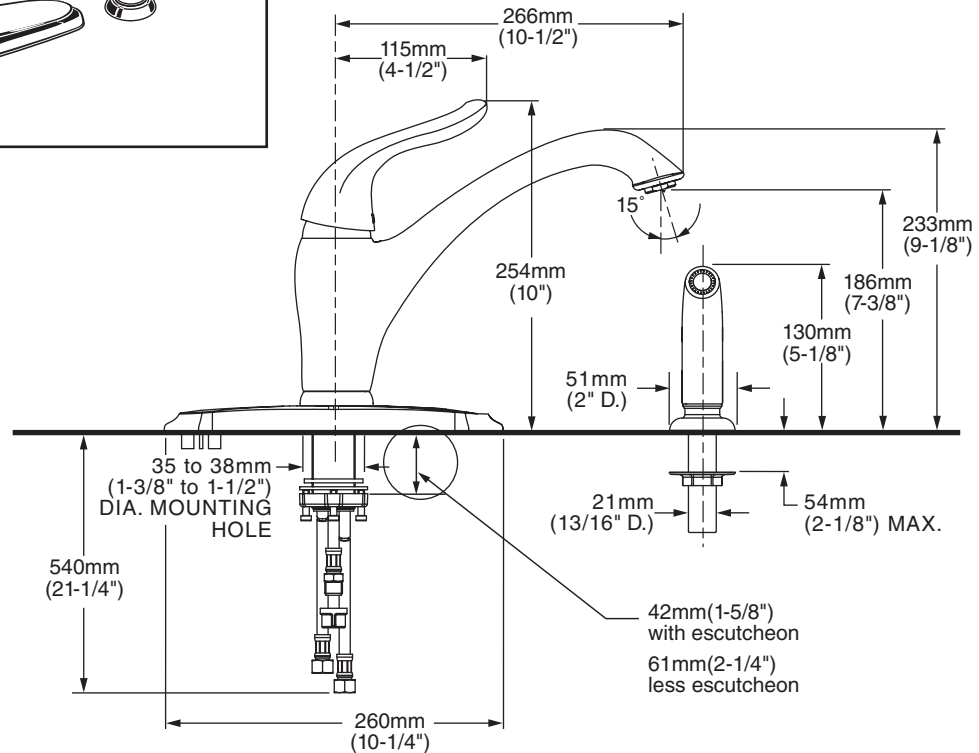

GENERAL DESCRIPTION:

Cast brass body and swivel spout (360° rotation). Metal escutcheon plate and metal lever handle. Washerless 40mm ceramic disc valve cartridge. Braided flexible supply hoses with 3/8" compression connections. 2.2 gpm/8.3 L/min. maximum flow rate, 1.5 gpm/5.7 L/min. maximum flow rate for F15 models Brass mounting shank with brass fixation ring. Can be mounted with or without supplied escutcheon plate (escutcheon size 10-1/4"L x 2-1/2"W). Color-matched hand spray. Cap provided for less spray applications

PRODUCT FEATURES:

Ceramic Disc Valve Cartridge: Assures smooth, precise valve control and a lifetime of drip-free, maintenance-free performance.

Cast Brass Spout: Highest quality materials for durability and long life.

Memory Position Valving: Allows user to turn valve on and off at preferred temperature setting without readjusting handle position each time.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

Choice of Finishes: Choice of Polished Chrome, Stainless Steel (PVD), or Oil Rubbed Bronze.


SUGGESTED SPECIFICATION:

Single control kitchen faucet shall feature a cast brass body and cast brass swivel spout. Metal escutcheon plate, and metal lever handle. Shall also feature washerless ceramic disc valve cartridge, and flexible hose supplies. Fitting shall be American Standard Model # 4114.001.____.____.


CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1
ASME A112.18.1
CSA B 125
NSF 61/Section 9 & Annex G

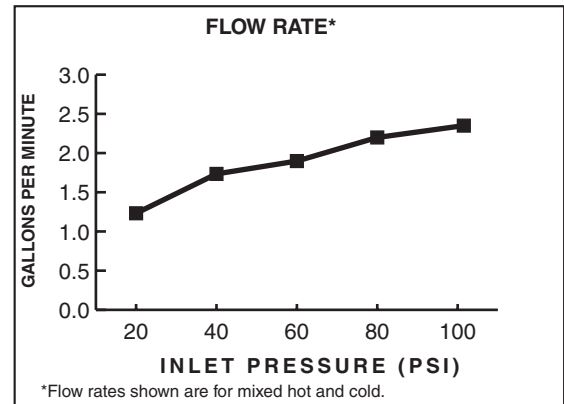


2.2 gpm/8.3 L/min. FLOW RATE

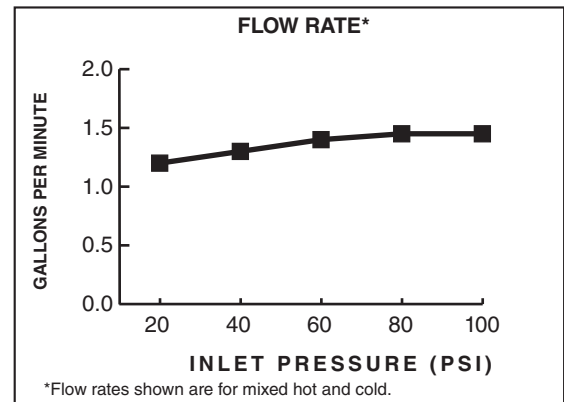

1.5 gpm/5.7 L/min. FLOW RATE

Product Number	Description	Finish Options		
		Polished Chrome	PVD Stainless Steel	Oil Rubbed Bronze
		002	075	224
4114.001	Kitchen Faucet with Side Spray - 2.2 gpm/8.3 L/min. maximum flow rate			
4114.001.F15	Kitchen Faucet with Side Spray - 1.5 gpm/5.7 L/min. maximum flow rate			

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.