

SAN SIMEON

ESTATE SERIES

60 x 37 ¾ x 20 ¼

SOAKER MODEL #W6038OTO

WHIRLPOOL MODEL #W6038O

AIR-WHIRLPOOL MODEL #W29LUX6038



FEATURES ~

- Deep, ergonomic bathing well
- Sculpted armrests
- Pre-leveled ABS support base
- Slip resistant floor
- Premium cast acrylic surface
- Limited lifetime warranty

Note: Not a drop-in model.
Deck must be built around tub.

AVAILABLE SYSTEMS

WHIRLPOOL

- Electronic control
- 7 hydrotherapy jets
 - 3-jet back, shoulder and neck massage system (dual port, spinning)
 - Leg and foot jets
- Whirlpool pump

AIR-WHIRLPOOL COMBINATION

- Whirlpool system, plus:
- Perimeter air system
- Variable speed heated-air blower with purge and dry cycle
- Electronic wave and pulse modes
- 1.5kW inline maintenance heater




Rev. 10.08.18

SAN SIMEON

60 x 37 3/4 x 20 1/4

BASE MODEL	PKG. WT. LBS.	JETS	DRAIN	MODEL #	MSLP
<input type="checkbox"/> Whirlpool	179	7	Univ.	W60380	\$4,007
<input type="checkbox"/> Air-Whirlpool	209	7	Univ.	W29LUX6038	\$5,773



ESTATE

PRODUCT FEATURES

- Sculpted armrests
- Note: Not a drop-in model. Deck must be built around unit.

ILLUSTRATION KEY

AIR-WHIRLPOOL MODELS

P = Pump Location

B = Blower Location

WHIRLPOOL ONLY MODELS

P = Pump Location

OPTIONS (x = insert desired option code)	ENTER DESIRED OPTION CODE	MSLP
Cast acrylic stock color (COLxx): White (WH)		No charge
Cast acrylic color upgrade (COLxx): Biscuit (BI)		\$35
Cast acrylic premium color upgrade (COLxx): Black (BK) Sterling Silver (ST)		\$389
Pump location (PLxx): Standard Location (L1) Location 2 (L2) (whirlpool only)		No charge
Metallic trim finish: Chrome (MTCH)		\$315
Metallic trim finish (MTxx): Polished Brass (BR) Brushed Nickel (SN)		\$390
Magnetic pillow (MPxxxxx): White (WHPIL) Black (BKPIL)		\$105
Cable drive waste & overflow: Chrome (CDCHCD)		\$345
Cable drive waste & overflow, color-matched (CDxxxx): Biscuit (BICD) White (WHCD)		\$390
Cable drive waste & overflow (CDxxxx): Oil Rubbed Bronze (OBCD) Polished Brass (BRCD) Brushed Nickel (SNCD)		\$440
Chromatherapy, installed (CLM1)		\$335
Inline heater - 1.5kW, factory installed (whirlpool only) (HTH1)		\$400
Wood shipping crate (PKCR)		\$460
Rush order program* (DELQK)		\$325
Residential delivery with lift gate* (DELLG)		\$454

*For program terms and conditions, see page iii.

BASE PRICE (insert MSLP of base model selected in upper table)

+ \$ _____

OPTIONS SUB TOTAL

\$ _____

ORDER TOTAL

= \$ _____

ORDERING KEY

In the part number, "xx" means an option code must be inserted.

Cast Acrylic stock color (COLxx): ← part number


option code → White (WH)

Example: COLxx + WH = COLWH
Cast Acrylic stock color in White

Manufacturer reserves the right to discontinue models, colors, options and trim finishes without notice.


Customer Name: _____ Date: _____

Additional Information: _____

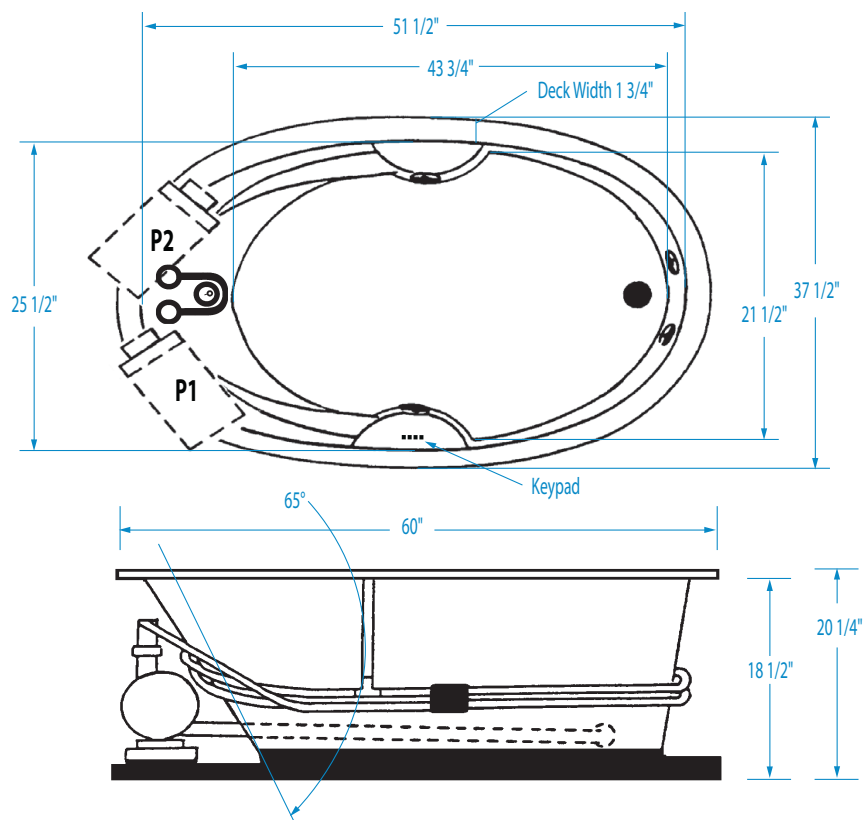


SAN SIMEON

60 x 37 3/4 x 20 1/4 inches



Note: For Air-whirlpool, no alternate pump/blower location available.

Note: No Grab Bar option available.



Note: Tub Only units do not come standard with the Pre-leveled ABS Support Base.

FEATURES lbs (kg) Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	Jets	Pump	Air System	Blower	Heater	Controls	Drain	Pkg. Wt.
Soaker #W6038OTO	Cast Acrylic	0	—	—	—	—	—	Universal	139
Whirlpool #W6038O	Cast Acrylic	7	102 GPM	—	—	1.5 kw Inline (optional)	Electronic	Universal	179
Air-Whirlpool #W29LUX6038	Cast Acrylic	7	102 GPM	Channel	Variable speed	1.5 kw Inline	Electronic	Universal	209

DIMENSIONS inches

Width Overall / Net	Depth Overall / Net	Height Overall / Net	Skirt Height
60	37 3/4	20 1/4	—

SUMP DATA inches

Capacity to Overflow gal (ltr)	Min. Operating Capacity gal (ltr)	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
60	41	51 1/2	43 3/4	25 1/2	21 1/2

PLUMBING DIMENSIONS inches

A	B	Drain Diameter / Clearance
2 1/2	9 3/8	2 / 1 3/4

NOTES:

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16 x 16 minimum access required at pump/blower location(s).

3) If a (3T) tiling flange is selected, then the keypad is located opposite of the flange.

ELECTRICAL DATA

Component	Specification	Requirement
Pump	9 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI
Optional Heater	1.5 kW; 12 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI
Blower	1.0 HP; 9.5 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI

NOTE:

1) This whirlpool must be hard wired to the breaker box. Three outlets will be supplied on the air-whirlpool.