

# SUBMITTAL DATA SHEET

24000 Series  
4" Stainless Steel 5-25 GPM

## K Series - 10 GPM



All K series submersible pumps are designed to pump within the 10 GPM range. Sizes are available from 1/2 to 5 HP. All models are standard with 1 1/4" NPT discharge.

### Models Available

#### Two Wire Single Phase


Model No.	HP	Stages	Volt	A	B	C	Wt.
24050K2	1/2	7	230	10.7	9.5	20.2	24.2
24050K2A	1/2	7	115	10.7	9.5	20.2	24.2
24075K2	3/4	10	230	12.8	10.6	23.4	28.3
24100K2	1	12	230	14.1	11.7	25.8	32.0
24150K2	1 1/2	17	230	17.6	15.1	32.7	40.7

#### Three Wire Single Phase

Model No.	HP	Stages	Volt	A	B	C	Wt.
24050K3	1/2	7	230	10.7	9.5	20.2	25.2
24050K3A	1/2	7	115	10.7	9.5	20.2	25.2
24075K3	3/4	10	230	12.8	10.6	23.4	28.3
24100K3	1	12	230	14.1	11.7	25.8	32.0
24150K3	1 1/2	17	230	17.6	13.6	31.2	37.7
24200K3	2	20	230	19.6	15.1	34.7	43.8
24300K3	3	27	230	26.0	19.0	45.0	54.3
24500K3	5	42	230	36.1	29.2	65.3	90.0

#### Three Wire Three Phase

Model No.	HP	Stages	Volt	A	B	C	Wt.
24150K3Z	1 1/2	17	230	17.6	11.7	29.3	33.7
24200K3Z	2	20	230	19.6	13.6	33.2	38.8
24300K3Z	3	27	230	26.0	16.0	42.0	48.3
24500K3Z	5	42	230	36.1	23.2	59.3	75.0

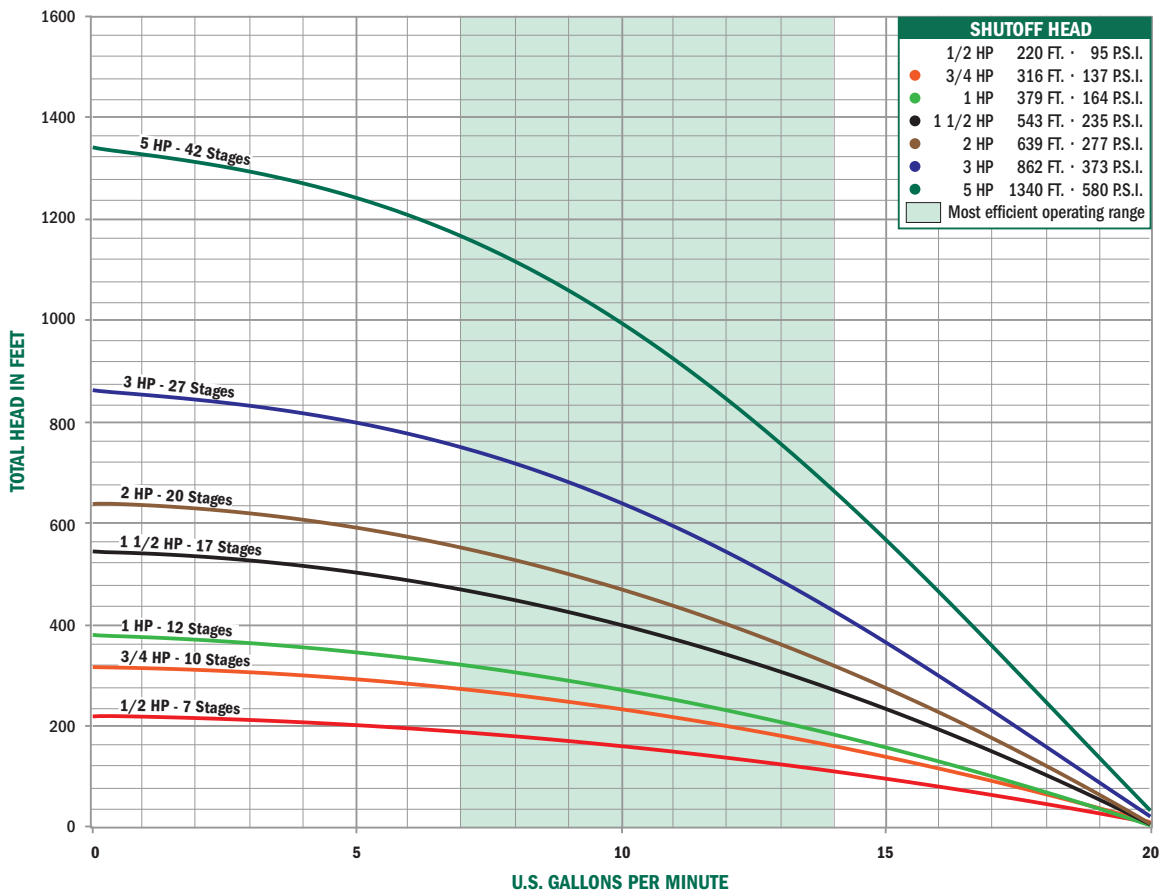

**NO-LEAD:** The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.  
P.O. Box 508  
Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737  
Fax: 1-800-832-9296  
Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com  
www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by:

# SUBMITTAL DATA SHEET

24000 Series  
4" Stainless Steel 5-25 GPM


## K Series - 10 GPM



All K series submersible pumps are designed to pump within the 10 GPM range. Sizes are available from 1/2 to 5 HP. All models are standard with 1 1/4" NPT discharge.

### Output - in Gallons Per Minute (Depth to Water)

HP	PSI	25'	50'	75'	100'	125'	150'	175'	200'	225'	250'	275'	300'	325'	350'	375'											
1/2 HP	0	19.2	17.8	16.3	14.7	12.9	10.9	8.5	5.2																		
	30	15.1	13.4	11.4	9.1	6.1																					
	50	11.7	9.5	6.6																							
	60	9.7	6.9																								
3/4 HP	0	19.5	18.6	17.6	16.7	15.6	14.5	13.3	12.0	10.5	8.8	6.8	3.9														
	30	16.9	15.9	14.8	13.6	12.3	10.9	9.2	7.3	4.7																	
	50	14.9	13.8	12.5	11.1	9.5	7.6	5.2																			
	60	13.9	12.6	11.2	9.6	7.8	5.4																				
1 HP	0	19.4	18.6	17.8	17.0	16.2	15.3	14.3	13.3	12.3	11.1	9.8	8.4	6.7	4.5	1.0											
	30	17.2	16.4	15.5	14.6	13.6	12.5	11.4	10.1	8.7	7.1	5.1	2.1														
	50	15.6	14.7	13.7	12.7	11.5	10.3	8.9	7.3	5.4	2.7																
	60	14.8	13.8	12.8	11.6	10.4	9.0	7.5	5.6	3.0																	
1 1/2 HP	0	19.1	18.1	17.0	15.8	14.6	13.2	11.7	10.0	7.9	5.2																
	30	17.7	16.6	15.4	14.1	12.6	11.1	9.2	7.0	3.7																	
	50	16.6	15.5	14.2	12.8	11.2	9.4	7.2	4.0																		
	60	16.1	14.9	13.5	12.1	10.4	8.4	5.9																			
2 HP	0	19.3	18.4	17.5	16.5	15.5	14.4	13.3	12.0	10.6	9.0	7.1	4.5														
	30	18.1	17.1	16.2	15.1	14.0	12.8	11.5	10.0	8.3	6.2	3.0															
	50	17.2	16.2	15.2	14.1	12.9	11.6	10.1	8.4	6.4	3.3																
	60	16.8	15.8	14.7	13.6	12.3	10.9	9.4	7.5	5.1																	
3 HP	0	19.6	18.9	18.2	17.4	16.7	16.0	15.2	14.4	13.6	12.8	11.9	10.9	9.8	8.5	7.0	4.9	1.4									
	30	18.6	17.9	17.2	16.4	15.7	14.9	14.1	13.3	12.4	11.5	10.5	9.3	8.0	6.3	3.8											
	50	17.9	17.2	16.5	15.8	15.0	14.2	13.4	12.5	11.6	10.5	9.4	8.1	6.4	4.1												
	60	17.6	16.9	16.2	15.4	14.6	13.8	13.0	12.2	11.5	10.8	10.1	9.3	8.5	7.6	6.5	5.1	3.2									
5 HP	0	19.8	19.4	18.9	18.5	18.0	17.5	17.1	16.6	16.1	15.7	15.2	14.7	14.2	13.6	13.1	12.5	11.9	11.3	10.6	9.9	9.2	8.3	7.3	6.2	4.7	2.7
	30	19.2	18.7	18.3	17.8	17.4	16.9	16.4	16.0	15.5	15.0	14.5	14.0	13.4	12.9	12.3	11.7	11.1	10.4	9.6	8.8	7.9	6.9	5.7	4.0	1.5	
	50	18.8	18.3	17.9	17.4	16.9	16.5	16.0	15.5	15.0	14.5	14.0	13.5	12.9	12.3	11.7	11.1	10.4	9.7	8.9	8.0	7.0	5.8	4.2			
	60	18.6	18.1	17.6	17.2	16.7	16.2	15.8	15.3	14.8	14.3	13.8	13.2	12.7	12.1	11.5	10.8	10.1	9.3	8.5	7.6	6.5	5.1	3.2			

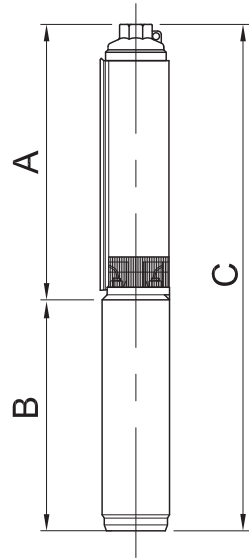

FRICION LOSSES IN RISER PIPE HAVE NOT BEEN CALCULATED

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.  
P.O. Box 508  
Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737  
Fax: 1-800-832-9296  
Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com  
www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: