

# BSC SERIES PVC SUMP PUMP CHECK VALVES




## APPLICATION:

- Full port valve design
- Flapper opens 100%
- Flapper seat design reduces water hammer and debris buildup
- Designed to be threaded directly into pump discharge

## SPECIFICATION:

- Standard part has a drill indicator
- -AR part has an air release hole drilled
- Max Temperature Rating: 140°F (60°C)
- Material: ABS
- Rubber Boot Installation: 10 feet of head/4.3 PSI
- Solvent Weld Installation: 58 feet of head/25 PSI

PROUDLY  
MANUFACTURED BY:  
**BOSHART**  
INDUSTRIES

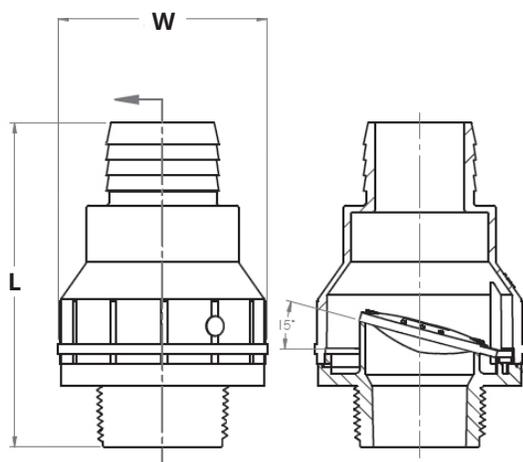

Zero Obstruction Valve Seal Opens 100%

DIMENSIONS								
Part No. Standard	Part No. Air Release	Inlet	Outlet	L		W		Weight grams
		MPT	Barb or Spigot/FRC	inches	mm	inches	mm	
BSC-125-B	BSC-125-B-AR	1-1/4"	1-1/4" or 1-1/2"	4.06	103.12	2.61	66.29	69
BSC-150-B	BSC-150-B-AR	1-1/2"	1-1/4" or 1-1/2"	4.07	103.38	2.61	66.29	73
BSC-150-150B	BSC-150-150B-AR	1-1/2"	1-1/4" Barb	4.23	107.44	2.61	66.29	83
BSC-125	BSC-125-AR	1-1/4"	1-1/4" or 1-1/2"	4.06	103.12	2.61	66.29	83
BSC-125-150S	BSC-125-150S-AR	1-1/4"	1-1/2" Spigot	4.06	103.12	2.61	66.29	83
BSC-150	BSC-150-AR	1-1/2"	1-1/4" or 1-1/2"	4.44	112.78	2.61	66.29	87
BSC-150-150S	BSC-150-150S-AR	1-1/2"	1-1/2" Spigot	4.00	101.60	2.61	66.29	82



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0  
Tel: 800-561-3164

[boshart.com](http://boshart.com) ♦ [blog.boshart.com](http://blog.boshart.com)