

# SSPEXBV SERIES 304 STAINLESS STEEL BALL VALVE (PEX)



## SPECIFICATION:


- For use with ASTM F2769, ASTM F2023, (PE-RT) SDR9 pipe
- For use with ASTM F876 PEX pipe
- Max Pressure Rating: 600 PSI CWP
- CWP - Cold Working pressure, is an indication of the pressure rating for valves at a temperature range of up to +100°F (37°C)
- Max Temperature Rating: -40°F to 200°F (-40°C to 93°C)
- Two piece investment cast body
- Blow-out proof stem
- Solid Stainless Steel Ball
- Stainless steel handle with blue plastic sleeve

## CERTIFICATION:

- cUPC Listed
- NSF/ANSI 61 & 372 Certified



MATERIAL LIST	
Part Name	Material
Body	304 Stainless Steel
Cap	304 Stainless Steel
Ball	201 Stainless Steel
Stem	Zinc Plated Steel
Seat	PTFE
Stem O-ring	NBR
Spring Washer	Zinc Plated Steel
Nut	Zinc Plated Steel
Handle	304 Stainless Steel

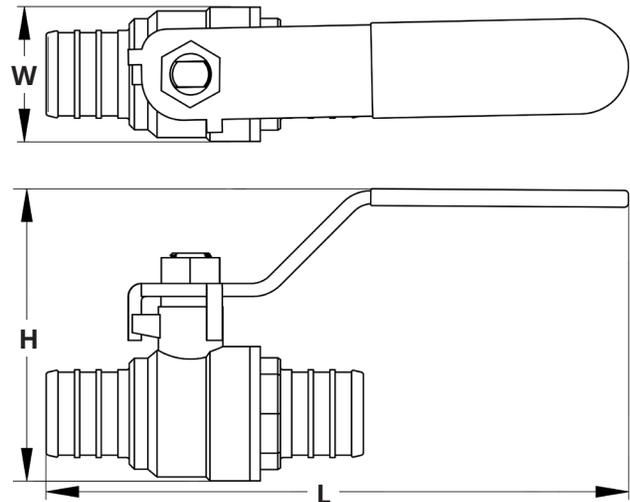

DIMENSIONS									
Part No.	Size	H		L		W		Weight	
		inches	mm	inches	mm	inches	mm	lbs	grams
SSPEXBV-05	1/2"	0.85	21.59	4.55	115.57	1.60	40.64	0.16	72.57
SSPEXBV-07	3/4"	1.00	25.40	4.55	115.57	1.80	45.72	0.23	104.33
SSPEXBV-10	1"	1.35	34.29	5.90	149.86	2.30	58.42	0.44	199.58

**BOSHART**  
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0  
Tel: 800-561-3164

[boshart.com](http://boshart.com) ♦ [blog.boshart.com](http://blog.boshart.com)