



Pre-Rinse Faucets

CER-TECK® 203mm (8") Center Wallmount Base
Faucet

Model No: 55C1583-S7

COMPLIES WITH:

- CSA certified.
- Complies to ASME A112.18.1/CSA B125.1
- Energy Saver Spray certified to ASTM F2324-03 in accordance with the Energy Policy Act of 2005
- Verified compliant with 0.25% weighted average Pb content regulations
- ♿ Indicates compliance to ICC/ANSI A117.1
- (Contact Delta Representative for State and/or Local Approvals)



NOTES:

Verified compliant with 0.25% weighted average Pb content regulations

SPECIFICATION:

- 203mm(8") center two handle WALLMOUNT pre-rinse faucet
- Cast brass body with integral check stops to prevent crossflow
- Centers adjustable from 7.75" to 8.25" unless AC option selected
- Polish chrome plated finish
- CER-TECK® ceramic structures
- Both standard 1.6 USGPM & Energy Saver 1.2 USGPM @ 60 PSI pre-rinse spray outlets included
- Spout: S7 - 279mm (11") Tubular Swing Spout(S7)
- Handle#: 3 - 76 mm (3") Lever Blade Handles-ADA Compliant-Metal-Color indexed-Vandal Resistant screws
- Self Close Pre-Rinse Spray with spring loaded stainless steel hose, add-on faucet with standard 8" tubular spout and 1.5 USGPM (5.7 L/min) aerator



OPERATION:

- Not Available

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced September 20, 2017.

Delta Faucet Company - 55 East 111th St. - Indianapolis, Indiana, USA 46280 - (317) 848-1812
Delta Faucet Canada - 395 Matheson Blvd E - Mississauga, Ontario, Canada L4Z 2H2 - (905) 712-3030

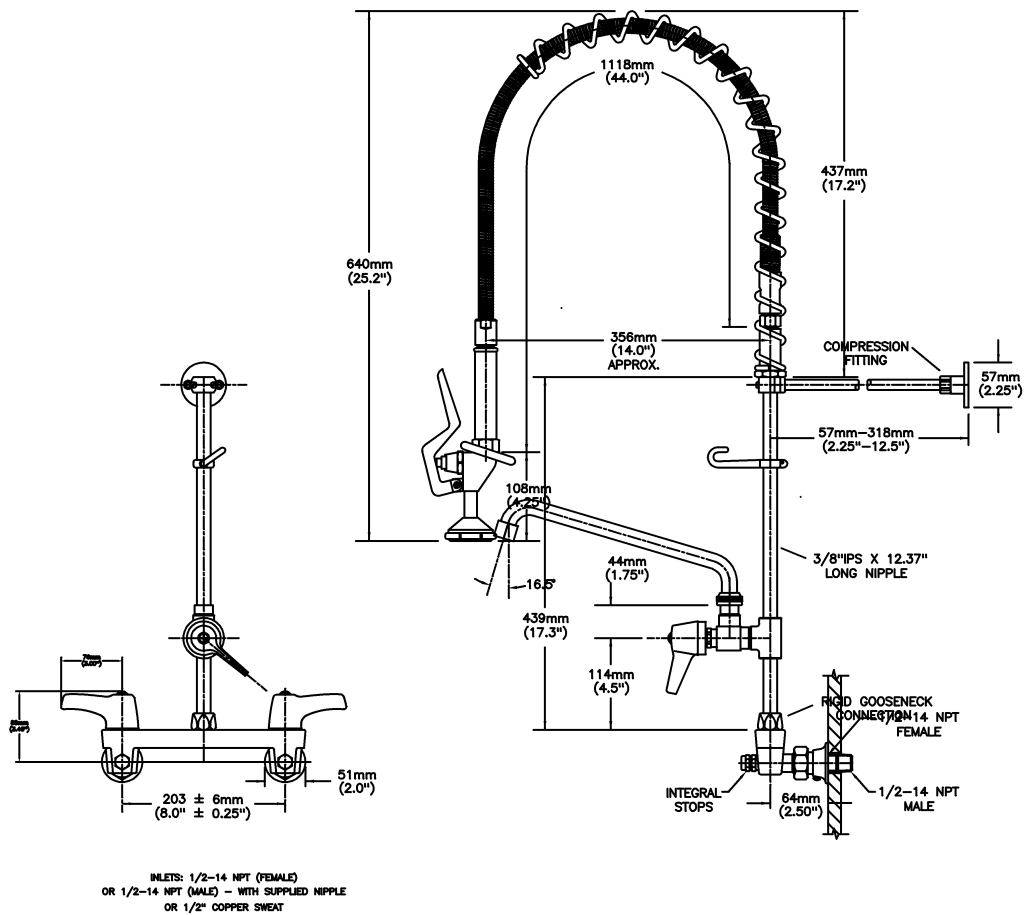

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced September 20, 2017.