

# 591T Series – Electronic Faucet Trim

## For Recess Mounted Control Box

**TECK®**  
COMMERCIAL



### Specification: (example)

- Supplied as trim parts only – requires separate order of ELAVT0001ARI\* or ELAVT0008ARI\* rough-in to have complete product
- **H<sub>2</sub>Optics®** technology – no external adjustments required
- Chrome-plated **CAST** 102 mm (4") spout body with integral sensor
- Adjustable sensing range and timeout
- **Battery** (4 "C" cell) or **Hardwire** (24VAC) infrared electronic handwash
- Serviceable filter screen upstream of the solenoid valve
- Metal hold-down package

and...

with... (specify battery or hardwire)

with... (add outlet required)

with... (for hardwire with battery backup – specify separately – see next page)

with... (transformer for hardwire operation – specify separately – see next page)

**591T1258TR**



### Engineer/Architect Approval

Model Specified:







Approval:

Date:

DESCRIPTION	PRODUCT NO. (FOR TRIM ONLY)				
Trim Only for Hardwire	591T0	2		8	TR
Trim Only for Battery Operated	591T1	2		8	TR

**Rough-In Product**  
Number ELAVT0001ARI\*  
or ELAVT0008ARI\* –  
Order separately



SPOUT & SENSOR	OUTLET	CONTROL BOX
0 <input type="checkbox"/>	0 <input type="checkbox"/>	0 <input type="checkbox"/>
1 <input type="checkbox"/>	1 <input type="checkbox"/>	1 <input type="checkbox"/>
2 4" <b>CAST</b> Lavatory Spout  <input checked="" type="checkbox"/>	2 Vandal Resistant 1.5 gpm (5.7 L/min.) Laminar w/Agion® Antimicrobial  <input type="checkbox"/>	2 <input type="checkbox"/>
3 <input type="checkbox"/>	3 Vandal Resistant 1.5 gpm (5.7 L/min.) Flow Control Aerator  <input type="checkbox"/>	3 <input type="checkbox"/>
4 <input type="checkbox"/>	4 <input type="checkbox"/>	4 <input type="checkbox"/>
5 <input type="checkbox"/>	5 Vandal Resistant 0.5 gpm (1.9 L/min) Laminar Outlet  <input type="checkbox"/>	5 <input type="checkbox"/>
6 <input type="checkbox"/>	6 Vandal Resistant 1.0 gpm (3.8 L/min) Laminar Outlet  <input type="checkbox"/>	6 <input type="checkbox"/>
7 <input type="checkbox"/>	7 <input type="checkbox"/>	7 <input type="checkbox"/>
8 <input type="checkbox"/>	8 <input type="checkbox"/>	8 12" S/S Cover, Driver Board, Solenoid for use with ELAVT0001ARI* or ELAVT0008ARI* (Rough-in ordered separately) <input checked="" type="checkbox"/>
9 <input type="checkbox"/>	9 Vandal Resistant 0.35 gpm (1.32 L/min.) Non-Aerating Spray Outlet  <input type="checkbox"/>	9 <input type="checkbox"/>

\*ELAVT0001ARI – no mixing valve or ELAVT0008ARI with thermostatic mixing valve – specify separately.  
Refer to [www.specselect.com](http://www.specselect.com) for individual models.

Flow Rates are at 60 PSI.  
Note: Use these pages as product submittal sheets.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation.  
Dimensions are for reference only. See current full-line price book or [www.specselect.com](http://www.specselect.com) for finish options and product availability.

DSP-591TCB8 Rev. C



**TECK®  
COMMERCIAL**

## 591T Series – Electronic Faucet Trim For Recess Mounted Control Box


### Approvals:

- CSA certified
- Complies to ASME A112.18.1/CSA B125.1
- Indicates compliance to ICC/ANSI A117.1
- Outlet options 2, 3 and 6 are EPA WaterSense listed
- Verified compliant with 0.25% weighted average Pb content regulations

(Contact Delta Representative for State and/or Local Approvals.)

Patented

### FLOW RATE vs PRESSURE

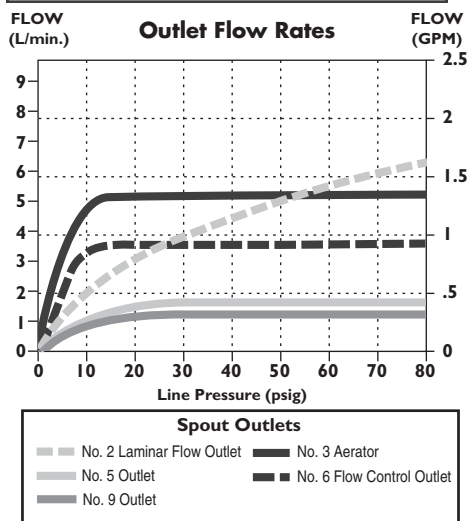

### OPERATION:


- Hands free (touchless) operation.
- Water flows when sensor is activated.
- Water flow stops upon de-activation of sensor.
- Adjustable auto shut-off feature. Factory set to 45 seconds. Will reset once obstruction is removed.
- Adjustable sensing distance 76 to 381 mm (3" to 15") factory set to 229mm (9") ( $\pm 3.0$ ")
- Low battery audible beep (for battery models only) will activate after faucet shuts off when approximately 1500 cycles remain.
- Metering mode with selectable flow times of 7 seconds to 4 minutes, factory set off.
- Periodic Rinse feature, time adjustable in 6 hour increments up to 2 days. Selectable rinsing lengths from 10 to 180 seconds. Factory set off.

**NOTE 1:** For optimum performance of this product, we recommend a system pressure between 20 and 80 PSI static. This product will operate up to a maximum of 125 PSI static per ANSI and CSA requirements. However, we do not recommend pressures above 80 PSI. Thermal expansion or leaking pressure reducing valves may require use of expansion tanks or relief valves to ensure your system never exceeds its maximum intended pressure setting.


**NOTE 2:** Trim used with ELAVT0001ARI designed for routine 171°F (77°C) disinfection cycles up to 30 minutes. Trim used with ELAVT0008ARI is not recommended for high temperature disinfection cycles as the thermostatic mixing valve limits the higher temperature flow outlet.

Note: Measurements may vary  $\pm 6$ mm (0.25")


### FRONT VIEW

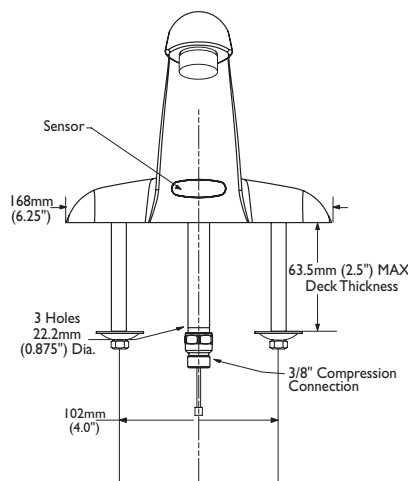

### SIDE VIEW

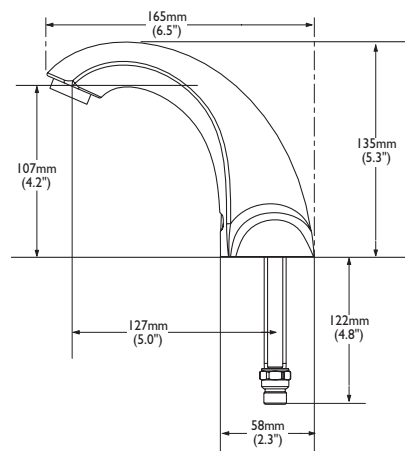

### TYPICAL INSTALLATION

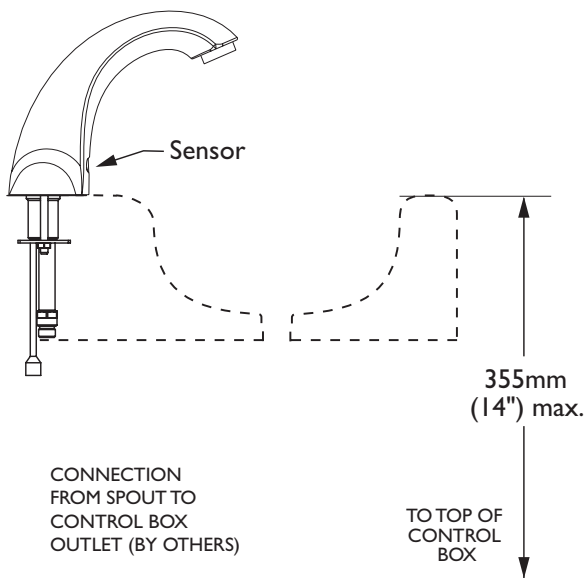

### Available Options for Field Conversion

- ☐ **061047A**  
Hardwire with Battery Backup  
See DSP-BB for detailed specification.
- ☐ **060651A**  
3 Position Switch  
See DSP-ELACC for detailed specification.

### OPTIONAL ACCESSORIES

OPTIONAL ACCESSORIES			
✓	<b>TRANSFORMERS</b>		
	060704A	110 to 24VAC Class II 20VA	(Up to 5 Electronic Valves)
	060771A	110 to 24VAC Class II 40VA	(Up to 10 Electronic Valves)
✓	<b>CORDS</b>		
	061256A	36" Cable Extension	

Refer to [www.specselect.com](http://www.specselect.com) for individual models.

Product supplied as shown by solid lines. All items shown by dotted lines supplied by others.