

# Exposed TECK® Flush Valve

**TECK®**  
COMMERCIAL

**DELTA®**

## Specification: (example)

### (FOR 1-1/2" TOP INLET CLOSET FIXTURE)

- Quiet action, TECK® exposed diaphragm flush valve
- Chloramine resistant diaphragm
- Forged brass diaphragm retainer
- Renewable seat
- Polished chrome plated body
- **External water conserving flush volume adjustment,** (except -48 and -6 models) factory set to 6 litre (1.6 gal.)
- Vandal resistant cover screw
- Metal "non hold open" handle
- **1" FIP/copper sweat inlet adaptor** angle check stop with protecting cap
- Adjustable 121mm (4-3/4") plus or minus 11mm (7/16") inlet/valve outlet centers
- Vacuum breaker
- Cover tube and S/S wall flange, spud flange and concealed spud nut
- **Recommended water supply:**  
Minimum flowing pressure – 25 psi (172 kPa)  
Minimum flow rate – 25 gpm (95 L/min)

### WITH 292mm (11-1/2") LENGTH:

- ☐ **81T201**  
As above
- ☐ **81T201-1**  
Same as 81T201, but with trap seal primer tee
- ☐ **81T201-5**  
Same as 81T201, but with center cover bumper
- ☐ **81T201-6**  
Same as 81T201, but **Not Field Adjustable**
- ☐ **81T201-48**  
Same as 81T201, but factory set to 4.8 litre (1.27 gal.), **Not Field Adjustable**
- ☐ **81T201-56**  
Same as 81T201-5, but **Not Field Adjustable**
- ☐ **81T201-548**  
Same as 81T201-5, but factory set to 4.8 litre (1.27 gal.), **Not Field Adjustable**

### WITH 610mm (24") LENGTH

- ☐ **81T221**  
As above
- ☐ **81T221-1**  
Same as 81T221, but with trap seal primer tee
- ☐ **81T221-6**  
Same as 81T221, but **Not Field Adjustable**
- ☐ **81T221-48**  
Same as 81T221, but factory set to 4.8 litre (1.27 gal.), **Not Field Adjustable**



## Approvals:

- IAPMO listed to ASSE 1037/ ASME A112.1037/ CSA B125.37
- Indicates compliance to ICC/ANSI A117.1

(Contact Delta Representative for State and/or Local Approvals.)


## Engineer/Architect Approval

Model Specified:



Approval:

Date:

Note: Measurements may vary  $\pm 6$ mm (0.25")

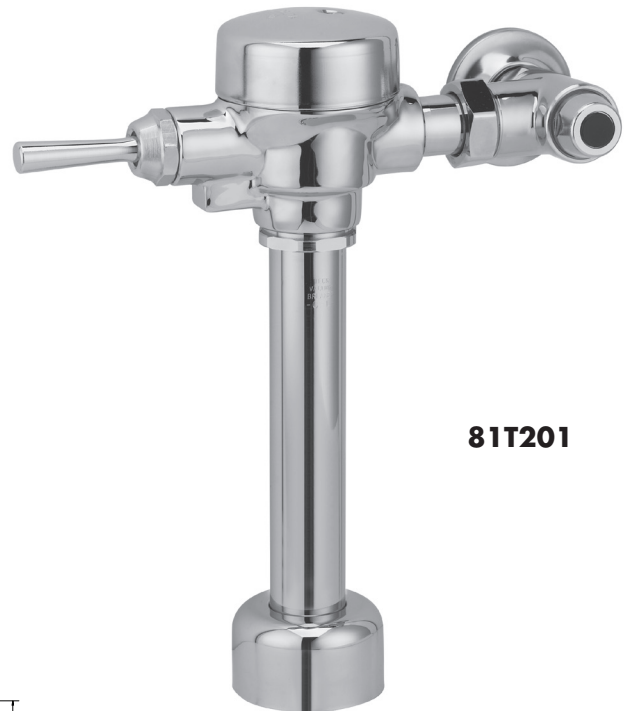

**81T201**

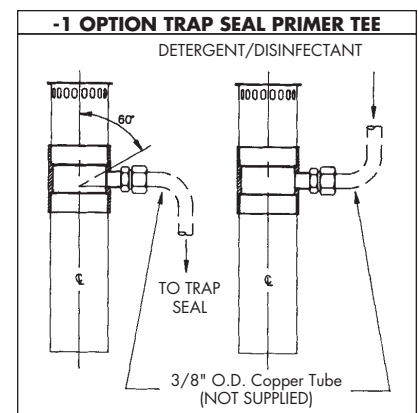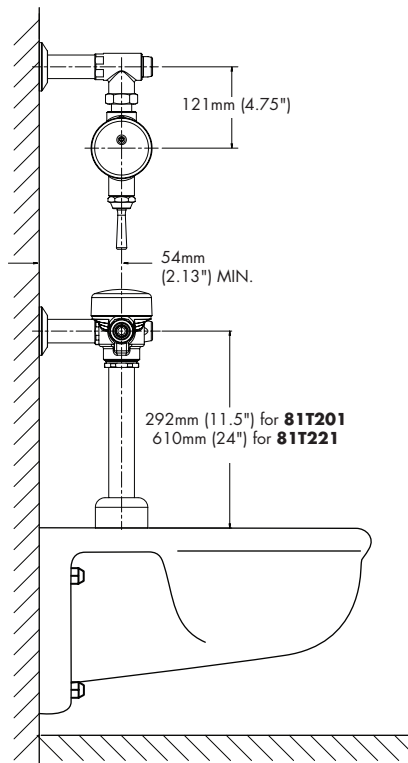

Note: For high and low pressure applications, please see page FEA-81T High Water Pressure note for more details.  
Verify flow requirements with bowl manufacturer.