



TRIM ONLY for Tub and Dual Shower unit w/standard
24" Slide Bar handshower and shower diverter valve
with diverter spout-backflow protection provided by
two integral check valves in handshower-requires
separate order of R10700-UNWS Rough-in



- Polished chrome plated finish - Pressure Balance cartridge - Temperature only controlled with handle - Field adjustable to limit handle rotation into hot water zone
 - Integral checks in the cartridge prevent crossflow between Hot and Cold water inlets
- OPERATION:**
- Cartridge rated minimum 1.2 gpm @ 45 psi (4.5 L/min @ 310 kPa).

- Non-Removable Blue/Red visual cover indicator for Cold, Mixing and Hot Water.
- **NOTE FOR SHOWER #6: Not for use as anti-ligature device.**
- Standard 24" Slide Bar handshower and shower diverter valve with diverter spout-backflow protection provided by two integral check valves in handshower ADA Compliant diverter handle
- Handshower MAX: 1.5 GPM @ 80 PSI (5.7 L/min @ 552 kPa)
- Plumbing Codes require that showerheads and handshowers provide a small but certain minimum flow of water (trickle) when in "PAUSE" mode. Because of this continuous flow, in certain circumstances pressure fluctuations in the water supply and/or other large volume position of the shower temperature control handle while in "PAUSE" mode could result in dramatic changes to the temperature of the water when the shower head or hand shower is returned to the "ON" position.
- Optional 1220-PS-2000 and 1220-PS-2000-L showerheads (1220-PS-2000-L showerhead is 1220-PS-2000-L) Long CP Stainless Steel Hose Stretches to 92" (2337 mm)
- ALWAYS point the shower head away from yourself when returning to the "ON" position and feel the water with your hand before resuming your shower.
- Shower Flow Rate MAX: 1.5 GPM @ 80 PSI (5.7 L/min @ 552 kPa)
- Shower Flow Rate MIN: 1.5 GPM @ 140 PSI (5.7 L/min @ 965 kPa) when to use the "PAUSE" function.


Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced May 24, 2017.

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced May 24, 2017.

Delta Faucet Company - 55 East 111th St. - Indianapolis, Indiana, USA 46280 - (317) 848-1812
Delta Faucet Canada - 395 Matheson Blvd E - Mississauga, Ontario, Canada L4Z 2H2 - (905) 712-3030

Model No: T13H982-20

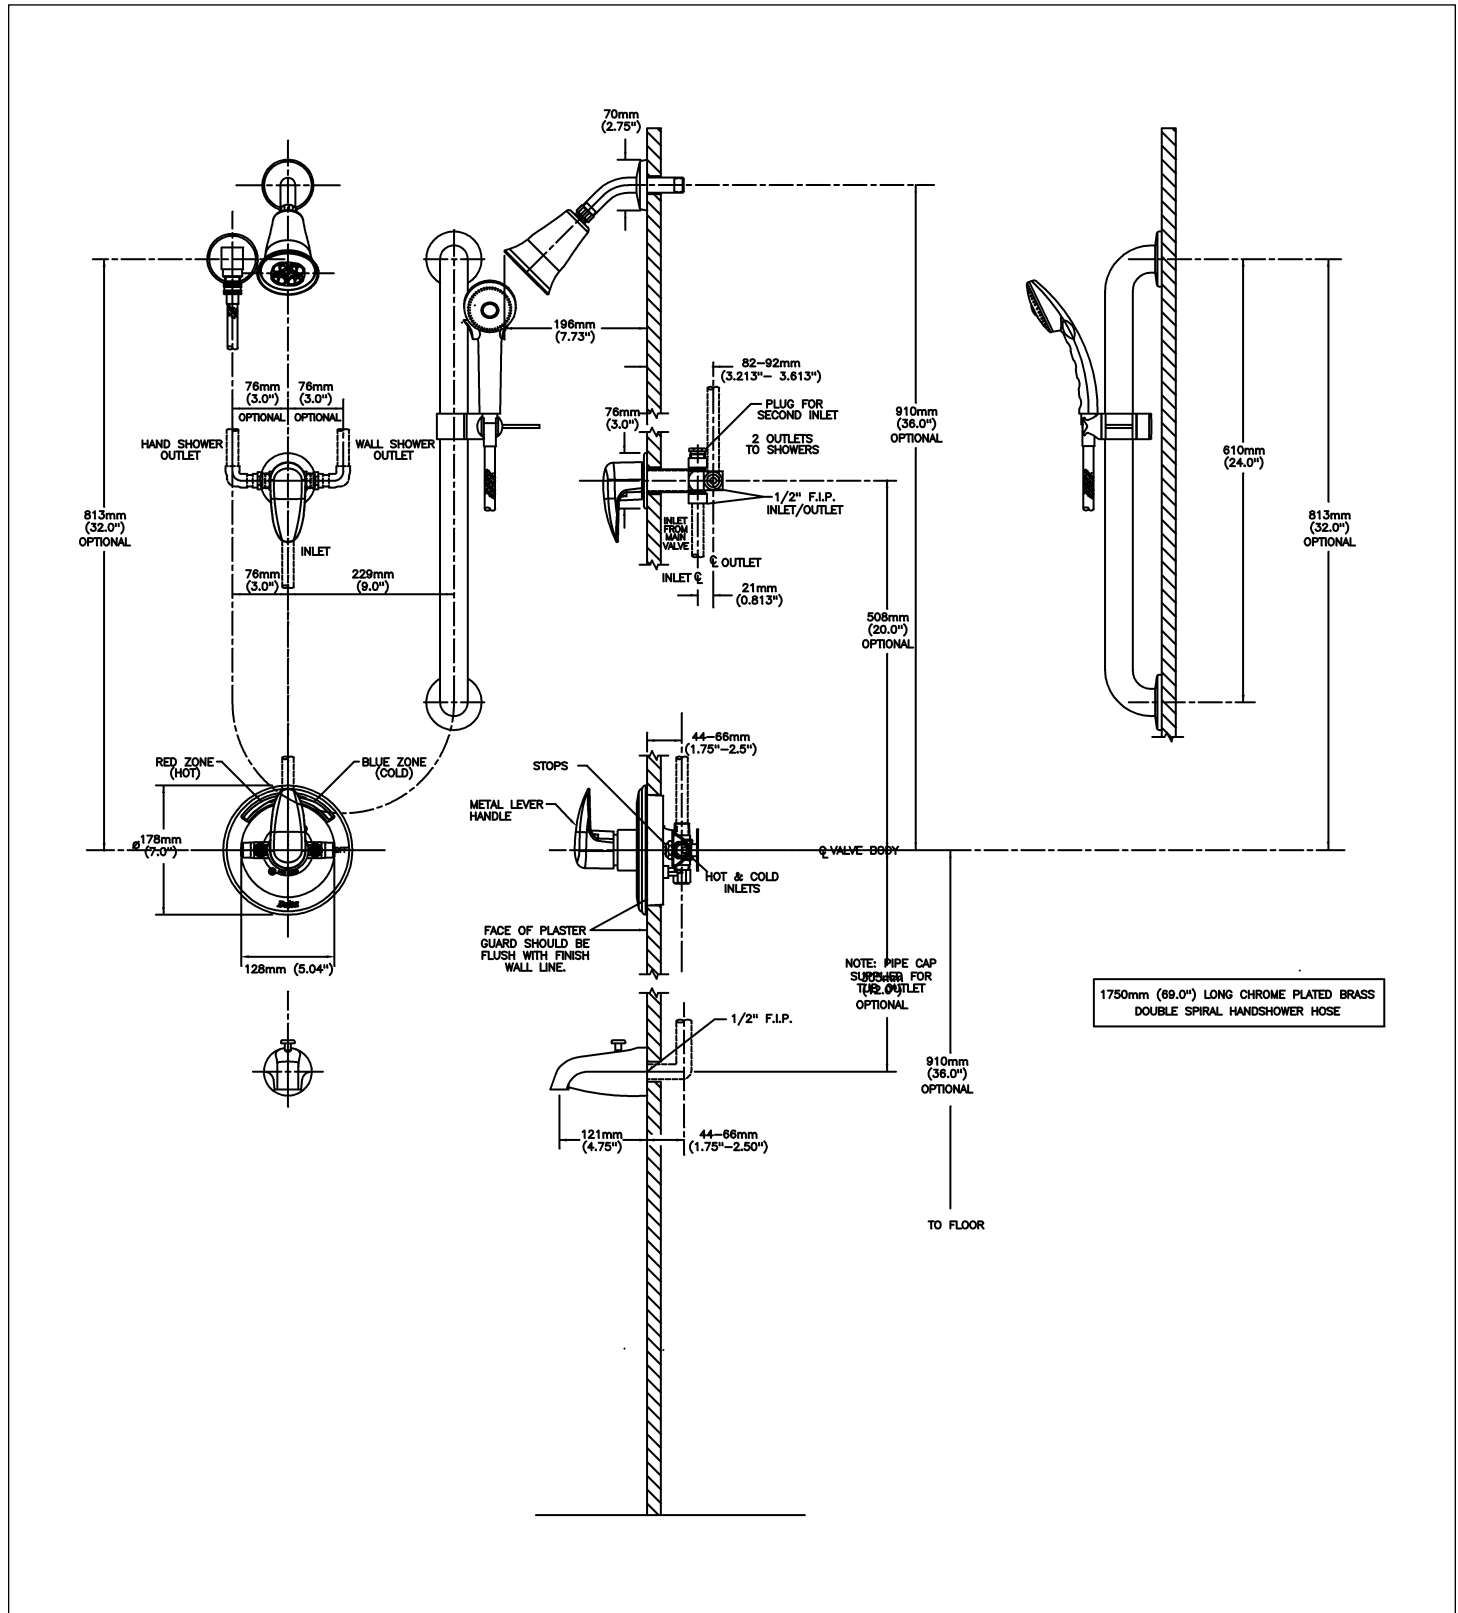

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced May 24, 2017.

Delta Faucet Company - 55 East 111th St. - Indianapolis, Indiana, USA 46280 - (317) 848-1812
 Delta Faucet Canada - 395 Matheson Blvd E - Mississauga, Ontario, Canada L4Z 2H2 - (905) 712-3030