

Tub and Shower

TRIM ONLY MultiChoice[™] Universal Thermostatic shower with Diverter Tub Spout - requires separate order of R10000-UNWS Rough-in

SPECIFICATION:

- TempAssure® 17T Thermostatic cartridge
- Thermostatic wax element maintains the outlet temperature to +/- 3.6 F
- Polished chrome plated finish
- Non-removeable red/blue temperature markings
- Cartridge rated minimum 1.7 gpm @45 psi (6.4 L/min @ 310kPa)
- TRIM ONLY MultiChoice[™] Universal Thermostatic shower with Diverter Tub Spout - requires separate order of R10000-UNWS Rough-in
 Spout: - - 1/2" IPS metal spout with pull up diverter
- Spout: - 1/2" IPS metal spout with pull up diverter
- Handle#: 5 Metal Lever Volume Control Handle w/Temperature Adjustment
- No fixed shower outlet supplied

OPERATION:

Not Available

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced May 25, 2017.

Ŀ

Model No: T17TH205 COMPLIES WITH:

Lindicates compliance to ICC/ANSI A117.1


Volume Control lever handle ADA compliant to ICC/ANSI A117.1/ADA

• (Contact Delta Representative for State and/or Local Approvals)

ASME A112.18.1 / CSA B125.1

Thermostatic Valve ASSE 1016

Model No: T17TH205

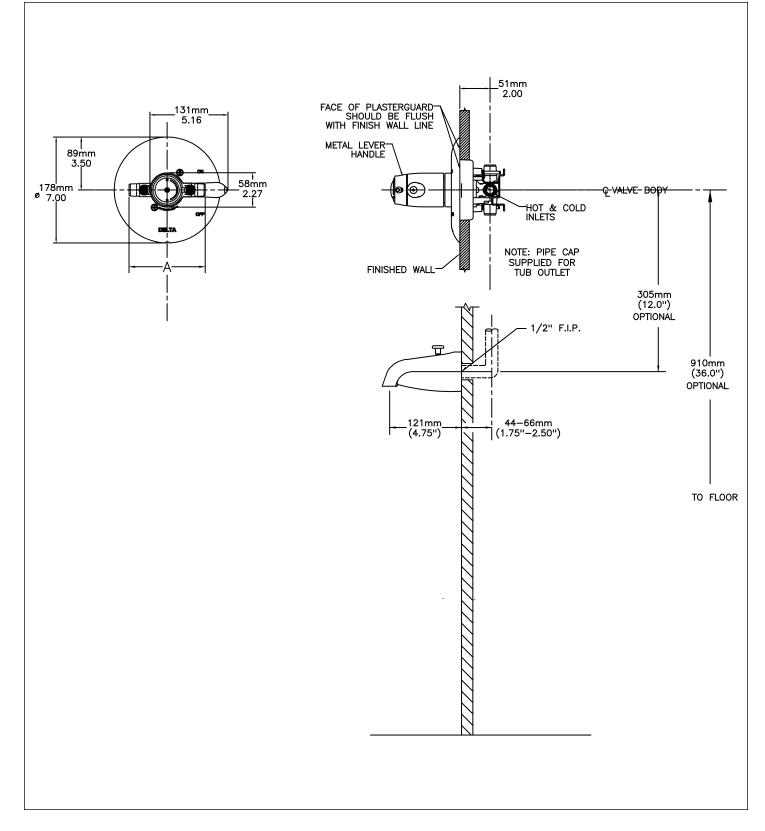

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced May 25, 2017.