
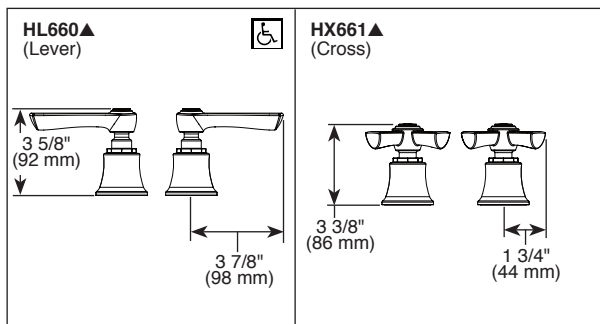


Submitted Model No.: _____

Specific Features: _____

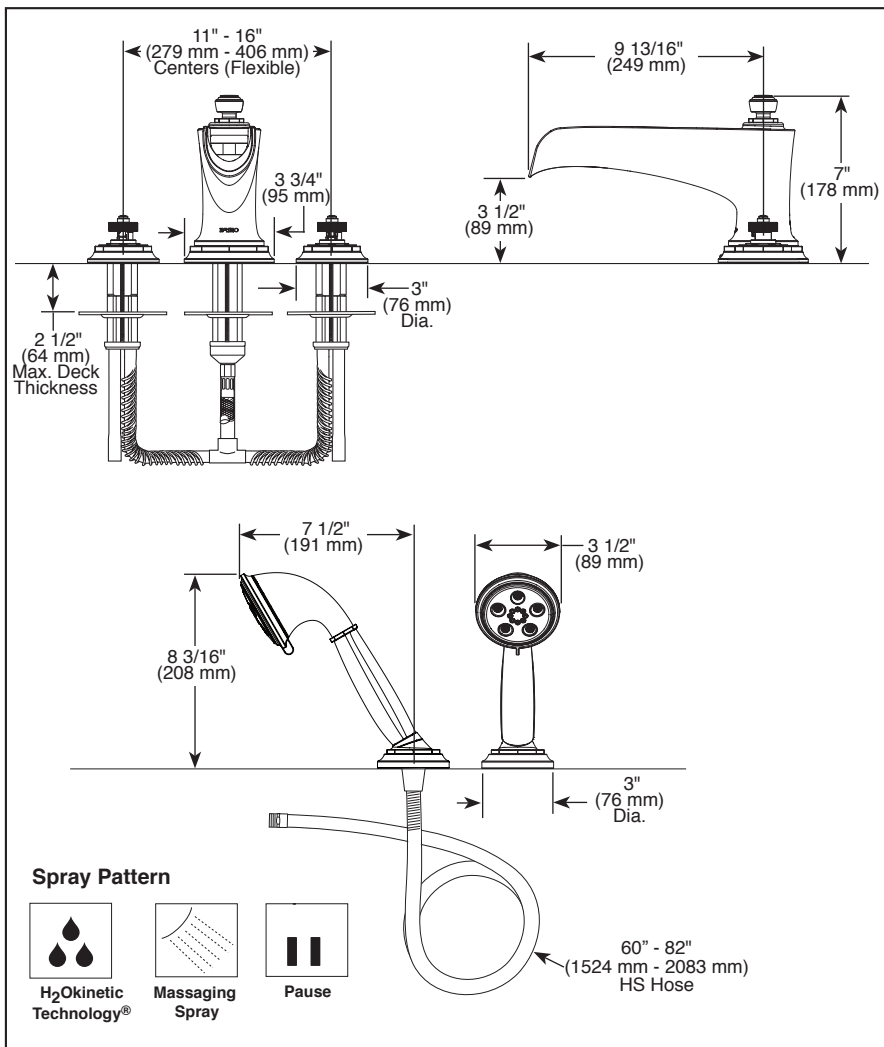

▲ Designate proper finish suffix

BRIZO®

ROMAN TUB FAUCET TRIM ONLY

- Rook™ Collection
- Three Hole Installation (T67361-LHP)
- Four Hole Installation (T67461-LHP)

FEATURES:

- H₂Okinetic Technology®
- Handles attach with rare earth magnets inside handles. No set screw required. Simplifies installation and provides flush mount installation.

STANDARD SPECIFICATIONS:

- Handshower maximum flow rate 2.00 gpm @ 80 psi, 7.60 L/min @ 552 kPa
- Trim only for two handle Roman Tub faucet for concealed mounting
- Channel spout
- Temperature and volume controlled with handles
- Rough-In kit sold separately (R64707 for four hole and R62707 for three hole)
- Multifunction handshower includes dual check valves for backflow prevention (T67461)
- Minimum 11" (279 mm) to maximum 16" (406 mm) distance between holes
- Handles sold separately (HL660 or HX661)
- 60" - 82" (1524 mm - 2083 mm) stretchable finished metal hose (T67461)

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1 - Valve control only
- EPA WaterSense® - Applies to handshower only - RP81079*

