



PERCY®
WALL MOUNT FAUCET



- Cast brass spout and side valves
- Ceramic disc valve cartridges
- Distinct, geometric handle design
- Lead Free — faucet contains $\leq 0.25\%$ total lead content by weighted volume
- Maximum flow rate: 1.5 gpm (5.7 L/min)
- Low flow rate: 1.2 gpm (4.5 L/min)

CODES AND STANDARDS
Meets or Exceeds ASME A112.18.1/
CSA B125.1/NSF 61/Section 9

EPA WaterSense® High Efficiency
Lavatory Faucet Specification

Certified Compliant with 0.25% Weighted
Average Lead Content Regulations

AVAILABLE FINISHES	FINISH CODE
Polished Chrome	100
Brushed Nickel	144



DESCRIPTION	PRODUCT NUMBER
Wall Mount Faucet 1.5 gpm (5.7 L/min) — Cross Handles — Lever Handles (ADA only)	D35105454.XXX D35105450.XXX
1.2 gpm (4.5 L/min) — Cross Handles — Lever Handles (ADA only)	D3510546C.XXX D3510545C.XXX
Dual Control Wall Mount Faucet Rough Valve (required component)	D35000450.191




ROUGH-IN DIAGRAM
SHOWN ON NEXT PAGE



PERCY®

WALL MOUNT FAUCET

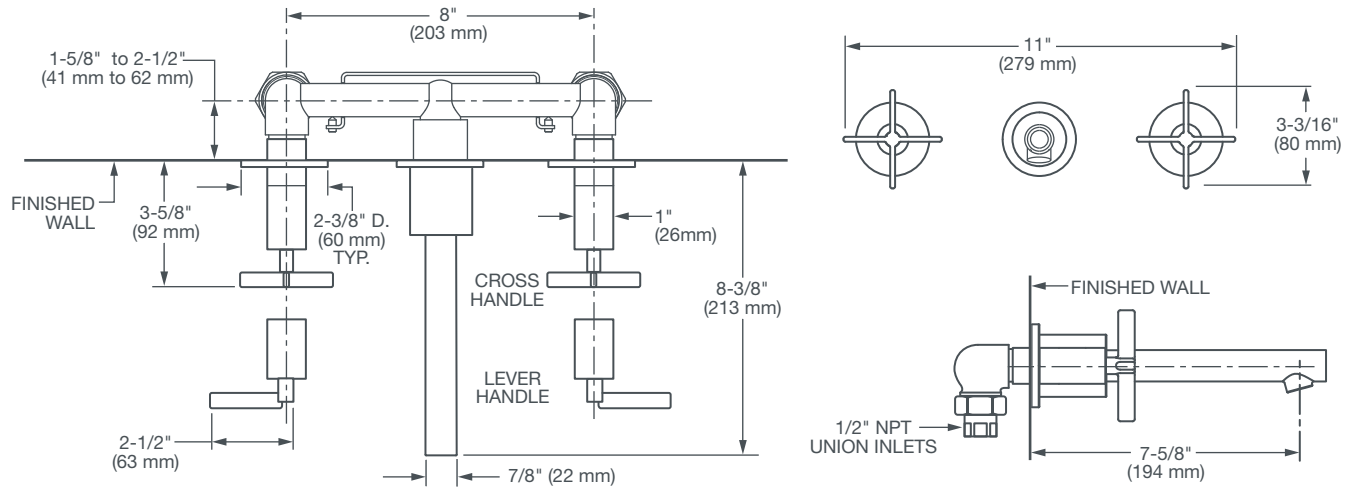

IMPORTANT: These measurements are subject to change or cancellation.
No responsibility is assumed for use of superseded or voided pages.

PART OF LIXIL