


INSTALLATION INSTRUCTIONS

Contemporary Cold Tap Model D35401700



Thank you for selecting DXV. To ensure that your installation proceeds smoothly, please read these instructions carefully before you begin.

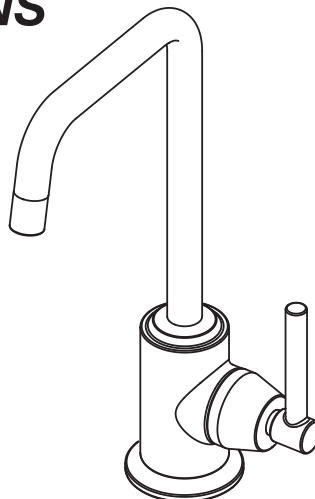

RECOMMENDED TOOLS AND MATERIALS

Most of the procedures require the use of common tools and materials, which are available from hardware and plumbing supply stores. It is essential that the tools and materials be on hand before work is begun.



Channel Locks



Adjustable Wrench




Basin Wrench



Plumbers' Putty or Caulking




Phillips Screwdriver



Flat Blade Screwdriver

ROUGHING-IN DIMENSIONS:

- For reference

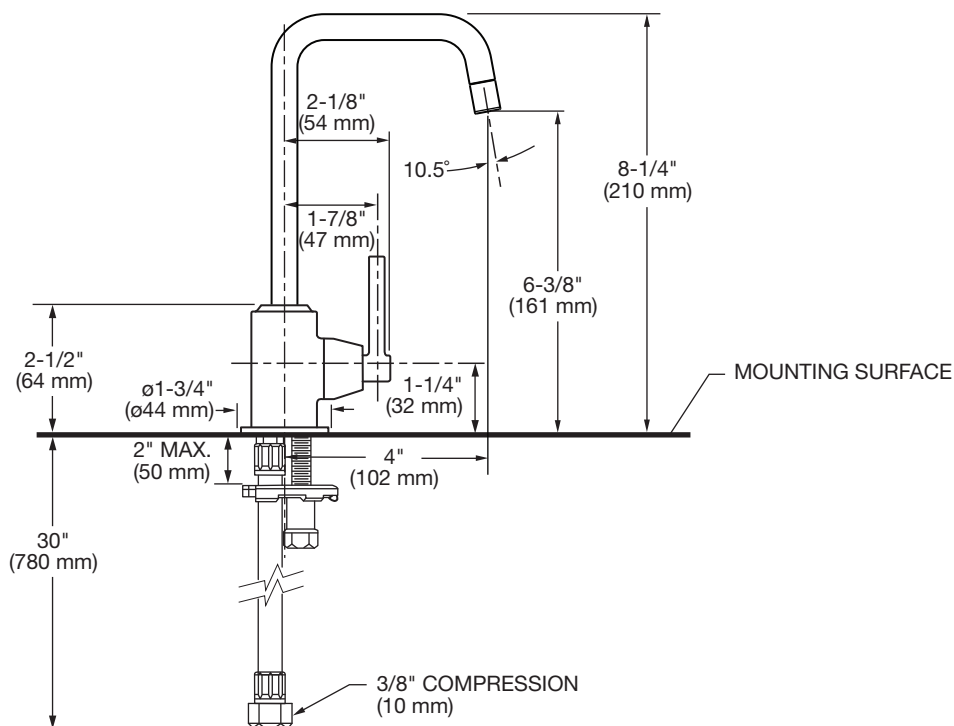

In the United States:

DXV
One Centennial Avenue
Piscataway, New Jersey 08855
Attention: Director of Customer Care

For residents of the United States, warranty information may also be obtained by calling the following toll free number: (800) 227-2734
www.DXV.com

In Canada:

DXV
5900 Avebury Road
Mississauga, Ontario
L5R 3M3
Canada

Toll Free: 1-800-387-0369
Local: 905-306-1093
Fax: 1-800-395-1498
www.DXV.ca

In Mexico:


DXV
Via Morelos 330
Col. Santa Clara Coatitla
Ecatepec, Estado de México 55540

Toll Free: 01-800-8391200
www.DXV.mx

1 INSTALL FITTING



CAUTION Turn off hot and cold water supplies before beginning.

- Install SEAL (1) in groove at bottom of faucet.
- Feed FLEXIBLE FAUCET SUPPLY (2) and SHANK (3) through the mounting hole of lavatory, or mounting surface.
- From below, Install "C" WASHER (4), and LOCKNUT (5) onto faucet SHANK (3). Before final tightening, adjust faucet so that it is centered and covers mounting hole. Tighten LOCKNUT (5) using a screwdriver or hex wrench.

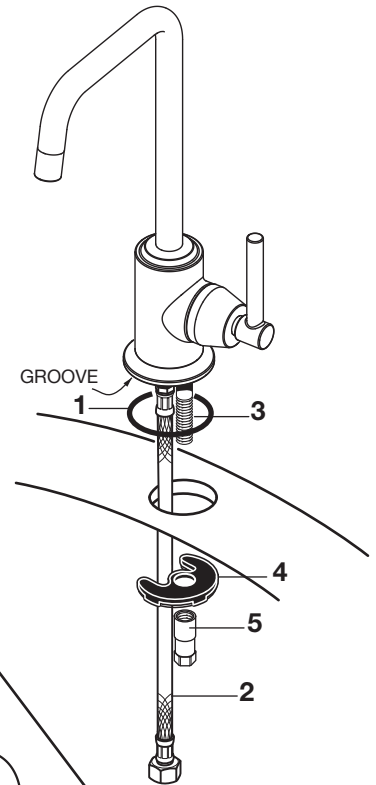

2 MAKE WATER SUPPLY CONNECTION

- Connect 3/8" WATER SUPPLY HOSE (1) to INLET WATER SUPPLY. Faucet supply is 30" (780 mm) in length. Loop supply if too long. If additional length is required, installer must provide adapters and supplies to connect to shut-off valve.
- Use adjustable wrench to tighten connections. **Figure A.**
- With FAUCET HANDLE (2) in OFF position, turn on WATER SUPPLY and check all connections for leaks.
- Install AERATOR RING (3) into faucet. **Figure B.**

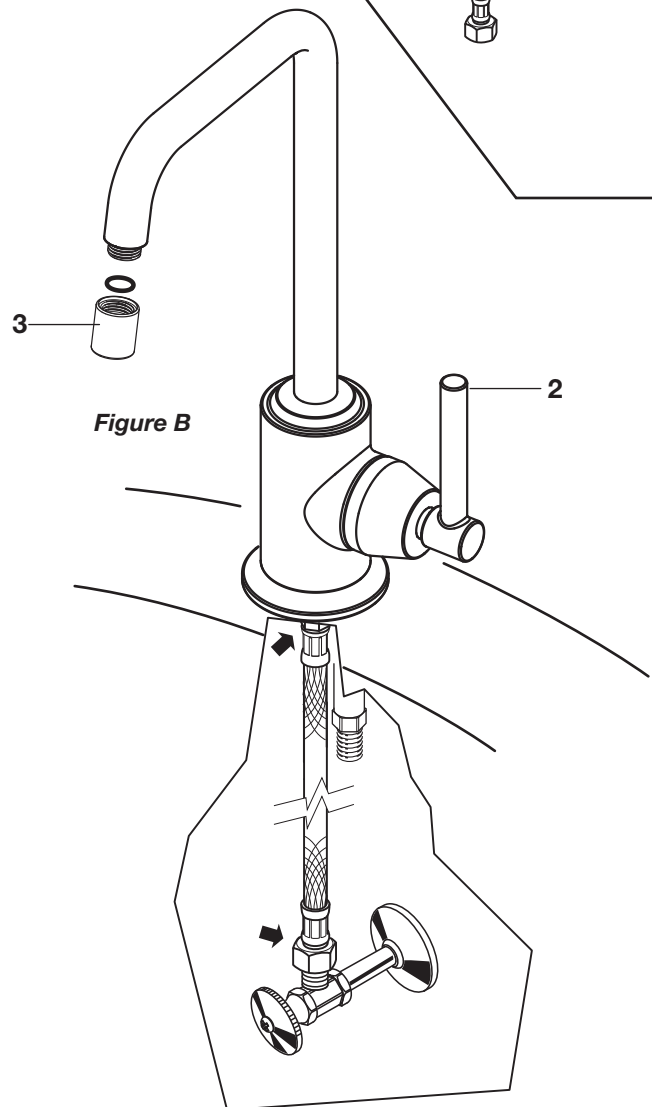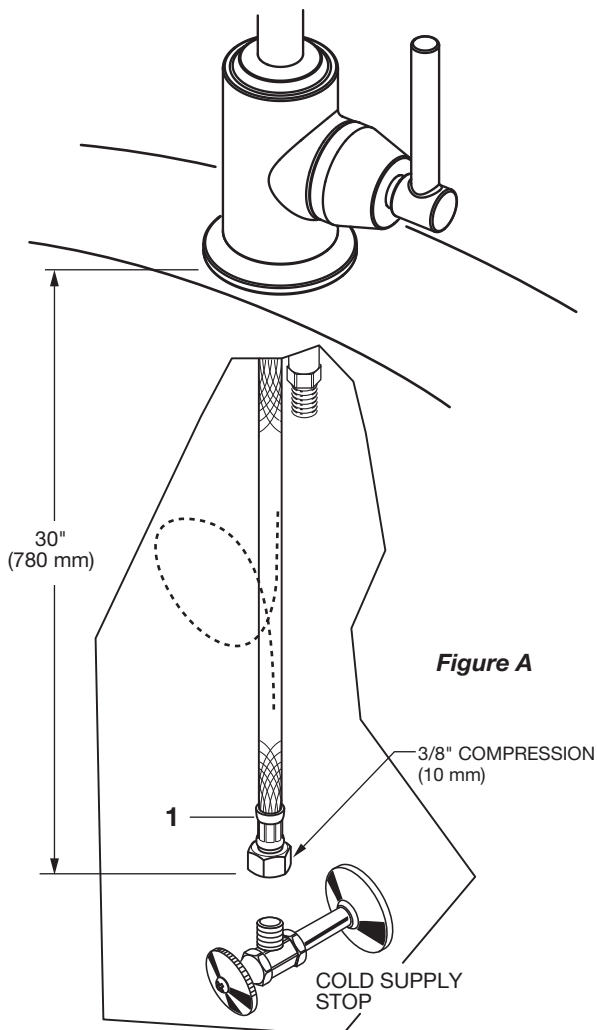

DXV

Contemporary Cold Tap

MODEL NUMBER

D35401700

Replace the “YYY” with
appropriate finish code

POLISHED CHROME	100
BRUSHED NICKEL	144
ULTRA STEEL	355

M964746-YYY0A
AERATOR ASSEMBLY

M964670-0070A
SWING SPOUT SEAL KIT

M964747-0070A
SPOUT SET SCREW KIT

H960104.191
CARTRIDGE

M964793-YYY0A
ESCUTCHEON KIT

M964762-YYY0A
LEVER HANDLE ASSEMBLY

M964794-0070A
SUPPLY HOSE KIT

M964507-0070A
MOUNTING KIT