

# Elkay Soft Sides Bi-Level Composite Fountain Non-Filtered Non-Refrigerated Freeze Resistant White Granite Composite

#### Model EDFPVR217RFPK

#### PRODUCT SPECIFICATIONS

Elkay Soft Sides® Bi-Level Composite Fountain Non-Filtered, Non-Refrigerated Freeze Resistant White Granite Composite. Features shall include Freeze Resistant. Furnished with Vandal-Resistant bubbler. Mechanical Front Bubbler Button activation. Product shall be Wall Mount (On-Wall), for Indoor/Outdoor applications, serving 2 station(s). Unit shall be lead-free design which is certified to NSF/ANSI 61 & 372 (lead free) and meets Federal and State low-lead requirements.

| Special Features:        | Freeze Resistant                |
|--------------------------|---------------------------------|
| Finish:                  | White Granite Composite (WHT)   |
| Power:                   | No Electrical Required          |
| Bubbler Style:           | Vandal-Resistant                |
| Activation by:           | Mechanical Front Bubbler Button |
| Mounting Type:           | Wall Mount (On-Wall)            |
| Chilling Option:         | Non-Refrigerated                |
| Dimensions (L x W x H):  | 38-1/2" x 18-11/16" x 20-3/8"   |
| Approx. Shipping Weight: | 118 lbs.                        |
| Installation Location:   | Indoor/Outdoor                  |
| No. of Stations Served:  | 2                               |

- Mechanically-Activated bubbler continues to supply water in event of service disruptions.
- With a contemporary look and smooth, rounded lines, these wall mounted drinking fountains are constructed of a premium composite, solid surface material.
- Vandal-resistant, bubblers are one-piece, chrome plated with integral hood guard design to prevent contamination from other users, airborne deposits and tampering.
- Freeze Resistant:
  - Depending on specific installation, freeze resistant system is located either below frost line or in temperature controlled space.





#### AMERICAN PRIDE. A LIFETIME TRADITION.

Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.



Included with Product: Fountain

Freeze Resistant Valve Assembly

**▼** Ships in multiple boxes.

#### PRODUCT COMPLIANCE

ADA & ICC A117.1 Buy American Act NSF/ANSI 61 & 372 (lead free)





Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards. Installation may require additional components and/or construction features to be fully compliant. Consult the local Authority Having Jurisdiction if necessary.


Installation Instructions (PDF) - 98428C Installation Instructions (PDF) - 97566C

Water Systems are warranted for 12 months from date of installation. Warranty pertains to drinking water applications only. Non-drinking water applications are not covered under warranty.

Warranty (PDF)

#### **OPTIONAL ACCESSORIES**

| EWF172 - WaterSentry VII Filter Kit (Coolers + Fountains) |  |
|---|--|
| MPW200 - In Wall Carrier (Bi-Level)                       |  |
| ACCESS12X38-5 - Access Panel                              |  |



In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



## Elkay Soft Sides Bi-Level Composite Fountain Non-Filtered Non-Refrigerated Freeze Resistant White Granite Composite

#### Model EDFPVR217RFPK

12-1/8"

#### **INSTALLER NOTE**

This drinking fountain is furnished with a bubbler and valve including all connecting fittings which are manufactured of completely lead free material. Shut off valve (not furnished) to accept 3/8" O.D. unplated copper tube.

#### OPERATION OF QUICK CONNECT FITTINGS 1/4" O.D. TUBE WATER INLET 3/8" O.D. TUBE CONNECT COLD WATER SUPPLY **BUILDING WATER** TUBE IS SECURED IN POSITION PUSH IN COLLET TO RELEASE TUBE SIMPLY PUSH IN TUBE TO ATTACH + 777/ PUSHING TUBE IN BEFORE PULLING IT OUT HELPS TO RELEASE TUBE NOTE : WATERF DIRECTION : WATERFLOR SERVICE STOP (NOT FURNISHED)

water flow.

WARNING: The free-resistant box must be installed on an

and the inside of the freeze resistant box above 50° F (10° C) can result in damage to the box which could result in unrestricted

12-1/8"

interior heated wall where the temperature does not drop below 50° F (10° C). The front of the box must have unobstructed air flow. Failure to maintain the interior wall temperature

#### Care and Maintenance of Elkay Composite Fountains

The premium composite fountain provides an extremely durable, nonporous surface with resists staining. Care is very simple. Routine cleaning with a soft sponge or cloth, or with water or non-abrasive aerosol foam cleaner, is all that is normally needed to give many years of trouble free service. Cleaners left standing on the fountain surface can dull the surface finish. Be certain to rinse all cleaning agents completely and polish with a soft cloth.

Harsh abrasive cleaners are not required and should not be used.

Mild abrasives such as liquid automotive cleaning compound or baking soda paste will remove simple scratches and stains. Cigarette burns can normally be removed without noticeable effect. Deeper scratcher or gouges can be corrected with fine grit sandpaper (240 grit then 400 grit) or a green scotchbrite™ pad.

To maintain or regain luster and make cleaning easier, periodic applications of automobile wax or like products will keep the finish looking like new.

38-1/2"

(978mm)

18-3/4" (476mm) (102mm)

(76mm)

5-1/8

(130mm)


FINISHED FLOOR

5-3/16" (132mm)

3'

(76mm)

5-1/8"

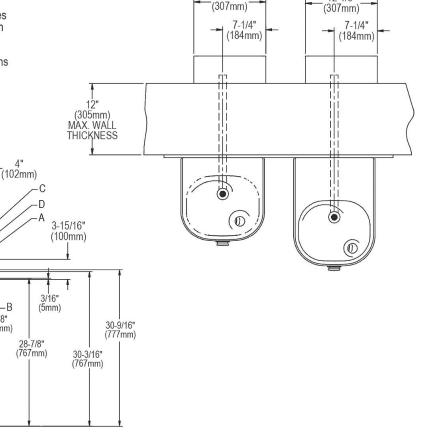

### LEGEND:

36-9/16" (929mm)

36-3/16

(920mm)

34-7/8" (886mm)

A = Recommended water supply location 3/8" O.D. unplated copper tube connect B = Recommended location for waste outlet 1-1/4" O.D. drain


C = Recommended location for operating cable 7/8" diameter hole

D = Mounting holes for securing fountain to wall (blocking & wall support is required in these areas for proper support of fountains)

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



# Elkay Soft Sides Bi-Level Composite Fountain Non-Filtered Non-Refrigerated Freeze Resistant White Granite Composite **Model EDFPVR217RFPK**

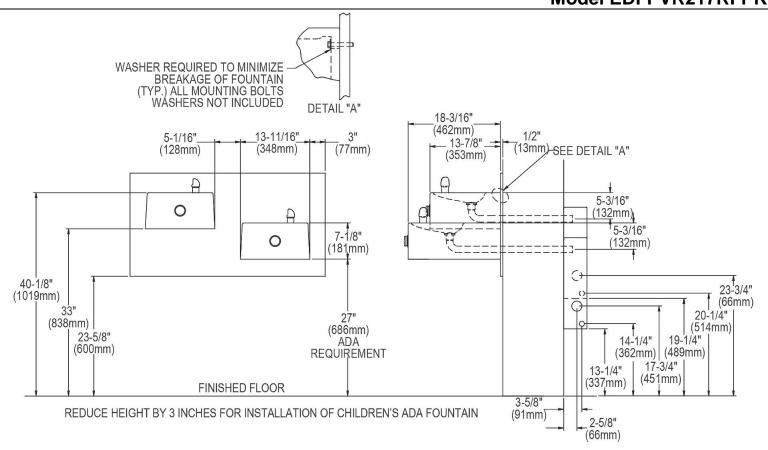

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.