# Elkay ezH2O Bottle Filling Station Surface Mount Non-Filtered Non-Refrigerated Stainless

**Model EZWSSM** 

## PRODUCT SPECIFICATIONS

Elkav ezH2O® Bottle Filling Station Surface Mount Non-Filtered Non-Refrigerated Stainless. Features shall include Antimicrobial\*, Green Ticker™, Hands Free, Laminar Flow, Real Drain. Electronic Bottle Filler Sensor activation. Product shall be Wall Mount (On Wall), for Indoor applications, serving 1 station(s). Unit shall be certified to UL 399 and CAN/CSA C22.2 No. 120.

3		
Special Features:	Antimicrobial, Green Ticker™, Hands	
	Free, Laminar Flow, Real Drain	
Finish:	Stainless Steel	
Power:	115V/60Hz	
Bubbler Style:	No Bubbler	
Activation by:	Electronic Bottle Filler Sensor	
Mounting Type:	Wall Mount (On Wall)	
Chilling Capacity:	Non-refrigerated	
Full Load Amps	1	
Rated Watts:	15	
Dimensions (L x W x H):	17-15/16" x 8-3/16" x 25-7/16"	
Approx. Shipping Weight:	32 lbs.	
Installation Location:	Indoor	
No. of Stations Served:	1	

Special Note: Able to pair with a remote chiller.

- Green Ticker: Informs user of number of 20 oz. plastic water bottles saved from waste.
- Laminar flow provides clean fill with minimal splash.
- Key plastic components are manufactured with silver ion antimicrobial agent helping to provide clean, stain- and odor-free surfaces.
- Real Drain System eliminates standing water.

\*Antimicrobial claims are in refence to components manufactured antimicrobial agents, helping to provide clean, stain- and odor-free surfaces.



Included with Product: **Bottle Filler (EZWSSM)** Ships in one box.

A Century of Tradition and Quality. For more than 100 years, Elkay has been making innovative products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.



### PRODUCT COMPLIANCE

ADA & ICC A117.1 CAN/CSA C22.2 No. 120 GreenSpec® NSF/ANSI 61 (Q≤1) & 372 (lead free) UL 399









Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards. Installation may require additional components and/or construction features to be fully compliant. Consult the local Authority Having Jurisdiction if necessary.

Installation Instructions (PDF) - 2000000494

Electrical components and water system are warranted for 12 months from date of installation. Warranty pertains to drinking water applications only. Non-drinking water applications are not covered under warranty.

Warranty (PDF)

PART:	QTY:
PROJECT:	
CONTACT:	
DATE:	
NOTES:	
APPROVAL:	

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



# Elkay ezH2O Bottle Filling Station Surface Mount Non-Filtered Non-Refrigerated Stainless

Model EZWSSM

Optional Accessories		
<u>EWF3000</u>	Elkay Universal Filtration Kit (3000-Gallon)  Spec Sheet (PDF)	
<u>ECH8</u>	Elkay Remote Chiller Non-Filtered Refrigerated 8 GPH  Spec Sheet (PDF)	

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

OPERATION OF QUICK CONNECT FITTINGS

in position

Simply push in | Tube is secured | Push in collet to tube to attach | in position | release tube

Pushing tube in before pulling it out helps to

release tube


## **IMPORTANT!**

**INSTALLATION NOTES:** 

Ensure wall is structurally sound to bear the loads imparted by the surface mount bottle filler.

### **ELECTRICAL**

Equipped with electrical cord and three-prong molded rubber plug for use with 15-amp minimum receptacle. Rated at 115V/60Hz, single phase.

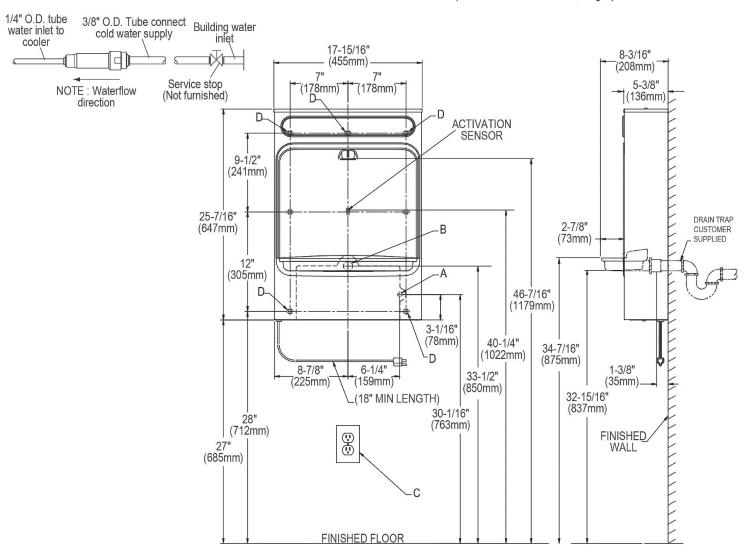

A = Recommended water supply location; 1/2" I.P.S. maximum pipe size. Service stop valve not furnished.
B = Recommended location for waste outlet 1-1/4" O.D. maximum pipe size.
C = Electrical outlet, three (3) conductor grounded. Locate within safe reach of power cord.

D = 7/16" X 3/4" orbound mounting holes for fastening backplate to wall

NOTE: New Installations Must Use Ground Fault Circuit Interrupter (GFCI). It is highly recommended that the circuit be dedicated and the load protection be sized for 20 amps.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.