

SUBMITTAL SHEET

8712-R Small Diameter Series

APOLLOXPRESS® Press End Copper/Brass Reducing Tee
Reducing Outlet CxCxF (N.P.T.) (¾" x ½" through 2" x ¾")



Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	

APOLLOXPRESS
YOUR SINGLE SOURCE SOLUTION FOR PRESS TECHNOLOGY



DESCRIPTION

The APOLLOXPRESS® 8712-R Small Diameter Press Reducing Outlet Tee features a Lead-Free dezincification resistant copper body and an EPDM O-Ring. Our Small Diameter APOLLOXPRESS® products are manufactured utilizing proven ASTM materials and standards. Proudly Made In The USA.

FEATURES

- Lead-Free Construction
- Leak-Before-Press Technology
- Female N.P.T. per ANSI/ASME B1.20.1
- Compatible with Pro-Press™ Pressing Tools
- Approved for underground installation (per local installation code)
- Use with hard/soft ASTM B88 K, L & M Copper Tube
- Made in USA
- cUPC® Compliant
- ARRA Compliant

PERFORMANCE RATING

- Maximum Pressure: 200 psi
- Temperature Range: 0°F to 250°F depending on application. Hot Water up to 250°F, Chilled Water down to 33°F

APPROVALS

- NSF/ANSI NSF 61 – Water Quality
- NSF/ANSI NSF-372 – Lead Free (LF)
- IAPMO File Listings: 4861, 6174 & N-4951

APOLLOXPRESS

- Small Diameter Sizes ¾" x ½" through 2" x ¾"
- Model 8712-R, Reducing Outlet Tee CxCxF (N.P.T.)

STANDARD MATERIALS

Part Name	Material
Body	UNS C12200 Copper
Outlet Body	UNS C27451 Brass
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed

DIMENSIONS

Item No.	Description	Dimension (in.)										(lb.)
		A	B	C*	D**	E*	F**	G**	Height	Width	Depth	
10066581	8712 ¾"x½"x½" CxCxF	3.13	3.01	0.92	0.65	0.92	0.65	2.39	3.01	3.13	1.24	0.36
10066582	8712 1x1x½" CxCxF	3.67	3.35	0.98	0.86	0.98	0.86	2.61	3.35	3.67	1.50	0.46
10066583	8712 1x1x½" CxCxF	3.67	3.42	0.98	0.86	0.98	0.86	2.67	3.42	3.67	1.50	0.54
10066584	8712 1½x1½x½" CxCxF	4.12	4.04	1.09	0.98	1.09	0.98	3.16	4.04	4.12	1.75	0.74
10066855	8712 1½x1½x¾" CxCxF	4.12	4.10	1.09	0.98	1.09	0.98	3.23	4.10	4.12	1.75	0.78
10066856	8712 1½x1½x¾" CxCxF	4.00	4.01	1.31	0.69	1.31	0.69	2.96	4.01	4.00	2.11	0.92
10066587	8712 1½x1½x¾" CxCxF	4.00	4.08	1.31	0.69	1.31	0.69	3.02	4.08	4.00	2.11	0.96
10066588	8712 2x2x¾" CxCxF	4.39	4.57	1.59	0.61	1.59	0.61	3.30	4.57	4.39	2.58	1.95
10066589	8712 2x2x¾" CxCxF	4.39	4.64	1.59	0.61	1.59	0.61	3.36	4.64	4.39	2.58	1.40


* Tolerance +/- .05"

** Tolerance +.09 / -.03

Elkhart Products Corporation

1255 Oak Street, Elkhart, IN 46514

www.elkhartproducts.com | (574) 264-3181

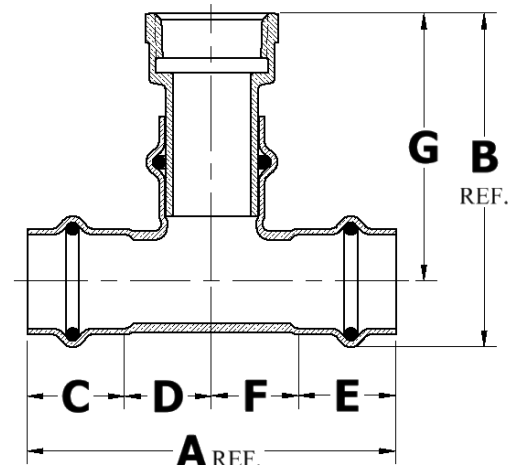

This specification is provided for reference only. Elkhart Products Corporation reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to Elkhart products previously or subsequently sold.