



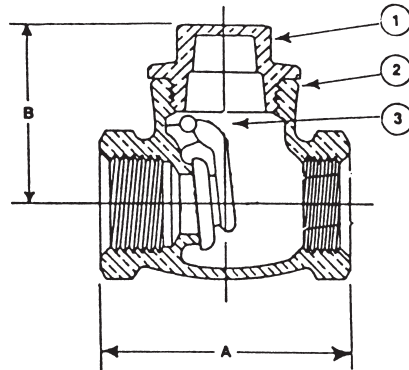

967 Threaded

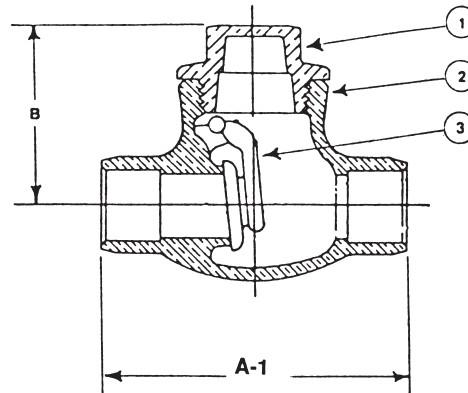

968 Solder

Dimensions				
Units	Size	A	A-1	B
Inches	1/2	1.86	2.18	1.35
mm		47	55	34
Inches	3/4	2.11	2.85	1.53
mm		54	72	39
Inches	1	2.52	3.46	1.74
mm		64	88	44
Inches	1 1/4	2.72	3.70	1.99
mm		69	94	51
Inches	1 1/2	3.23	4.33	2.28
mm		82	110	58
Inches	2	3.70	5.12	2.48
mm		94	130	63
Inches	2 1/2	5.20		3.11
mm		132		79
Inches	3	5.83		3.81
mm		148		97
Inches	4	6.89		4.21
mm		175		107

MATERIAL SPECIFICATION			
1	CAP	FORGED BRASS	ASTM B283, C37700
		CAST BRASS	ASTM B584, C85700
2	BODY	FORGED BRASS	ASTM B283, C37700
		CAST BRASS	ASTM B584, C85700
3	DISC	FORGED BRASS	ASTM B283, C37700
		CAST BRASS	ASTM B584, C85700

Rev. 6

RATING

- 200 PSI NON-SHOCK

Warning: DO NOT USE
for reciprocating air compressor
service.

FEATURES

- BRASS BODY
- THREADED OR
SOLDER ENDS
- THREADED BONNET
- INTEGRAL SEAT
- BRASS DISC
- 100% FACTORY TESTED
- INTERNATIONAL

The information presented on this sheet is correct at the time of publication. Hammond Valve reserves the right to change design, and/or material specifications without notice. For the Installation, Operation and Maintenance Manual (IOM) see the engineering section on our website. For the most current information access www.hammondvalve.com

Hammond Valve is a registered trade mark of Milwaukee Valve Company.