

#### Features \_\_\_\_\_

- 1.28 Gpf / 4.86 Lpf
- SmartFasten™ 3-bolt tank-to-bowl connection
- Round front bowl
- PuraClean™ easy-to-clean glaze
- Decorative metal trip lever
- High performance MagnaFlush™ flushing technology
- 3" flush valve
- Pilot operated anti-siphon fill valve
- 12" rough-in
- 2" glazed trapway
- The Mansfield® limited lifetime warranty on china; Five-year limited warranty on tank trim
- Available in white and standard colors: biscuit and bone





Also available as a complete toilet kit.\*

# Components \_\_\_\_\_

Model #	Description	Codes/Standards	
380-387	Round front, two-piece toilet. Less toilet seat and supply. Specify color.		
380	Round front toilet bowl only. Less toilet seat. Specify color.	HET CONSTRUCT OUET	
387	Tank and cover only, with left hand, front-mount, chrome-plated, metal trip lever. Less supply. Specify color.	C ®	

#### Other Options:

other options.				
387RH	Same as 387, with right hand trip lever.			
387LT	Same as 387, with tank liner.	HIGH EFFICIENCY TOILET		
*4381CTK	Round front, complete toilet kit. Includes slow close toilet seat, tank and bowl, flange bolts, wax ring with polyethylene flange and instructions.	HET DE		
*4381LTCTK	Same as 4381CTK, with tank liner.			






## **Specifications**

Model #	Description	Codes/Standards	
380-387	Round front, (1.28 gpf / 4.86 lpf) two-piece toilet	HIGH EFFICIENCY TOLET  TOLET	

Specification	Description	Specification	Description
Material	Vitreous china	Trap Diameter	2"
Water Pressure Range	20 to 80 PSI	Trap Seal	2-3/8"
MaP Rating	1000 grams	Rough-in	12"
Water Usage	1.28 gpf / 4.86 lpf	Shipping Weight	Model 380 - 49 lbs.
Water Surface Area	8" x 9"		Model 387 - 36 lbs. Model 4381CTK - 91 lbs.
Flush System	3" flush valve - MagnaFlush™ flushing technology	Warranty	Vitreous China - Limited Lifetime Tank Trim - Limited Five Year

### **Technical Information**

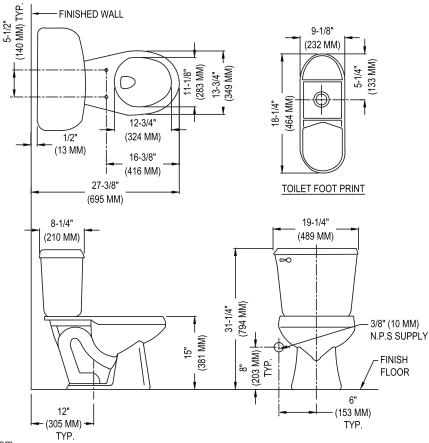

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

These dimensions are nominal and subject to change without notice.

Fixture performance and specifications meet or exceed ASME A112.19.2-2008/CSA B45.1-08 standards, and other state and local codes.

