

4148-3148 Brentwood® HET

Elongated Front, SmartHeight™, Vitreous China, Two-Piece Toilet



Features

- Concealed trapway
- 1.28 Gpf / 4.86 Lpf low water consumption
- Uses 20% less water than conventional toilets
- Elongated front, SmartHeight™ (16-1/2" high bowl)
- Complies with ADA requirements for accessibility
- High performance MagnaFlush™ flushing technology
- 3" flush valve
- Pilot operated anti-siphon fill valve
- Chrome-plated trip lever
- 2" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White and Standard Colors: Biscuit
- WaterSense compliant, certification pending



Elongated Front



Model 4148-3148
with concealed trapway
Toilet seat not included

Components

Model #	Description	Codes/Standards
4148-3148	Elongated front, SmartHeight™ two-piece toilet. Less toilet seat and supply. Specify color.	   
4148	Elongated front, SmartHeight™ toilet bowl only. Specify color.	
3148	Tank and cover only, with front mount, chrome-plated trip lever. Less supply. Specify color.	
SB700	Elongated, SmartClose™ toilet seat. Specify color.	

4148-3148 Brentwood® HET

Elongated Front, SmartHeight™, Vitreous China, Two-Piece Toilet




Specifications

Model #	Description	Codes/Standards
4148-3148	Elongated front (1.28 gpf/4.86 lpf) two-piece toilet	HET ADA

Specification	Description	Specification	Description
Material	Vitreous China	Trap Diameter	2-1/4"
Water Pressure Range	20 to 80 PSI	Trap Seal	2-1/2"
Flush System	3" flush valve - MagnaFlush™ Flushing Technology	Rough-in	12"
Water Usage	1.28 gpf / 4.86 lpf	Shipping Weight	Model 4148 - 51.6 lbs. (23.4 kg)
Water Surface Area	7" X 9-1/4"		Model 3148 - 38.8 lbs. (17.6 kg)
MaP Rating	800 grams	Warranty	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

Technical Information

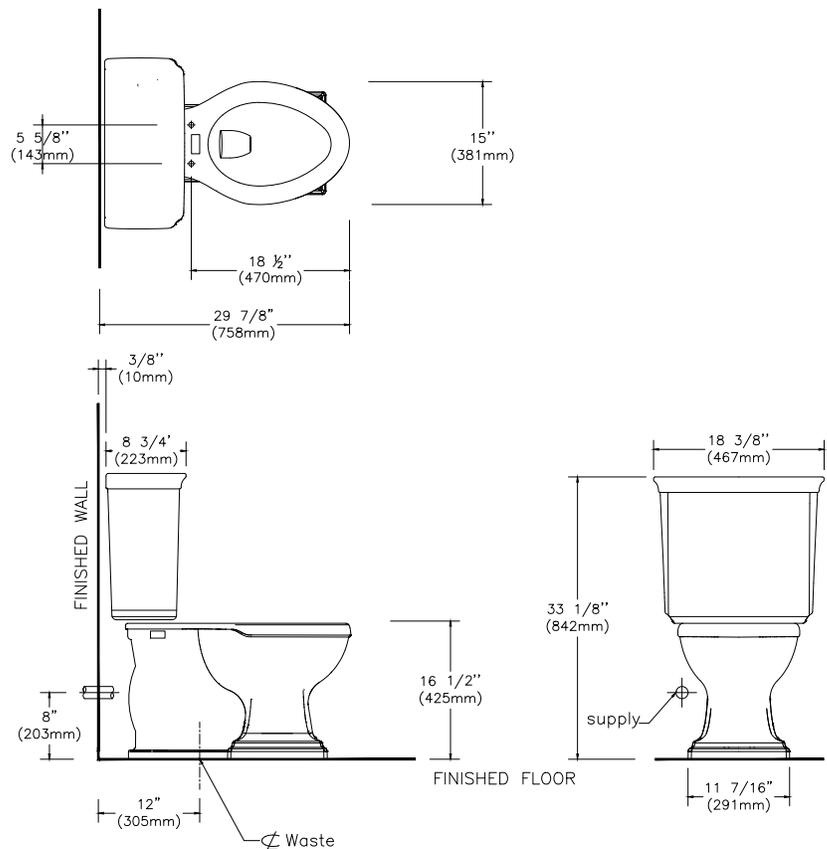

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

These dimensions are nominal and subject to change without notice.

Fixture performance and specifications meet or exceed ASME A112.19.2-2008/CSA B45.1-08 standards, and other state and local codes.