
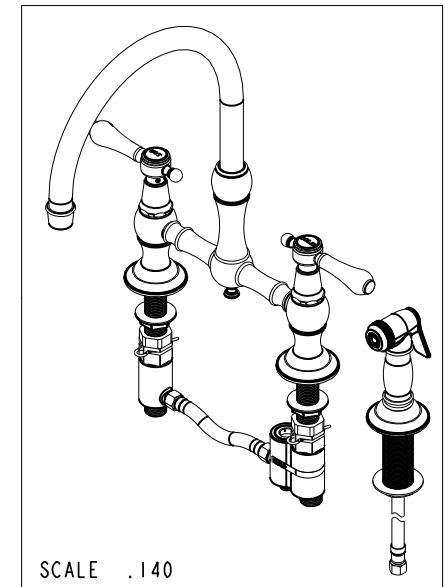


2. TRIM 3/8" OF SPLIT RING AND PLACE BETWEEN SPOUT AND BODY.
3. APPLY THIN COAT OF SILICON GREASE ON O-RINGS.
4. APPLY LOCTITE 242.
5. COLD HANDLE ASSY (ITEM 12) AND BLUE DYKEM LEG OF BRIDGE B ARE LOCATED ON THE SAME SIDE.
6. APPLY LOCTITE 242 IF SCREW DOES NOT HAVE NYLON PATCH.

ITEM	PT/ASSY	DESCRIPTION	TYPE	QTY.
1	3-522	KITCHEN BRIDGE BODY ASM, SIDE SPRAY	ASSEMBLY	1
2	91061	FLANGE NUT 1/2-14 NPSM	PART	2
3	1-152	SEAT ASSY, UPPER	ASSEMBLY	2
4	2-472	DIVERter ASSY, BRIDGE FAUCET	ASSEMBLY	1
5	129	KITCHEN SPRAY HEAD	ASSEMBLY	1
6	91111	SPLIT RING 3/4 X 1 NYLON	PART	1
7	3-525	SPOUT ASSEMBLY	ASSEMBLY	1
8	12259	HANDLE BONNET - TUB FILLER	PART	2
9	2-134	HANDLE ASSEMBLY - HOT	ASSEMBLY	1
10	2-133	HANDLE ASSEMBLY - COLD	ASSEMBLY	1
11	10159	HEX KEY, 3/32 ALLOY STEEL	PART	1

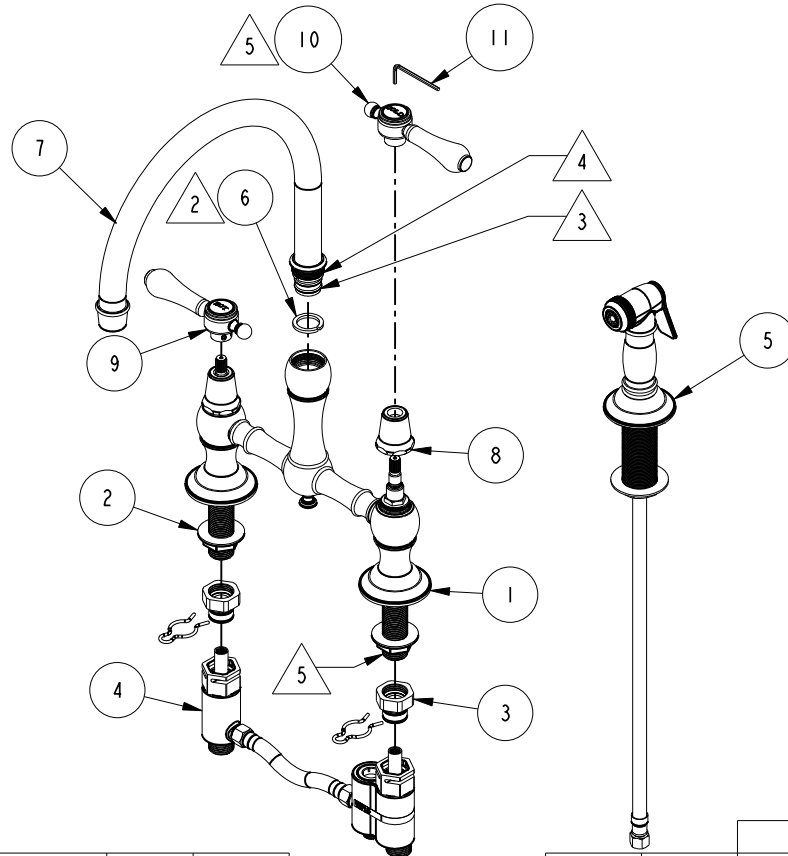

-	D	EN-3675	08/02/18	C.G.
-	C	EN-3612	05/23/18	JM
-	B	EN-2909	06/19/17	AN
-	A	EN-3039c	05/24/16	AN
-	-	EN-2744	12/11/14	AN
ZONE	REV	DESCRIPTION	DATE	APPROVED


COPYRIGHT 2005 BRASSTECH, INC.
THESE DRAWINGS AND THE DESIGNS
DEPICTED HEREIN ARE THE PROPRIETARY
PROPERTY OF BRASSTECH. ANY USE
OR REPRODUCTION IS SUBJECT TO
THE EXPRESS APPROVAL OF BRASSTECH.
UNAUTHORIZED USE IS STRICTLY
PROHIBITED. ALL RIGHTS RESERVED.

		-	-
TESTING	-	-	-
ASSEMBLY	-	-	-
PLATING	-	-	-
POLISHING	-	NEXT ASSY	USED ON
MACHINING	-	APPLICATION	
TOOLING FIXTURE #		REMOVE ALL BURRS AND SHARP EDGES	

UNITS ARE: INCHES [MM]		
TOLERANCES ARE:		
FRACTIONS DECIMALS		ANGLES
±1/16"		±1°
.XX ±.1 [2,5]		
.XX ±.06 [1,5]		
(X.XXX) DENOTES CRITICAL DIMS.		
ALL THREADS ARE CRITICAL		
DRAWN	AN	05/24/16
CHECKED	AN	05/24/16
APPROVED	AN	05/24/16

BRASSTECH INCORPORATED	2001 CARNEGIE AVE SANTA ANA, CA 92705 (949) 417-5207
KITCHEN BRIDGE FAUCET W/ SIDE SPRAY	

DWG NO.	9458	REV	D
SCALE	1/60	REF. -	SHEET 1 OF 2

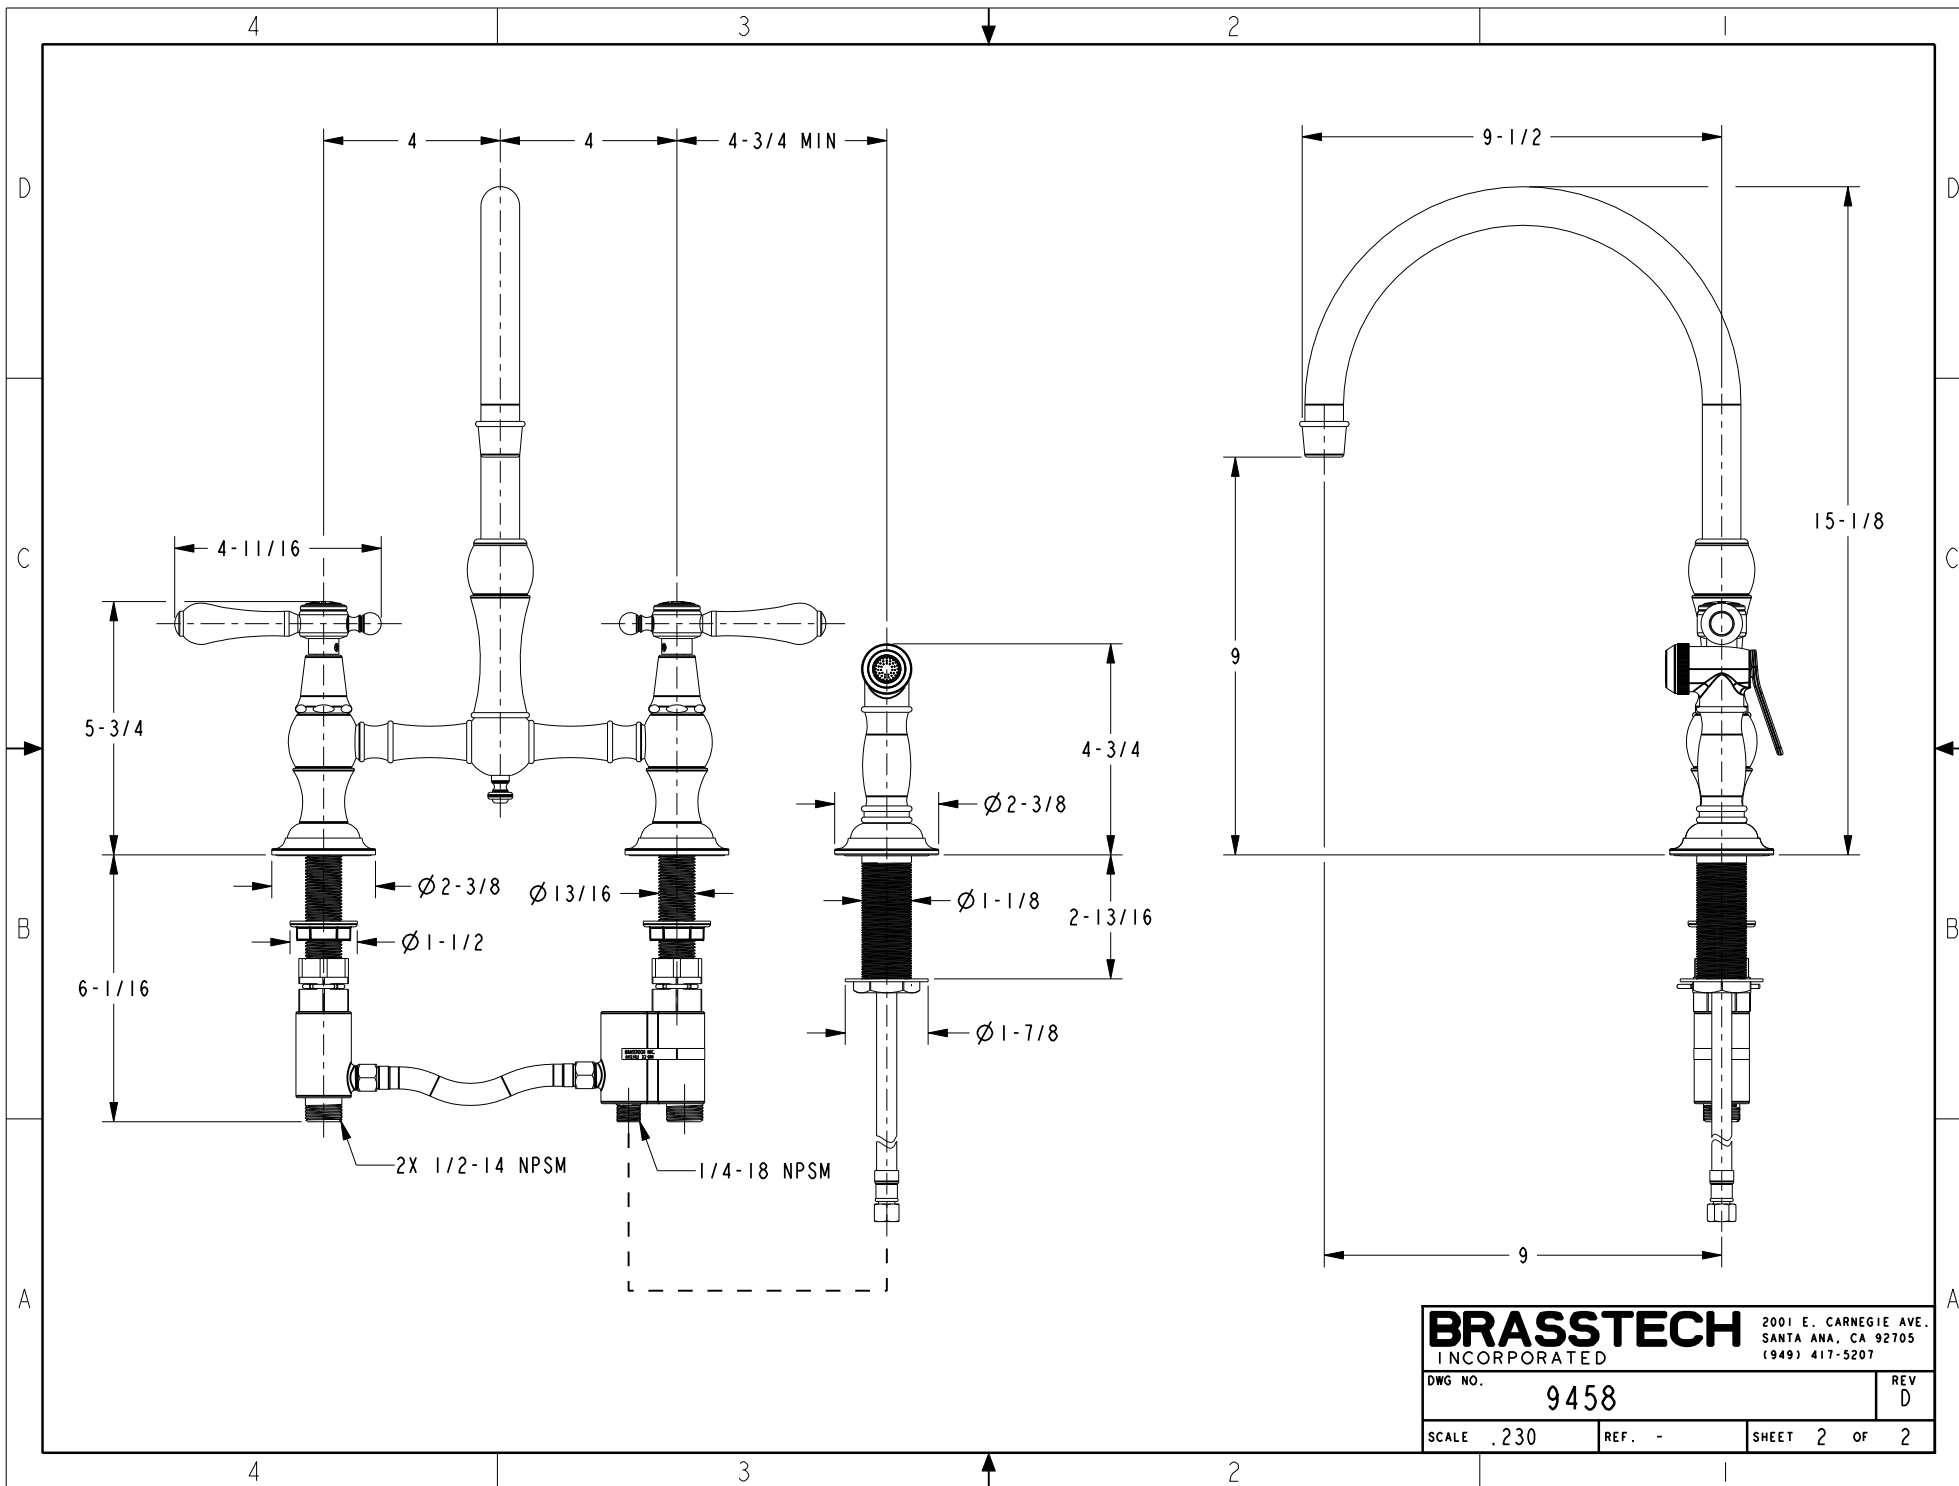

BRASSTECH INCORPORATED		2001 E. CARNEGIE AVE. SANTA ANA, CA 92705 (949) 417-5207	
DWG NO.	9458	REV	D
SCALE	.230	REF.	-
SHEET	2	OF	2