

Access Risers – Ultra-Rib™

Applications

Orenco's Access Risers provide access to septic tank openings and can be cast into the tops of concrete tanks, bonded in place, or bolted down using a riser tank adaptor. They can also be used as valve enclosures.




General

Orenco Ultra-Rib™ Access Risers are constructed of ribbed PVC pipe and are available in 12-, 18-, 21-, and 24-in. diameters. They can be ordered in 3-in. (76.2-mm) increments in lengths up to 13 ft (3.96 m) for 12- and 18-in. diameter risers, and up to 14 ft (4.27 m) for 21- and 24-in. diameter risers. Orenco Ultra-Rib riser pipe is also available in truckload quantities. A complete line of Orenco pipe-cutting tools makes it easy to fabricate risers in your shop or in the field.

Standard Models

RR12XX, RU18XX, RR21XX, RR24XX

Product Code Diagram

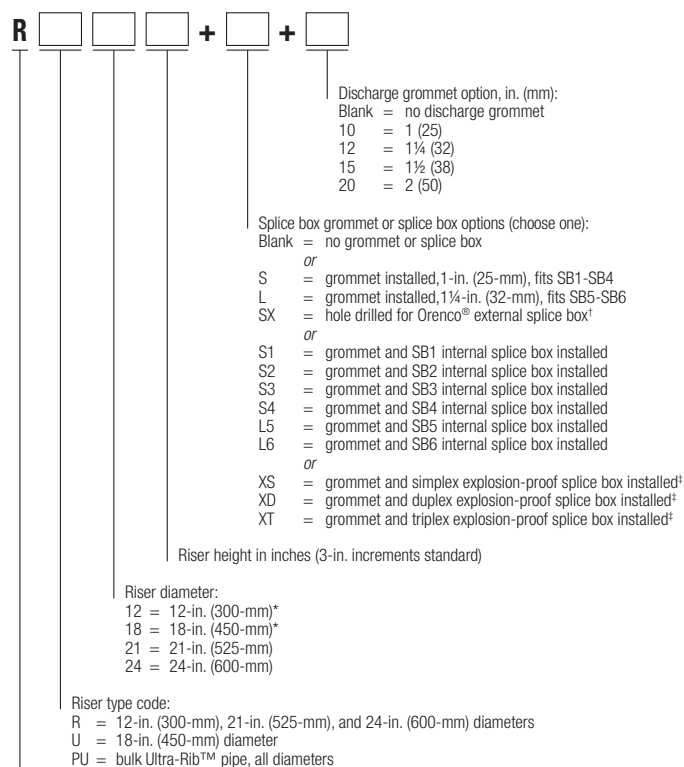

Materials of Construction

Ultra-Rib™ PVC Pipe: PVC

Specifications

Model	RR12XX	RU18XX	RR21XX	RR24XX
I.D., in. (mm)	11.74 (298)	17.65 (448)	20.50 (521)	23.50 (597)
Wall Thickness - excluding ribs, in. (mm)	0.10 (3)	0.19 (5)	0.25 (6)	0.25 (6)
O.D. - including ribs, in. (mm)	13.13 (334)	19.44 (494)	22.63 (575)	25.63 (651)
Weight, lbs per ft (kg per m)	5 (7.4)	11 (16.4)	15 (22.3)	19 (28.3)