


# Fiberglass Caps

## Applications

Orenco's Fiberglass Caps are used as access covers for valve boxes and tank hatches. These lids are rated for pedestrian traffic only.

- FL8 caps fit 8-inch dia. IPS pipe, 8.63-inch (219 mm) O.D.
- FL12 caps fit 12-inch dia. PIP pipe, 12.24-inch (311 mm) O.D.
- FL12GTU caps fit 12-inch dia. Ultra-Rib™ pipe, 13.1-inch (333 mm) O.D.
- FL15 caps fit 15-inch dia. PIP pipe, 15.3-inch (389 mm) O.D.

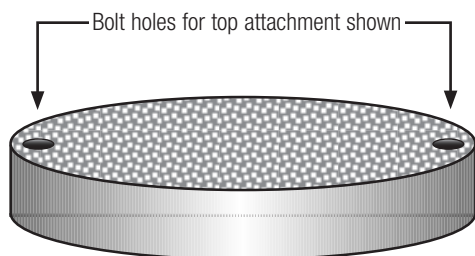

## General

Orenco Fiberglass Caps are molded using fiberglass reinforced polyester resin. Both non-skid (standard) and smooth surfaces are available. Standard color for the non-skid surface is green. Standard color for the smooth surface is white. Fiberglass caps are available with or without bolt holes and gaskets.


## Standard Models

FL8G, FL8GT, FL8GS

FL12G, FL12GT, FL12GS, FL12GTU

FL15G, FL15GT, FL15GS

## Product Code Diagram

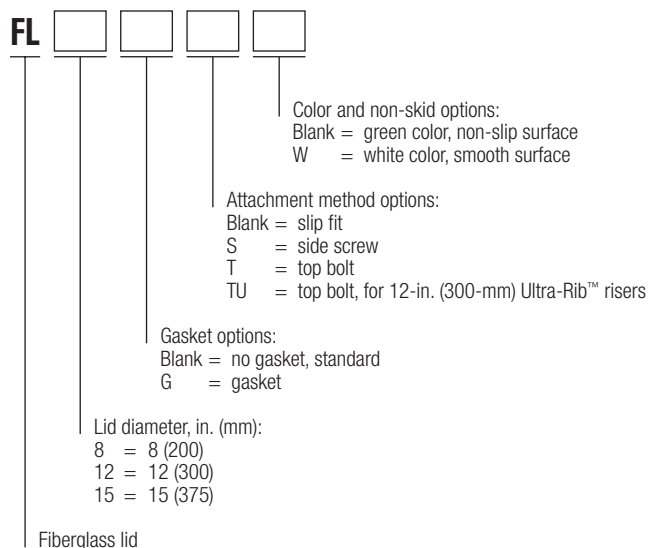

## Materials of Construction

|        |              |
|--------|--------------|
| Lid    | Fiberglass   |
| Gasket | Polyurethane |

## Specifications

| Dimensions             | FL8XX       | FL12XX       | FL12GTU      | FL15XX       |
|------------------------|-------------|--------------|--------------|--------------|
| O.D. in. (mm)          | 8 7/8 (225) | 12 1/2 (318) | 13 3/4 (349) | 15 5/8 (397) |
| I.D. in. (mm)          | 8 5/8 (219) | 12 1/4 (311) | 13 3/8 (339) | 15 3/8 (391) |
| Top thickness in. (mm) | 3/16 (4.8)  | 3/16 (4.8)   | 3/16 (4.8)   | 3/16 (4.8)   |
| Lip thickness in. (mm) | 1/8 (3.2)   | 1/8 (3.2)    | 1/8 (3.2)    | 3/16 (4.8)   |