

ENGINEERING EXCELLENCE

Legacy Series #2LG250

SPECIFICATION SHEET

DESCRIPTION

- Single Handle Kitchen Pull-Down Faucet
- Metal Lever Handle
- Pull-Down Head with 2 Spray Patterns Swivel 360°
- 8-1/2" Reach, 8" from Deck to
- Ceramic Disc Cartridge with Temperature Limit Stop
- 1 or 3 Hole 8" Installation
- Easy-Install 30" Flex Supply Lines With 3/8" Connections

STANDARDS APPLICABLE

- ASME A112.18.1
- ANSI A117.1
- ANSI / NSF 61, SECTION 9
- CUPC / IAPMO LISTED / ADA **COMPLIANT**
- CONTAINS NO MORE THAN 0.25% WEIGHTED AVERAGE LEAD CONTENT

FINISHES

- PC PVD Polished Chrome
- BN PVD Brushed Nickel
- SS PVD Stainless Steel
- PB **PVD Polished Brass**
- ORB Oil Rubbed Bronze



#2LG250 SHOWN * ADA



FLOW

Pull-Down Spray Head Limited to 1.8 GPM

| Model #: | | | |
|--------------------|--|--|--|
| | | | |
| Specific Features: | | | |

Submitted For:

Project Name:

| #21 G250 Single Handle Kitchen Pull-Down Equicet | Model | Description | | Finishes | |
|--|---------|--|------|----------|--|
| Single Hariate Kitchert on Bown added | #2LG250 | Single Handle Kitchen Pull-Down Faucet | o PC | o Other | |




ENGINEERING EXCELLENCE

Pioneer:1-800-338-9468 Commerce, CA 90040 www.pioneerind.com Pioneer Industries, Inc. © 2013 DMSP2LG250/REV. 12 2012 Page 1 of 2

Installation Note:

Faucet Hole Size :- 1-1/2"
Maximum Deck Thickness:- 2"

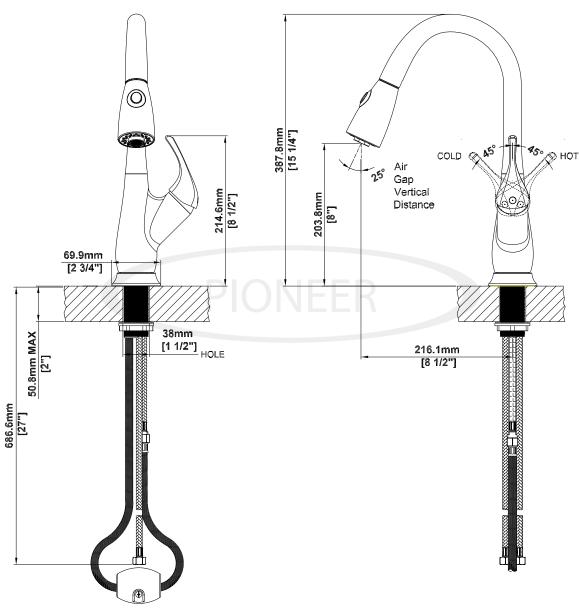

Product Diagram



DMSP2LG250/REV. 12 2012 Page 2 of 2

Pioneer:1-800-338-9468 Commerce, CA 90040 www.pioneerind.com Pioneer Industries, Inc. © 2013