

PARTS BREAKDOWN SHEET



i2 SINGLE HANDLE LAVATORY FAUCET



Model #: _____

Specific Features: _____

Project Name: _____

Submitted For: _____

Date: _____

- Lever Handle
- 4-3/4" Reach, 2-1/2" From Deck to Aerator
- Ceramic Disc Cartridge
- 1-Hole Installation
- 50/50 Pop-Up Drain Assembly
- Easy-Install 18" Flex Supply Lines With 3/8" Connections
- With 1.5 GPM Flow Rate

L-6050 SHOWN **ADA**

Model #	Features	Finish	
L-6050*		CP	
L-6050-BN*		PVD BN	
L-6050B	Builder Tract Pack	CP	
L-6050B-BN	Builder Tract Pack	PVD BN	

* Aerator limited to 1.5 GPM Flow Rate

Olympia products are engineered and manufactured to meet the following standards and codes:


ASME A112.18.1

ANSI A117.1

ANSI / NSF 61, SECTION 9

CONTAINS NO MORE THAN 0.25% WEIGHTED AVERAGE LEAD CONTENT

ITEM #	DESCRIPTION
A OP-130001*	Lever Handle
B OP-430021*	Cap
C OP-430022	Retainer Nut
D OP-390003	Ceramic Disc Cartridge
E OP-430024*	Aerator
F OP-430025	Washer
G OP-530005	Mounting Kit
H OP-630005*	50/50 Pop-Up Drain Assembly
1 OP-490029	3/32" Allen Screw

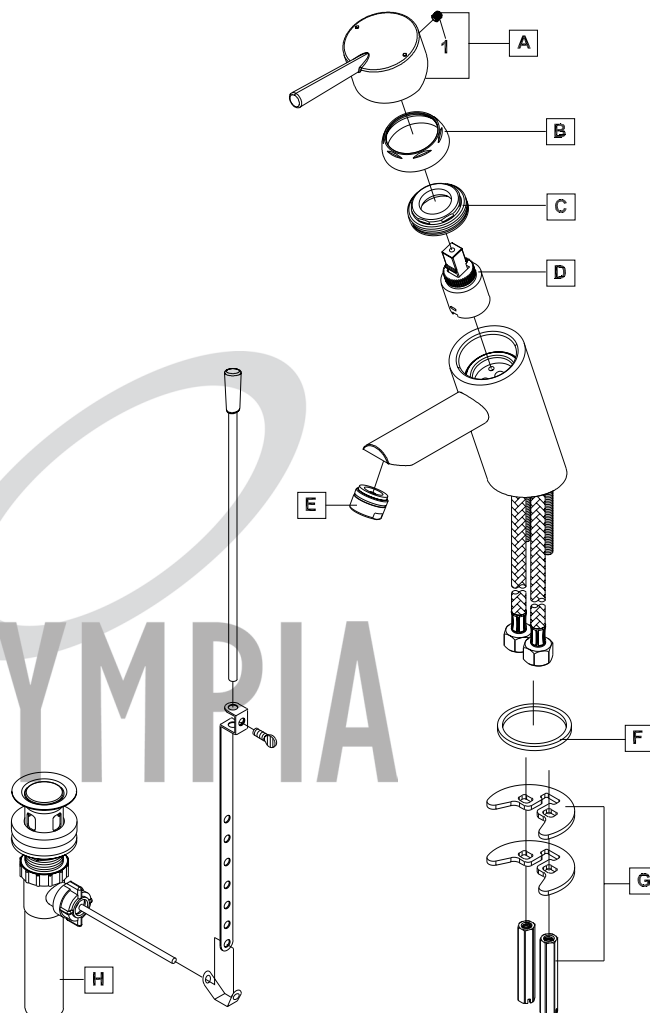

* Note- Please Specify finish/color code while ordering.

Nashville, TN
www.olympiafaucets.com
Olympia Faucets, Inc. © 2012
A Pioneer Industries Inc. Brand
DMSPL-6050/REV. 06/15