



**OLYMPIA FAUCETS, INC.**

Interchange City Distribution Center #20  
1277 Heil Quaker Boulevard  
La Vergne, TN 37086  
(888) 772-7701  
www.olympiafaucets.com

**Model Number:** L-6160H(CP, PVD BN), L-6161H,  
L-6162H

# INSTALLATION

**Tools:**



Basin Wrench   Adjustable Wrench   Plumbers Putty   Teflon Tape   Rags




**Warnings and Notes:**


Check with local plumbing code requirements before installation.  
This product should be installed by a local listed plumber.  
**Do not use plumbers putty on threads.**

## Installation Steps:


Single Handle Lavatory Faucet



(1) Shut off water supplies. Remove old faucet. Clean mounting surface in preparation for new faucet.



(2) Apply adequate plumbers putty along the boundary of base gasket. Thread mounting bolts to the bottom of faucet. Carefully lead both stainless steel flex inlet lines through center mounting holes, align faucet on the mounting surface. Slide mounting plate to the mounting bolts from underneath of the sink and thread mounting nut onto mounting bolts. Tighten mounting nut with help of basin wrench or adjustable wrench.




(3) Connect both hot (left) and cold (right) flex inlet lines to water supply valves. Note: Additional adapters or flex supply lines are required if outlet size of water supply valve is not 3/8" compression.




(4) Important: After installation is complete, remove aerator. Turn water supplies on and allow both hot and cold water to run at least one minute each. While water is running, check for leaks. Turn off water and replace aerator.


## Pop-up Drain Installation:




(1) Remove pop-up flange from body




(2) Place a ring of putty on the bottom of flange.




(3) Insert pop-up flange through drain hole and attach flange to body. Ensure the pop-up outlet faces towards the back of the sink. Tighten the locknut securely with a wrench. Do not overtighten.




(4) Remove the excess putty. Connect the trap (check manufacturer's instructions for installation)



(5) Remove pivot rod nut from pop-up body, ensure the washers is in place, insert pivot rod, tighten pivot rod nut back to pop-up body.




(6) Push pivot rod down, insert drain plug carefully. Test to ensure drain plug works properly.



(7) Connect lift rod strap to pivot rod by using clip. Tighten the thumbscrew to connect lift rod strap to pop-up lift rod.

## Exploded Drawing:

\* Note: Please specify finish/color when ordering.

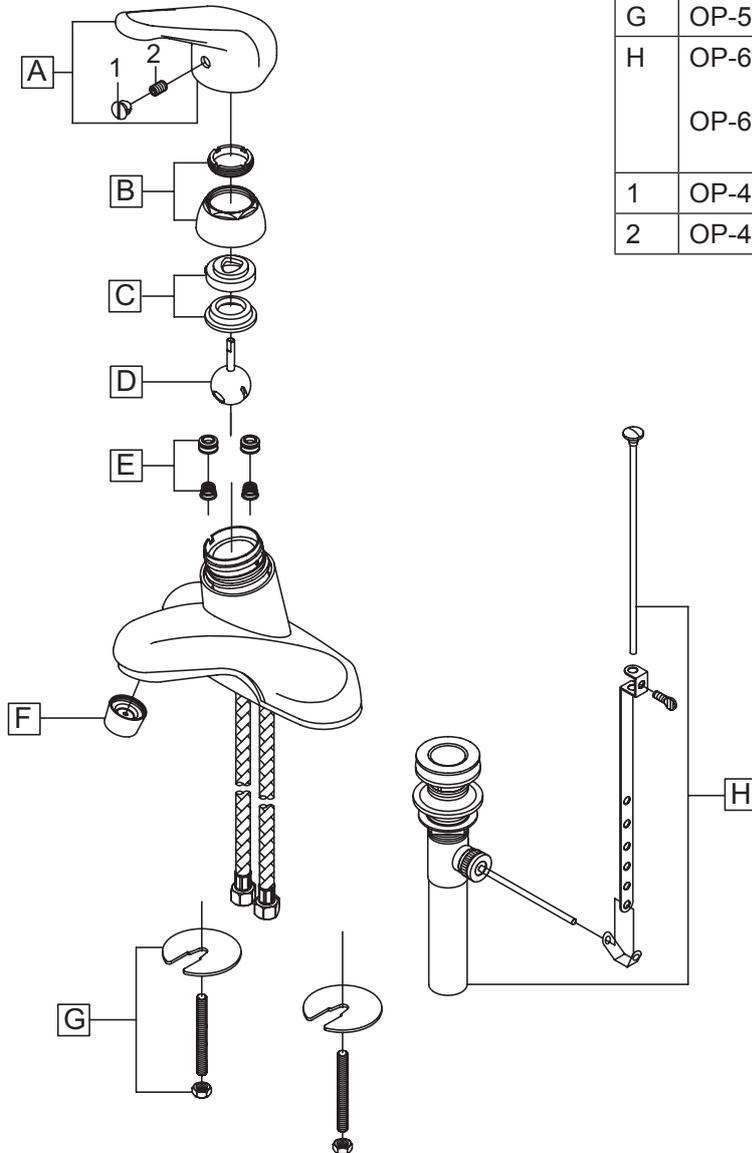

	ITEM #	DESCRIPTION
A	OP-190001*	Metal Lever Handle
B	OP-490003*	Cap & Adjusting Ring
C	OP-490004	Cam & Washer
D	OP-390001	Stainless Steel Ball
E	OP-490041	Springs and Seats
F	OP-490035*	1.5 GPM Aerator
G	OP-530001	Mounting Kit
H	OP-630004*	50/50 Pop-Up Drain Assembly (For L-6160H)
	OP-630002*	Brass Pop-Up Drain Assembly (For L-6162H)
1	OP-490002	Hot & Cold Indicator
2	OP-490043	Allen Screw

**OLYMPIA**

For more care information or trouble shooting inquiries about your Olympia product, Please call:

**OLYMPIA FAUCETS, INC.** (888) 772-7701

8AM - 8PM EST (5AM to 5PM PST)

[www.olympiafaucets.com](http://www.olympiafaucets.com)