

FLUID DISTRIBUTION MANIFOLDS COPPER / BRASS



P.P.P. DISTRIBUTION MANIFOLDS ARE:

- MANUFACTURED FROM COPPER AND BRASS COMPONENTS
- MANUFACTURED TO YOUR SPECIFIC REQUIREMENTS
- STANDARD STOCK ITEMS IN 2, 4, 6, AND 8 OPENING CONFIGURATIONS
- ADDITIONAL OPENING REQUIREMENTS MADE TO SPECIFICATION


APPLICATIONS:

- Multiple Floor Drain
- Trap Priming
- Hydronic Heating
- Solar Heating

MANIFOLD SPECIFICATIONS:

Manifolds are manufactured using type "L" copper tube and rough brass fittings. All solder used is 95-5, and we guarantee all solder joints to be water tight.

P/N PM-2 - OVERALL LENGTH - 6"
P/N PM-4 - OVERALL LENGTH - 10"
P/N PM-6 - OVERALL LENGTH - 14"
P/N PM-8 - OVERALL LENGTH - 18"
RISER - 7 5/8" x 1/2" NPT MALE
PRIMER LINE CONNECTION - 1/2" NPT FEMALE

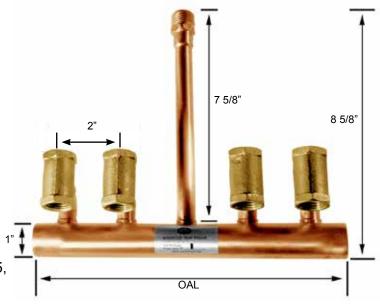



Precision Plumbing Products

Division of JL Industries. Inc.

802 SE 199th Avenue Portland, Oregon 97233 T (503) 256-4010 F (503) 253-8165

www.pppinc.net





