


# SR16

## 16" Short Riser Extension System Technical Data

### Specifications

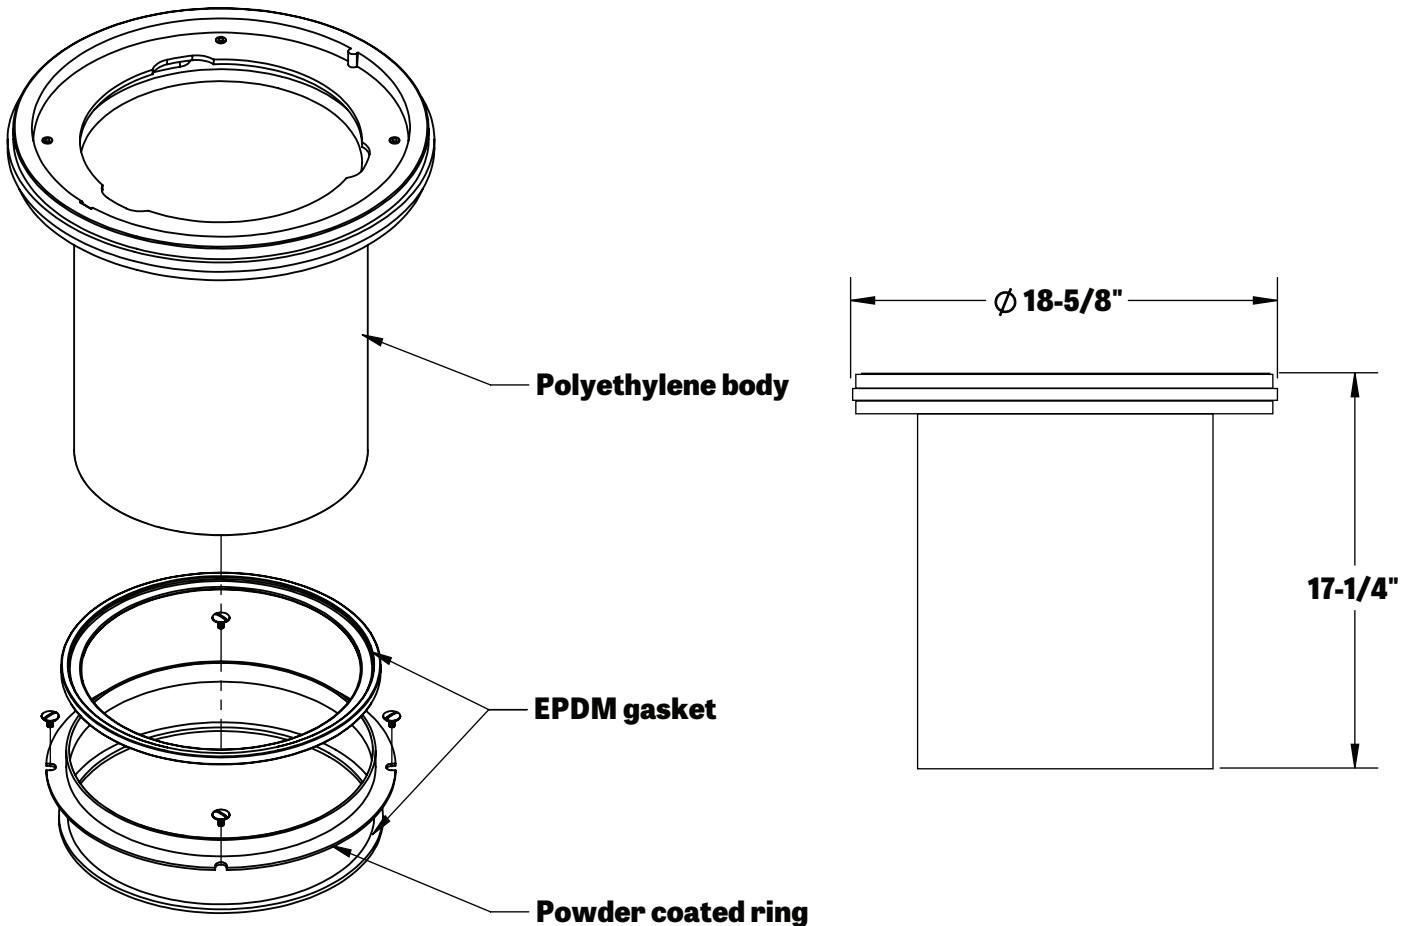

## SPECIFICATIONS

### NOTES:

1. Molded polyethylene body
2. EPDM neck gasket
3. Powder coated steel ring

### INSTALLATION NOTE:

Minimum install height - 2-1/8". Maximum install height - 16'-0".  
Do not stack risers. Maximum of one riser per base unit. Access to internal components will be compromised. If deeper invert required, install larger unit with 24" cover.

### ENGINEER SPECIFICATION GUIDE:

TeleGlide field adjustable riser system to consist of rotationally molded polyethylene body, EPDM gasket and powder coated steel ring. Risers shall allow onsite adjustability of cover to grade.



**SCHIER**  
LIFETIME GUARANTEED  
GREASE INTERCEPTORS

MODEL NUMBER:  
**SR16**

DESCRIPTION: 16" Short Riser Extension System

PART #: 8010-001-01

DWG BY: C. O'Boyle

DATE: 12/21/2015

REV: 0 \_/\_/\_/201\_

ECO: