

ELECTRONIC TRAP PRIMER

»» 695 SERIES

SPECIFICATION

Sioux Chief ETP™ electronic trap primers shall be used where replenishment of water in floor drain traps is required to prevent escape of sewer gas. Trap primer shall be listed and certified to ASSE 1044 and equipped with solenoid actuating device, vacuum breaker, distribution manifold, and proper electrical hardware. Water release is factory-set for daily release of 2 ounces. Frequency and duration of activation shall be adjustable. Trap primer shall be equipped with an ASSE 1010 arrester to protect the solenoid device. Trap primer shall be mounted in steel access boxes.

INSTALLATION

The number of traps serviced by any trap primer is a function of activation frequency and evaporation rate and should be determined by the design engineer and/or the installing contractor.

MATERIALS

Box housing: Galvanized steel

Arrester: Stainless steel, EPDM o-ring, plastic piston, Dow 111 lubricant

Distribution manifold: Type L copper tube

Outlet connection: Brass

Solenoid: Plastic housing, brass components

Vacuum breaker: Brass

ELECTRICAL

Connect unit to 120 VAC supply. Power consumption is 9.2 watts at 60 Hz. Maximum feet to electrical supply: 300 Ft. Minimum wire gauge: 18 ga. 3 amp circuit breaker included

DIMENSIONS



A: Inlet connection	1/2" female sweat
B: Outlet connections	5/8" OD compression*
Recessed Box Models	
C: Box height	12"
D: Box width	14.5" or 30.5"
E: Box depth	3.375"

Surface Mount Box Models

F: Box height	8-1/2"
G: Box width	7"
H: Box depth	4"

* Do NOT use thread sealant compounds on compression threads

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

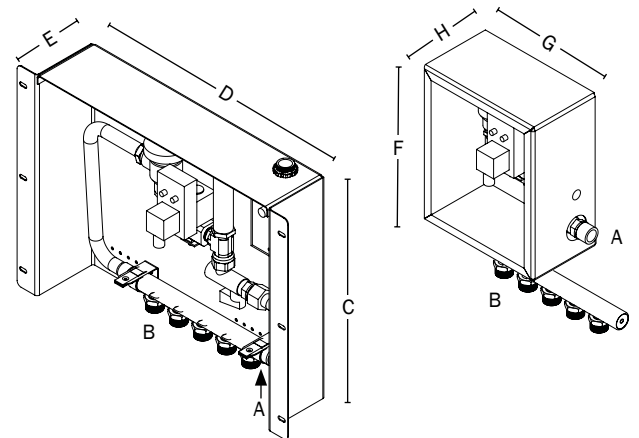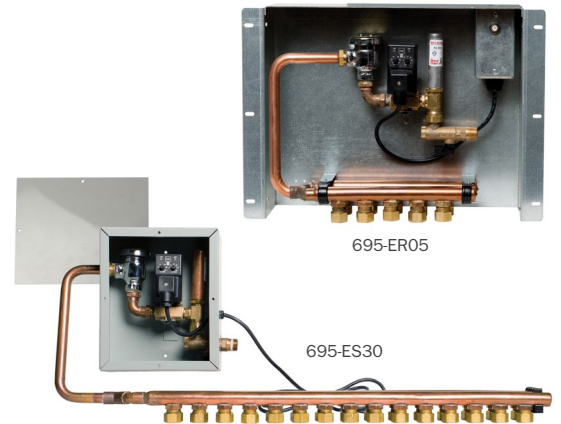

Create Item Number

695-AB

e.g. **695-ER15:** Electronic trap primer with 15 outlets (single manifold) in 12" x 30.5" recessed box

BOX TYPE A

ER = Recessed

ES = Surface mount

OUTLETS / MANIFOLD C

05 = 5 outlets / single manifold³

10 = 10 outlets / single manifold¹

10 = 10 outlets / double manifold^{2, 3}

15 = 15 outlets / single manifold⁴

20 = 20 outlets / double manifold⁴

30 = 30 outlets / double manifold⁴

Accessories - Available Separately:

971-1414: 14 x 14 Hinged metal access door

971-1430: 14 x 30 Hinged metal access door

1 ONLY available for surface mount box | 2 ONLY available for recessed box | 3 Recessed box size is 12" x 14.5" | 4 Recessed box size is 12" x 30.5"