

► Code Number

3910280

► Flush Cycle

Model 111-1.28 High Efficiency (1.28 gpf/4.8 Lpf)

► Description

Exposed Water Closet Flushometer, for floor mounted or wall hung top spud bowls.

► Specifications

Quiet, Exposed, Diaphragm Type, Chrome Plated Closet Flushometer for left or right hand supply with the following features:

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- ADA Compliant Metal Oscillating Non-Hold-Open Handle with Triple Seal Handle Packing
- Spud Coupling and Flange for 1½" Top Spud
- Sweat Solder Adapter with Cover Tube & Cast Wall Flange with Set Screw
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Flush Accuracy Controlled by CID Technology
- Diaphragm, Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance
- 1" I.P.S. Screwdriver Bak-Chek® Stop with free spinning vandal resistant stop cap
- SG - SaniGuard® coated handle


Valve Body, Cover and Tailpiece shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037.

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

► Fixtures

Consult factory for matching Sloan brand fixture options.

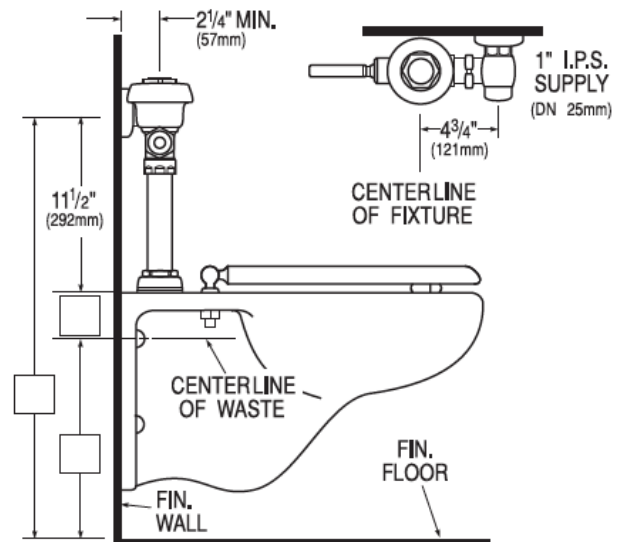

► Compliance & Certifications

Made In The
USA
HET
HIGH-EFFICIENCY TOILET



This space for Architect/Engineer Approval