



FLOOR OR SHOWER DRAINS WITH ADJUSTABLE STRAINER HEADS

General service floor drain for use in showers, toilets, kitchens and other finished areas where foot traffic is expected.

Load Rating: Light Duty having a Safe Live (Static) Load less than 2,000 lbs. (900 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

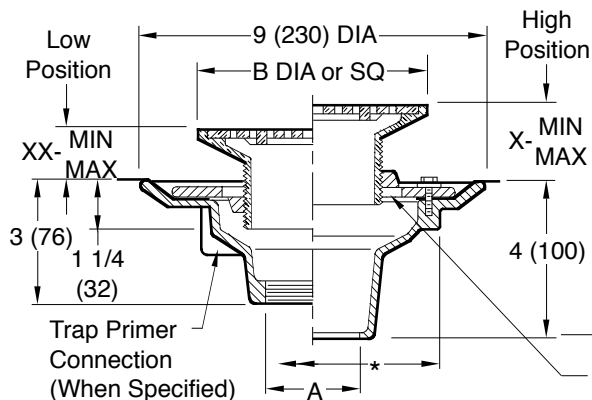

A (Pipe Size) = 02(50), 03(75) or 04(100)

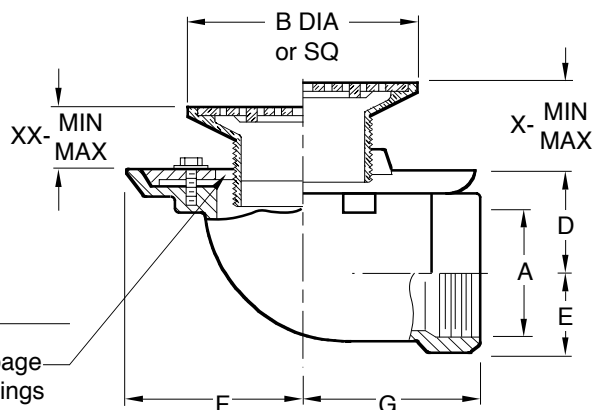

THREADED OUTLET

CAULK OUTLET

Fig. 2010C (A) ROUND TOP
Fig. 2010C (B) SQUARE TOP

Fig. 2015T. . . . (A) ROUND TOP
Fig. 2015T. . . . (B) SQUARE TOP

Strainer Size	*Collar In High Position		*Collar In Low Position		Free Area SQ IN (SQ CM)	
B	X		XX			
DIA or SQ	MIN	MAX	MIN	MAX	ROUND	SQUARE
05 (125)	1 1/4 (32)	2 1/4 (57)	3/4 (19)	1 5/8 (41)	7 (45)	6.5 (42)
06 (150)	1 1/4 (32)	2 1/4 (57)	3/4 (19)	1 5/8 (41)	9 (58)	12.5 (81)
07 (180)	1 1/4 (32)	2 1/4 (57)	7/8 (22)	1 7/8 (48)	14 (90)	11 (71)
08 (205)	1 1/2 (38)	2 1/2 (64)	1 (25)	1 7/8 (48)	17 (110)	14 (90)
*09 (230)	1 1/2 (38)	2 3/8 (60)	1 (25)	1 7/8 (48)	18 (116)	16 (103)
*10 (255)	1 1/2 (38)	2 3/8 (60)	1 (25)	1 7/8 (48)	23 (148)	16 (103)

•Add 3/8" (10) to all min./max. dimensions for round strainer.

••Not available for 05"(125) size strainer.

*Collar is reversible to obtain extreme high and low strainer positions.

A SIZE	B	D	E	F	G	MIN-X-MAX		MIN-XX-MAX	
02 (50)	05 (125)	3 1/4 (83)	1 1/2 (38)	4 3/4 (120)	5 (125)	1 1/4 (32)	2 1/4 (57)	3/4 (19)	1 5/8 (41)
03 (75)	06 (150)	2 3/4 (70)	2 1/4 (57)	4 3/4 (120)	5 (125)	1 1/4 (32)	2 1/4 (57)	3/4 (19)	1 5/8 (41)
04 (100)	08 (200)	3 1/4 (83)	3 1/4 (83)	6 (150)	4 (100)	1 1/2 (38)	2 1/2 (64)	-	-

REGULARLY FURNISHED:

Duco Cast Iron Body with Flashing Collar and Adjustable Strainer Head as Indicated by Suffix Letter Selected.

**Meets ASME Standard A112.6.3-2001
02(50), 03(75) or 04"(100) sizes only.**

VARIATIONS:

- ☐ Ball Float Backwater Valve -BFV
(Fig. 2015 only)
- ☐ Flapper Type Backwater Valve -V
- ☐ Hinged Gate -H
- ☐ Sediment Bucket -B
- ☐ Trap Primer Connection -P050 1/2" (13)
& -P075 3/4" (19)
- ☐ Vandal Proof Screws -U
- ☐ Wide Flanged Strainer (Specify Fig. DX 2010)
- ☐ T Threaded Outlet
- ☐ Quad Close Trap Seal
(Specify Fig. 2692) (Fig. 2010 Only)

OPTIONAL MATERIALS:

- ☐ Bronze Body -BB (Fig. 2010 only)
☐ Chrome Plated Strainer -CP
☐ Galvanized Cast Iron Body -G
☐ Nickel Bronze Strainer -NB
☐ Polished Bronze Strainer -PB
☐ All Stainless Steel [Specify Fig. 9700-A
(Fig. 2010 only)]
☐ Stainless Steel Strainers -SS
[Available in 05(125) & 06(150)
sizes only]

NOTE: Dimensions shown in parentheses are in millimeters.

U T S R	7-21-21 6-14-19 9-27-18 11-3-16	Added Header Removed Function Revised Table Revised Optional Materials	KK MW TBW TBW	JT JM CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2010, 2015
REV.	DATE	DESCRIPTION	BY	CKD. BY			



L					LOCATION																																																	
	OPTIONAL STRAINER HEADS																																																					
	ROUND STRAINER			FLAPPER TYPE BACKWATER VALVE																																																		
	MATERIALS: Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB Stainless Steel Strainers -SS [Available in 05(125) & 06(150) sizes only] VARIATIONS: *Hinged Grate (Specify Suffix -AH) Sediment Bucket -B Vandal Proof Screws -U <table border="1" style="width: 100%; font-size: 8px;"> <tr> <th>B DIA</th> <th>05 (125)</th> <th>06 (150)</th> <th>07 (180)</th> <th>08 (205)</th> <th>09 (230)</th> <th>10 (255)</th> </tr> <tr> <td>H</td> <td>2 (51)</td> <td>2 (51)</td> <td>2 1/4 (57)</td> <td>2 1/2 (64)</td> <td>2 1/2 (64)</td> <td>2 3/4 (70)</td> </tr> <tr> <td>X MIN</td> <td>1 1/4 (32)</td> <td>1 1/4 (32)</td> <td>1 1/4 (32)</td> <td>1 1/2 (38)</td> <td>1 1/2 (38)</td> <td>1 1/2 (38)</td> </tr> <tr> <td>X MAX</td> <td>2 1/4 (57)</td> <td>2 1/4 (57)</td> <td>2 1/4 (57)</td> <td>2 1/2 (64)</td> <td>2 1/2 (64)</td> <td>2 3/4 (70)</td> </tr> </table> SUFFIX -A Specify Type, Size & Finish eg: A05NB *Not available for 05" (125) size			B DIA	05 (125)	06 (150)	07 (180)	08 (205)	09 (230)	10 (255)	H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)	2 1/2 (64)	2 3/4 (70)	X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	1 1/2 (38)	1 1/2 (38)	X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	2 1/2 (64)	2 3/4 (70)	FUNCTION: Provides backwater protection at point where protection is needed. MATERIALS: Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB VARIATIONS: *Hinged Grate (Specify Suffix -AH) Vandal Proof Screws -U <table border="1" style="width: 100%; font-size: 8px;"> <tr> <th>B SQ</th> <th>05 (125)</th> <th>06 (150)</th> <th>07 (180)</th> <th>08 (205)</th> </tr> <tr> <td>H</td> <td>2 (51)</td> <td>2 (51)</td> <td>2 1/4 (57)</td> <td>2 1/2 (64)</td> </tr> <tr> <td>X MIN</td> <td>1 1/4 (32)</td> <td>1 1/4 (32)</td> <td>1 1/4 (32)</td> <td>1 1/2 (38)</td> </tr> <tr> <td>X MAX</td> <td>2 1/4 (57)</td> <td>2 1/4 (57)</td> <td>2 1/4 (57)</td> <td>2 1/2 (64)</td> </tr> </table> SUFFIX -AV Specify Type, Size & Finish eg: AV05NB *Not available for 05" (125) size			B SQ	05 (125)	06 (150)	07 (180)	08 (205)	H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)	X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)
	B DIA	05 (125)	06 (150)	07 (180)	08 (205)	09 (230)	10 (255)																																															
H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)	2 1/2 (64)	2 3/4 (70)																																																
X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	1 1/2 (38)	1 1/2 (38)																																																
X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	2 1/2 (64)	2 3/4 (70)																																																
B SQ	05 (125)	06 (150)	07 (180)	08 (205)																																																		
H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)																																																		
X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)																																																		
X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)																																																		
SQUARE STRAINER			STRAINER HEAD w/SQUARE HINGED COVER																																																			
MATERIALS: Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB VARIATIONS: Flapper Type Backwater Valve (Specify Suffix -BV) 05 (125), 06 (150), 07 (180) or 08" (205) sizes only *Hinged Grate (Specify Suffix -BH) Sediment Bucket -B Vandal Proof Screws -U <table border="1" style="width: 100%; font-size: 8px;"> <tr> <th>B SQ</th> <th>05 (125)</th> <th>06 (150)</th> <th>07 (180)</th> <th>08 (205)</th> <th>09 (230)</th> <th>10 (255)</th> </tr> <tr> <td>H</td> <td>2 (51)</td> <td>2 (51)</td> <td>2 1/4 (57)</td> <td>2 1/2 (64)</td> <td>2 1/4 (57)</td> <td>2 1/4 (57)</td> </tr> <tr> <td>X MIN</td> <td>1 1/4 (32)</td> <td>1 1/4 (32)</td> <td>1 1/4 (32)</td> <td>1 1/2 (38)</td> <td>1 1/2 (38)</td> <td>1 1/2 (38)</td> </tr> <tr> <td>X MAX</td> <td>2 1/4 (57)</td> <td>2 1/4 (57)</td> <td>2 1/4 (57)</td> <td>2 1/2 (64)</td> <td>2 1/4 (57)</td> <td>2 3/8 (60)</td> </tr> </table> SUFFIX -B Specify Type, Size & Finish eg: B05NB *Not available for 05" (125) size			B SQ	05 (125)	06 (150)	07 (180)	08 (205)	09 (230)	10 (255)	H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)	2 1/4 (57)	2 1/4 (57)	X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	1 1/2 (38)	1 1/2 (38)	X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	2 1/4 (57)	2 3/8 (60)	MATERIALS: Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB VARIATIONS: Gasketed Water Tight Cover -GC Secured Cover -SC Secondary Strainer Grate-SG SUFFIX -BS Specify Type, Size & Finish eg: BSNB																							
B SQ	05 (125)	06 (150)	07 (180)	08 (205)	09 (230)	10 (255)																																																
H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)	2 1/4 (57)	2 1/4 (57)																																																
X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	1 1/2 (38)	1 1/2 (38)																																																
X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	2 1/4 (57)	2 3/8 (60)																																																
REINFORCED ROUND STRAINER			REINFORCED TRACTOR STRAINER																																																			
FUNCTION: Used in finished floors where light wheeled loads are anticipated. MATERIALS: Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB VARIATIONS: Flapper Type Backwater Valve (Specify Suffix -CV) Sediment Bucket -B Vandal Proof Screws -U <table border="1" style="width: 100%; font-size: 8px;"> <tr> <th>B DIA</th> <th>05 (125)</th> <th>06 (150)</th> <th>08 (205)</th> <th>10 (255)</th> </tr> <tr> <td>H</td> <td>2 (51)</td> <td>2 (51)</td> <td>2 1/2 (64)</td> <td>2 3/4 (70)</td> </tr> <tr> <td>MIN</td> <td>1 1/4 (32)</td> <td>1 1/4 (32)</td> <td>1 1/2 (38)</td> <td>1 7/8 (48)</td> </tr> <tr> <td>MAX</td> <td>2 1/4 (57)</td> <td>2 1/4 (57)</td> <td>2 1/2 (64)</td> <td>2 3/4 (70)</td> </tr> </table> SUFFIX -C Specify Type, Size & Finish eg: C06NB			B DIA	05 (125)	06 (150)	08 (205)	10 (255)	H	2 (51)	2 (51)	2 1/2 (64)	2 3/4 (70)	MIN	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	1 7/8 (48)	MAX	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	2 3/4 (70)	FUNCTION: Used in finished floors where light weight wheeled loads are anticipated and loose set non-tilt tractor grate is desired. MATERIALS: Cast Iron -CI Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB VARIATIONS: Flapper Type Backwater Valve (Specify Suffix -DV or -EV) Sediment Bucket -B Vandal Proof Screws -U <table border="1" style="width: 100%; font-size: 8px;"> <tr> <th>SUFFIX</th> <th>B DIA</th> <th>H</th> <th colspan="2">X</th> </tr> <tr> <td></td> <td></td> <td></td> <td>MIN</td> <td>MAX</td> </tr> <tr> <td>-D</td> <td>07 (180)</td> <td>3 1/4 (83)</td> <td>2 5/8 (67)</td> <td>3 1/2 (89)</td> </tr> <tr> <td>-E</td> <td>09 (230)</td> <td>3 1/2 (89)</td> <td>2 3/4 (70)</td> <td>3 1/2 (89)</td> </tr> </table> SUFFIX -D-E Specify Type, Size & Finish eg: D07PB E09PB			SUFFIX	B DIA	H	X					MIN	MAX	-D	07 (180)	3 1/4 (83)	2 5/8 (67)	3 1/2 (89)	-E	09 (230)	3 1/2 (89)	2 3/4 (70)	3 1/2 (89)									
B DIA	05 (125)	06 (150)	08 (205)	10 (255)																																																		
H	2 (51)	2 (51)	2 1/2 (64)	2 3/4 (70)																																																		
MIN	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	1 7/8 (48)																																																		
MAX	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	2 3/4 (70)																																																		
SUFFIX	B DIA	H	X																																																			
			MIN	MAX																																																		
-D	07 (180)	3 1/4 (83)	2 5/8 (67)	3 1/2 (89)																																																		
-E	09 (230)	3 1/2 (89)	2 3/4 (70)	3 1/2 (89)																																																		
TILE FLANGE			ADJUSTABLE STRAINER HEAD																																																			
FUNCTION: Provides integral flange set 5/32"(4) below rim to receive floor covering. Flange may have option of tapped holes for securing pan and gasket. MATERIALS: Chrome Plated -CP Polished Bronze -PB Nickel Bronze -NB VARIATIONS: Flapper Type Backwater Valve (Specify Suffix -FV) Holes in Flange -SH Sediment Bucket -B Vandal Proof Screws -U <table border="1" style="width: 100%; font-size: 8px;"> <tr> <th colspan="2">X</th> </tr> <tr> <td>MIN</td> <td>MAX</td> </tr> <tr> <td>1 1/4 (32)</td> <td>2 1/8 (54)</td> </tr> </table> SUFFIX -F Specify Type, Size & Finish eg: F06NB			X		MIN	MAX	1 1/4 (32)	2 1/8 (54)	FUNCTION: Used in a non-traffic area when a funnel type strainer head is required and space does not allow use of the 3500 series funnel. The extended rim allows use as an anti-flood and anti-splash drip pan. VARIATIONS: Flapper Type Backwater Valve (Specify Suffix -F37V or F38V) MATERIALS: Cast Iron -CI Chrome Plated -CP Galvanized Cast Iron -G Polished Bronze -PB Nickel Bronze -NB <table border="1" style="width: 100%; font-size: 8px;"> <tr> <th>SUFFIX</th> <th>-F37</th> <th>-F38</th> </tr> <tr> <td>B DIA</td> <td>07 (180)</td> <td>09 (230)</td> </tr> <tr> <td>H</td> <td>3 1/4 (83)</td> <td>3 1/2 (89)</td> </tr> <tr> <td>X MIN</td> <td>2 5/8 (67)</td> <td>2 3/4 (70)</td> </tr> <tr> <td>X MAX</td> <td>3 1/2 (89)</td> <td>3 1/2 (89)</td> </tr> </table> SUFFIX -F37-F38 Specify Type, Size & Finish eg: F37NB F38CP			SUFFIX	-F37	-F38	B DIA	07 (180)	09 (230)	H	3 1/4 (83)	3 1/2 (89)	X MIN	2 5/8 (67)	2 3/4 (70)	X MAX	3 1/2 (89)	3 1/2 (89)																												
X																																																						
MIN	MAX																																																					
1 1/4 (32)	2 1/8 (54)																																																					
SUFFIX	-F37	-F38																																																				
B DIA	07 (180)	09 (230)																																																				
H	3 1/4 (83)	3 1/2 (89)																																																				
X MIN	2 5/8 (67)	2 3/4 (70)																																																				
X MAX	3 1/2 (89)	3 1/2 (89)																																																				
FIGURE NUMBER																																																						
L	10-26-20	Rev. Finish (Tractor Stainer)	MW	CL	FIGURE NUMBER 2010 SERIES OPTIONAL STRAINER HEADS 1 of 2																																																	
K	7-29-19	Added Load Rating(s)	MW	JM																																																		
J	6-18-19	Revised DIA to SQ Suf -AV, -B	TBW	TK																																																		
H	11-3-16	Revised Suffix-A	TBW	CL																																																		
REV.	DATE	DESCRIPTION	BY	CKD. BY																																																		

NOTE: Dimensions shown in parentheses are in millimeters.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FIGURE NUMBER

2010 SERIES OPTIONAL STRAINER HEADS

DRAWN BY: PJ

CHECKED BY: TD

APPROVED BY: TD

DATE: 5-17-85

SCALE: NONE

SIZE: A

DRAWING NUMBER

PM0457 SH 2 of 2

K

SMITH® JAY R. SMITH MFG. CO.®

MEMBER OF MORRIS GROUP INTERNATIONAL

POST OFFICE BOX 3237

MONTGOMERY, ALABAMA 36109-0237 (USA)

TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com

ASPE

MEMBER OF:

PD

INSTITUTE

ASSE

INTERNATIONAL

LOCATION


OPTIONAL STRAINER HEADS

LOW DOME STRAINER

FUNCTION: Used in gutters and recessed areas where excessive debris build-up is expected. Dome insures drainage even when partly covered.

MATERIALS:
Chrome Plated -CP
Polished Bronze -PB
Nickel Bronze -NB

VARIATIONS:
Flapper Type Backwater Valve (Specify Suffix -GV)
Sediment Bucket -B
Vandal Proof Screws -U



B DIA	05 (125)	06 (150)	08 (205)
H	2 (51)	2 (51)	2 1/2 (64)
MIN	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)
MAX	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)

SUFFIX -G Specify Type, Size & Finish eg: G08PB

SOLID HINGED COVER

FUNCTION: Used in areas where intermittent drain use is required. Solid cover prevents intrusion of chips, saw-dust, etc., which are swept up before cover is opened for washdown. The secondary strainer prevents debris from entering the waste line.

MATERIALS:
Chrome Plated -CP
Polished Bronze -PB
Nickel Bronze -NB

VARIATIONS:
Flapper Type Backwater Valve (Specify Suffix -GV)
Vandal Proof Screws -U



B DIA	05 (125)	06 (150)	07 (180)	08 (205)
H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)
X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)
MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)


SUFFIX -H Specify Type, Size & Finish eg: H05CP

SPANNER WRENCH COVER

FUNCTION: Solid gas tight, vandal proof, threaded cover for areas where intermittent drain use is required.

MATERIALS:
Chrome Plated -CP
Polished Bronze -PB
Nickel Bronze -NB

VARIATIONS:
Flapper Type Backwater Valve (Specify Suffix -JV)
Sediment Bucket -B



	X
MIN	MAX
2 (51)	3 (76)


SUFFIX -J Specify Type, Size & Finish eg: J06NB

REINFORCED SQUARE STRAINER

FUNCTION: Used in finished floors where some light wheeled traffic is anticipated.

MATERIALS:
Chrome Plated -CP
Polished Bronze -PB
Nickel Bronze -NB

VARIATIONS:
Flapper Type Backwater Valve (Specify Suffix -KV)
Sediment Bucket -B
Vandal Proof Screws -U



B SQ	05 (125)	06 (150)	07 (180)	08 (205)
H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)
X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)
MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)

SUFFIX -K Specify Type, Size & Finish eg: K07CP

RECTANGULAR STRAINER

FUNCTION: Used in finished floors where light wheeled loads and or heavy foot traffic are anticipated.

MATERIALS:
Chrome Plated -CP
Polished Bronze -PB
Nickel Bronze -NB

VARIATIONS:
Sediment Bucket -B
Vandal Proof Screws -U



SUFFIX	L	M	N	P	R	T
B x B'	4 1/2(115)x8(205)	4(100)x12(305)	5(125)x9(230)	5(125)x13(330)	6(150)x10(255)	5(125)x17(430)
H	2 1/4 (57)	2 1/2 (64)	2 1/4 (57)	3 (76)	2 1/4 (57)	3 (76)
X MIN	1 3/8 (35)	1 7/8 (48)	1 3/8 (35)	2 1/8 (54)	1 3/8 (35)	2 1/4 (57)
MAX	2 3/8 (60)	2 3/4 (70)	2 3/8 (60)	3 (76)	2 3/8 (60)	3 1/8 (79)


SUFFIX -L-M-N-P-R-T Specify Type, Size & Finish eg: LNB

ANGLE STRAINER

FUNCTION: Shower room drain set at wall and floor junction. Vertical grate openings prevent drain stoppage should flat surface become covered.

MATERIALS:
Chrome Plated -CP
Polished Bronze -PB
Nickel Bronze -NB

VARIATIONS:
Vandal Proof Screws -U



SUFFIX	B	C	D	X
				MIN MAX
-V	3 1/2 (89)	3 1/2 (89)	4 1/2 (115)	1 5/8 (41) 2 5/8 (67)
-W	6 3/4 (170)	6 3/4 (170)	6 1/2 (165)	1 5/8 (41) 2 5/8 (67)


SUFFIX -V-W Specify Type, Size & Finish eg: VPB, WNB

EXTENSION ADAPTOR

FUNCTION: Used when a strainer head must be raised to accommodate deeper floor fill.

REGULARLY FURNISHED:
Ducto Cast Iron -CI

MATERIALS:
Cast Bronze -CB
Galvanized Cast Iron -G



NOTE: Extension can be stacked for increased maximum adjustment.


SUFFIX -X

OVERFLOW WITH STANDPIPE

FUNCTION: Used as overflow drain in decorative pools, fish ponds or similar areas. Dome prevents floating objects from entering drain line.

MATERIALS:
Chrome Plated -CP
Nickel Bronze -NB
Polished Bronze -PB

VARIATIONS:
Less Dome -LD
Standpipe Height other than 6" (150) (Specify Height)



SUFFIX	A	X
	SIZE	MIN MAX
-Y	2 (51)	3/4 (19) 2 1/8 (54)
-Z	3 (76)	3/4 (19) 2 1/8 (54)


SUFFIX -Y-Z Specify Type, Size & Finish eg: YCP, ZCP

HEAVY DUTY ADJUSTABLE


FUNCTION: Used in finished floors where light wheeled loads and or heavy foot traffic are anticipated.


MATERIALS:
Polished Bronze -PB
Rough Bronze -RB
Nickel Bronze -NB

VARIATIONS:
Flapper Type Backwater Valve (Specify Suffix -69V)
Sediment Bucket -B
Vandal Proof Screws -U




SUFFIX -69 eg: A06NB-69









K

J

H

G

F

10-20-17
1-17-12
8-24-99
6-11-99
1-22-99

Rev. Materials Suffix -H, -V-W
Rev. Variations of Suffix -J
Revised
Revised Tables
T Strainer was S Strainer

TBW
TBW
TBW
CMD
TBW

CL
AM
BS
BS

REV.

DATE

DESCRIPTION

BY

CKD. BY

FIGURE NUMBER

2010 SERIES OPTIONAL STRAINER HEADS

2 of 2

FIGURE NUMBER

2010 SERIES OPTIONAL STRAINER HEADS

2 of 2

NOTE: Dimensions shown in parentheses are in millimeters.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov