

# TOTO®

# MW6342044CEFG

## Supreme® II Connect+™ Toilet, 1.28GPF with Washlet® C200 Connect+

### FEATURES

- Concealed supply connection for seamless installation.
- High-efficiency Tornado Flush™ (1.28GPF/4.8LPF)
- CeFiONtect™ glaze prevents debris from sticking to ceramic surfaces for easy cleaning
- Universal Height
- Elongated front bowl
- Decorative one-piece design with high-profile tank
- Chrome trip lever
- 12" Rough-in, less supply
- See Spec sheet SW2044T20 for Washlet features

### MODELS

- CST634CEFGT20 - With CeFiONtect glaze

### REQUIRED WASHLET CONNECT+

- SW2044T20 Washlet® C200 Connect+  
Fits TOTO Connect+ toilet bowl models only

### COLORS/FINISHES

- Standard  
#01 Cotton

### PRODUCT SPECIFICATION

The one-piece high-efficiency Tornado Flush toilet shall be 1.28GPF/4.8LPF. Universal Height Toilet with CeFiONtect glaze finish. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be **TOTO Model CST634CEFGT20#01**.

See TOTO Specification sheet **SW2044T20** for details on required Washlet.



CeFiONtect

connect+



Tornado Flush

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)



# MS6342044CEFG

## Supreme® II Connect+™ Toilet, 1.28GPF with Washlet® C200 Connect+

### SPECIFICATIONS


- Water Use 1.28 GPF/4.8LPF
- Flush System Tornado Flush™
- Min. Water Pressure 8 psi (flowing)
- Water Surface 7-1/8" x 9-1/8"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-1/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight CST634CEFGT20 104lbs.  
SW2044T20 16.0lbs.
- Shipping Dimensions CST634CEFGT20  
29-1/2" L x 18" W  
x 19-1/4" H¹ x 27-1/8" H²  
SW2044T20  
23 1/2" X 19" X 9"

- See Spec sheet **SW574T20** for Washlet details


### INSTALLATION NOTES

#### Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

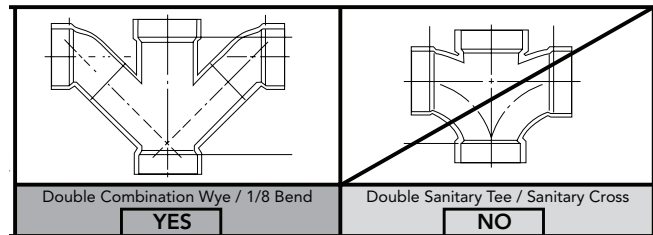

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

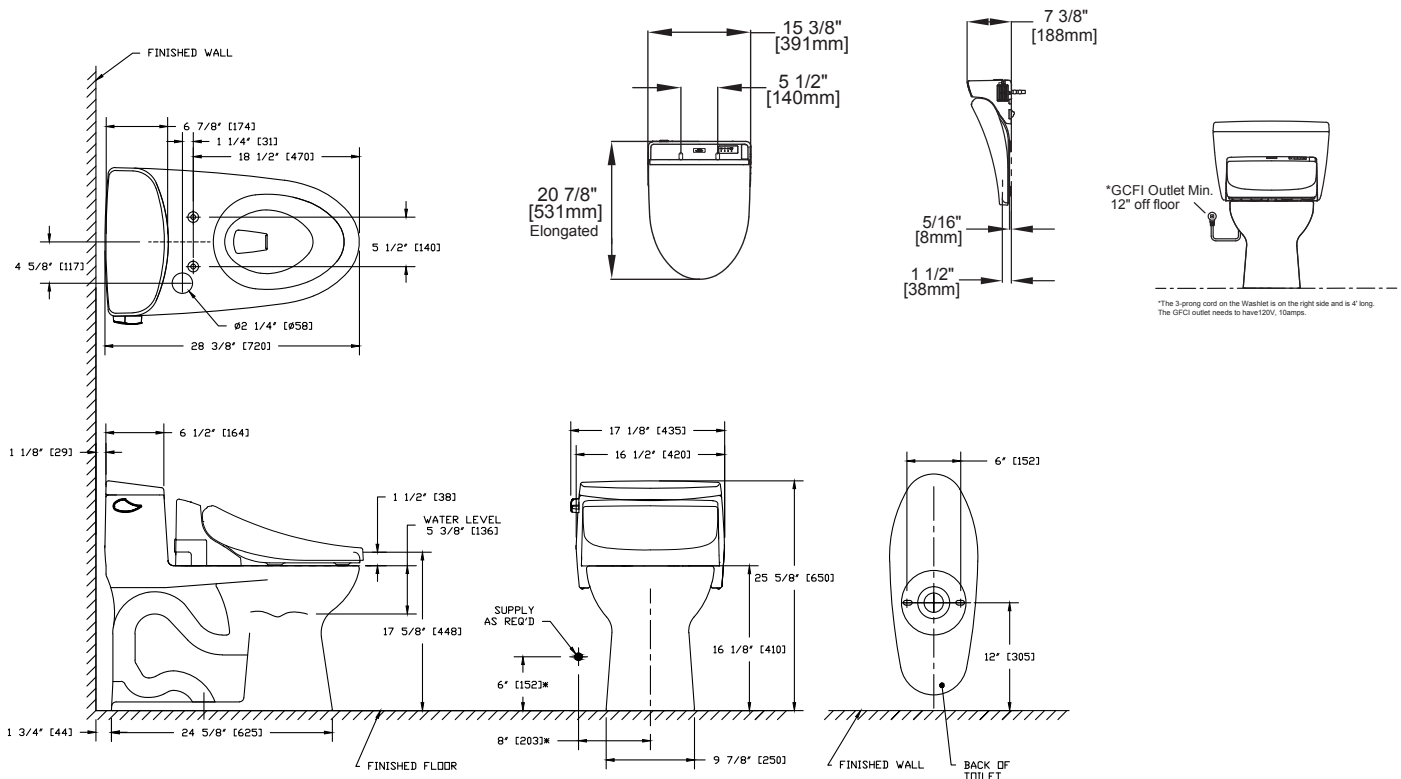

\*SUGGESTED DIMENSIONS

RD-XXXXX, MW6342044CEFG, V.01

**TOTO**

These dimensions and specifications are subject to change without notice

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

SS-01157 v.03