

TL960DD12

Soirée[®] Widespread Lavatory High-Efficiency Faucet, 1.2 gpm

FEATURES

- WaterSense certified low-flow 1.2 gpm (4.5 lpm) faucet
- Lever handles
- Solid brass construction
- Ceramic disk valve cartridge
- Accommodates 8"-16" spread
- Metal pop-up drain assembly included



COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel

CODES/STANDARDS

- Complies with federal and state lead-free legislation
- Meets or exceeds ASME A112.18.1/CSA B125.1, NSF 61-9, NSF 372
- Certifications: IAPMO(cUPC), EPA WaterSense, California Energy Commission (CEC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, City of New York and others
- ADA compliant



PRODUCT SPECIFICATION


The widespread lavatory faucet shall have a maximum flow rate of 1.2 gpm (4.5 lpm). Product shall have lever handles. Product shall have a solid brass construction. Product shall have a ceramic disk valve cartridge. Product shall accommodate 8"-16" spread. Product shall include metal pop-up drain assembly. Product shall be TOTO Model TL960DD12#____.


TL960DD12

Soirée[®] Widespread Lavatory High-Efficiency Faucet, 1.2 gpm

SPECIFICATIONS

Warranty	Lifetime Limited Warranty (Residential Use) One Year (Commercial Use)
Material	Brass
Maximum Flow Rate	1.2 GPM (4.5 LPM)
Shipping Weight	11.5 lbs.
Shipping Dimensions	20-1/2"L x 9-3/4"W x 3-1/2"H

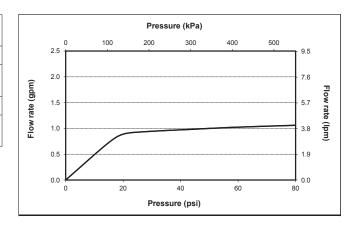

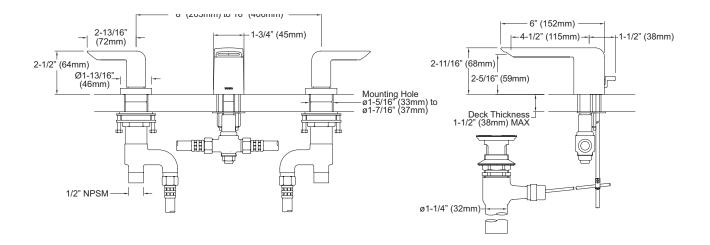

These dimensions and specifications are subject to change without notice