

TruFLOW™ Sr. Manifold End Cap with Drain and Vent Kit

Submittal Information
Revision A: Feb. 29, 2008

Project Information


Job Name:	
Location:	Part No. Ordered:
Engineer:	Date Submitted:
Contractor:	Submitted By:
Manufacturer's Representative:	Approved By:

Technical Data

Material:	UNS C3850 Brass
Maximum Working Pressure:	145 psi
Maximum Temperature/Flow:	220°F (104°C)/21.0 gpm
Connection:	1¼" BSP

Product Information and Application Use

TruFLOW™ Sr. Manifold End Cap with Drain and Vent has 1¼" male BSP thread to connect into the TruFLOW Manifold Reducing Bushing supplied in the kit. The bushing has 1¼" female BSP threads with 1½" male BSP threads that connect into the TruFLOW Sr. Manifold body. This end cap comes standard with a manual purge vent on top and a garden hose threaded connection on the drain. Use Uponor Silicone Oil (A2620007) sold separately, on the male threads to ease installation.

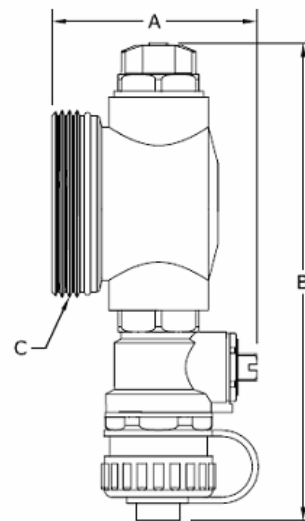

✓ Description	Part Number	A	B	C	Weight
TruFLOW Sr. Manifold End Cap with Drain and Vent Kit	A2651250	2.45"	4.97"	1¼" BSP	0.80 lbs.

Installation

The TruFLOW Sr. Manifold End Cap with Drain and Vent Kit comes as an accessory already installed on the Uponor TruFLOW Manifold. The Automatic Vent with Check Valve is purchased as a separate accessory and installs on the top of the existing TruFLOW Sr. Manifold End Cap with Drain and Vent. Use Uponor Accessories: Replacement O-ring for 1¼" BSP Connections (A2620008); Silicone Oil (A2620007). Refer to the Uponor Radiant Installation Handbook for additional information.

Standards

ASTM F877

Codes

N/A

Listings

NSF-rfh

Related Applications

Radiant Heating and Cooling Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: (800) 321-4739
Fax: (952) 891-2008
www.uponor-usa.com

Uponor Ltd.
655 Park Street
Regina, SK S4N 5N1 CANADA
Phone: (888) 994-7726
Fax: (800) 638-9517
www.uponor.ca